MUTOH

Creation, we make it happen...

ValueCut Serisi
Kullanıcı Kılavuzu

V.4 2013 Feb.

NOT

Mutoh önceden haber vermeksizin herhangi bir zamanda bu kullanım kılavuzunda yer alan bilgileri değiştirme hakkını saklı tutmaktadır; izinsiz değişiklik, kopyalama dağıtım veya görüntüleme yasaktır. Tüm yorumlar, sorgular veya bu kılavuzu ile ilgili öneriler için , yerel satıcınıza danışın.

V.4 2013 Feb.

Önemli Bilgi

ValueCut Plotter Kesim cihazımızı satın aldığınız için teşekkür ederiz. Kesici plotter cihazımızı kullanmadan önce. Aşağıdaki güvenlik önlemlerini ve talimatlarını okuduğunuzdan, emin olun.

Dikkat

GÜVENLİK ÖNLEMLERİ!

- Cihazı taşıma sırasında güvenlik endişesi yaşamamak için, kesiciyi lütfen en alttan tutun. Kesicinin her iki tarafında bulunan girintili kısımlardan tutarak hareket ettirmeyin.

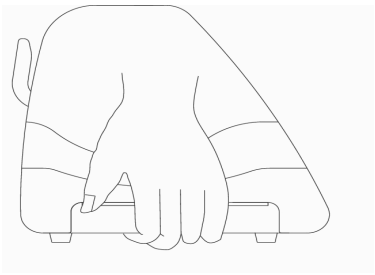

O (Doğru)



X (Yanlış)

- Cihazın çalışması esnasında yaralanmalara sebebiyet vermemek için, ellerinizi cihazın hareket ettiği bölgelere yaklaştırmayın.

- Hazardous moving parts keep fingers and other body parts away!

- Do not shake or drop the blade holder, a blade tip can fly out.
- During an operation, do not touch any of the moving parts of this machine (such as the carriage). Also be careful to make sure that clothing and hair do not get caught.
- Always connect the power cable to a grounded outlet.
- Always use the accessory power cable which is provided. Do not wire the power cable so that it becomes bent or caught between objects.
- Do not connect the power cable to branching outlet to which other machines are also connected, or use an extension cable. There is danger of overheating and of mis-operation of the machine.
- Keep the tools away from children where they can reach.
- Always put the pinch rollers within the white marks.

Note: Never press the top release grip (the release grip is fully pressed when a clip sound is heard) and pull the bottom release grip at the same time as the pictures shown below. This will prevent you from disabling the pinch roller as the stop bar will not reach the correct position and therefore will not be functioning.

O (CORRECT)

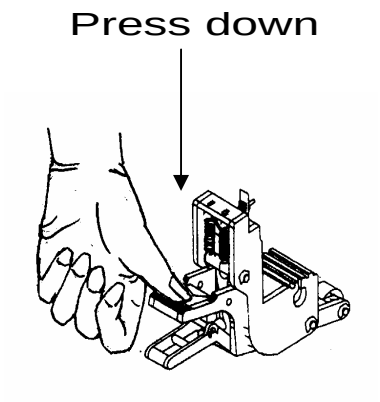

DISABLE

✕ (INCORRECT)

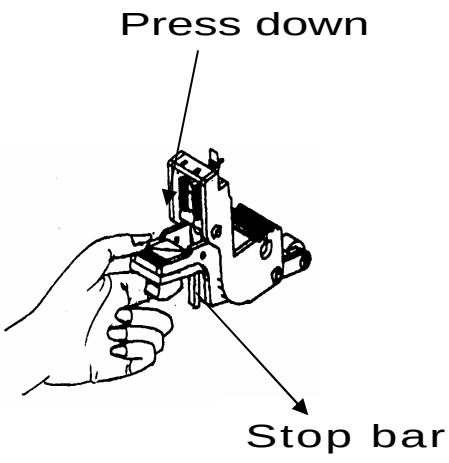

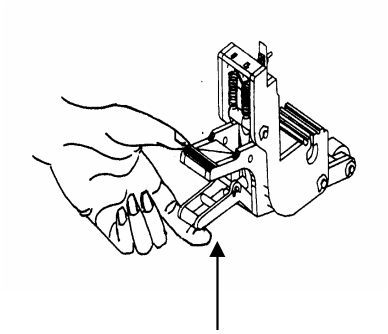

Pull up bottom to release grip **ENABLE**

Table of Contents

Important Information

1. General Information

1.1 Introduction 1-1
1.2 Package Items 1-1
1.3 Product Features 1-2
1.4 Appearance of ValueCut
1.4.1 The Front View 1-3
1.4.2 The Back View 1-3
1.4.3 The Whole View 1-4
1.4.4 The Left-hand Side 1-4
1.4.5 The Right-hand Side 1-5

2. Installation

2.1 Precaution 2-1
2.2 Stand & Flexible Media Support System 2-2
2.3 Desktop Flexible Media Support System 2-6
2.4 Installation of Media Basket System 2-8
2.5 Cutting Pad Installation 2-11
2.6 Blade Installation 2-13
2.7 Automatic Blade Length Detection 2-15
2.8 Cable Connections 2-17
2.8.1 USB Interface 2-17
2.8.2 Driver Un-installation 2-20
2.8.3 RS-232 Interface 2-23
2.8.4 Data Transmitting 2-23

3. The Control Panel

3.1 The LCD Panel 3-1
3.2 Menu in On-line Mode 3-2
3.3 Menu in Off-line Mode 3-3
3.4 Menu Items 3-4

4. Operation

4.1 Media Loading
4.1.1 Loading the Sheet Media 4-1
4.1.2 Loading the Roll Media 4-3
4.2 Tracking Performance 4-5
4.3 Cutting Force and Offset Adjustment 4-7
4.4 How to Cut 3mm Letter 4-8
4.5 How to Make A Long Plot 4-8
4.6 When Completing the Cutting Job 4-9
4.7 ValueCut Print Driver setting 4-10
4.7.1 Option Page 4-10
4.7.2 Paper Page 4-12

5. Automatic Aligning System

5.1 Introduction 5-1
5.2 Calibrating the System 5-2
5.2.1 Media Calibration 5-2
5.2.2 AAS Calibration 5-2
5.2.3 AAS II on ValueCut 5-3
5.2.4 Automatic Distinction of the Plot Direction 5-5
5.3 Printer Test 5-5
5.4 Registration Mark Offset Range 5-7
5.5 Contour Cutting 5-7
5.6 Tips for AAS 5-9

6. Maintenance

6.1 Cleaning the cutting Plotter 6-1
6.2 Cleaning the Grid Drum 6-2
6.3 Cleaning the Pinch Rollers 6-2

7. Trouble Shooting

7.1 Non-Operational Problems 7-1
7.2 Operational Problems 7-2
7.2.1 LCM Error Messages 7-2
7.2.2 Other operational problems 7-3
7.3 Cutting Plotter/Computer Communication Problems 7-5
7.4 Software Problems 7-6
7.5 Cutting Quality Problems 7-7

Appendix

A-1 ValueCut Specification A-1
A-2 Blade Specification A-2
A-3 Consumable and Optional Item List A-3
A-4 CorelDRAW Plug-In Instruction A-4
A-5 Illustrator Instruction A-5

1. General Information

1.1 Introduction

ValueCut series cutting plotters have been designed to produce computer-generated images or perform contour cutting on sheets or rolls of vinyl media.

This manual covers the following models of ValueCut series cutting plotters:

• VC-600	for media width: 50mm(1.97") ~ 770mm(30.3")
• VC-1300	for media width: 50mm(1.97") ~ 1594mm(62.7")
• VC-1800	for media width: 300mm(11.8") ~ 1900mm(74.8")

1.2 Package Items

The package of the ValueCut model contents the items listed below, please check carefully. If you find any item missing, please consult your local dealer for further assistance.

<table>
<tr><th>Standard Item</th><th>Quantity</th></tr>
<tr><td>1. Cutting Plotter</td><td>1</td></tr>
<tr><td>2. Stand Set (for VC-1300/1800 only)(Optional for VC-600)
● 2 piece of T-shape stand
● 1 piece of stand beam
● 18 pieces of M6 screws
● 1 piece of M5 L-shape hexagon screw driver
● 1 piece of Installation Guide for Stand Set</td><td>1</td></tr>
<tr><td>3. Flexible Media Support System Package
<table>
<tr><th>Items</th><th>VC-1300/1800 Only</th><th>VC-600</th></tr>
<tr><td>1 set of Roll Media Flange (2 pieces)</td><td>V</td><td>V</td></tr>
<tr><td>1 set of Roll Holder (2 pieces)</td><td>V</td><td>V</td></tr>
<tr><td>1 set of Roll Holder Guide Bushes (4 pieces)</td><td>V</td><td>V</td></tr>
<tr><td>1 set of Roll Holder Support (2 pieces)</td><td>V</td><td>V</td></tr>
<tr><td>1 piece of M6 L-shape hexagon screw driver</td><td>V</td><td>V</td></tr>
<tr><td>1 piece of Installation Guide for Roll Holder</td><td></td><td>V</td></tr>
<tr><td>1 piece of M5 L-shape hexagon screw driver</td><td></td><td>V</td></tr>
<tr><td>1 set of Desktop Support Brackets (2 pieces)</td><td></td><td>V</td></tr>
<tr><td>4 pieces of Plastic Foot</td><td></td><td>V</td></tr>
<tr><td>4 pieces of M4 screws</td><td></td><td>V</td></tr>
<tr><td>12 pieces of M6 screws</td><td></td><td>V</td></tr>
<tr><td>1 piece of M4 L-shape hexagon screw driver</td><td></td><td>V</td></tr>
</table></td><td>1</td></tr>
</table>

4. Accessories ● 1 piece of User's Compact Disk ● 1 piece of data cable (RS-232C) ● 1 piece of data cable (USB cable) ● 1 set of Blade Holder Assembly (Installed in tool carriage of the cutting plotter) ● 1 piece of Blade (45°with Red Cap/ Installed in Bl ade Holder) ● 1 piece of Safe Blade ● 1 piece of Cutting Pad for Vinyl cutting ● 1 piece of Tweezers ● 1 Oily ball-point pen	**1**

1.3 Product Features

The following are the main features of the ValueCut series cutting plotters:

- Tri-port connectivity provides you with greater flexibility
- Up to 600-gram cutting force
- Up to 60-inch/per second cutting speed
- Guaranty 10-meter tracking
- User friendly, multi-language control panel
- Ingenious media basket (optional item)
- Enhanced Automatic Aligning System for automatic contour cutting

1.4 Appearance of ValueCut

1.4.1 The Front View (Şekil 1-1)

Grid Drums – move the media back and forth during operation.

Tool Carriage – performs the cutting with the installed blade and pen with AAS module.

Control panel – consists of 14 control keys and 1 LED and 1 LCM showing messages and menus.

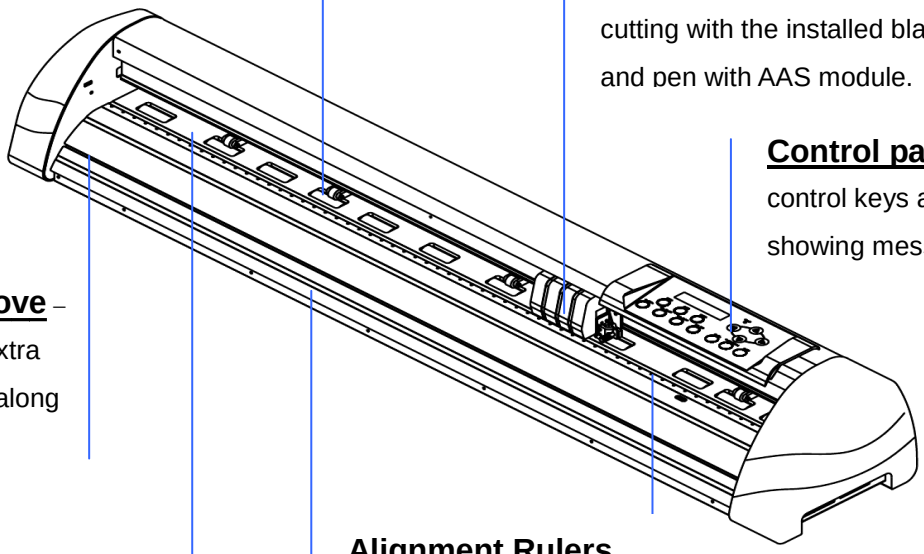

Slicer Groove – slice off the extra media easily along this groove.

Platen – provides the surface for holding and supporting media while performing cutting.

Alignment Rulers – media can be aligned with the clear guide line marks.

Cutting Pad – provides the protection of blade when the blade is cutting.

Şekil 1-1

1.4.2 The Back View (Şekil 1-2)

Lever – raises or lowers the pinch rollers.

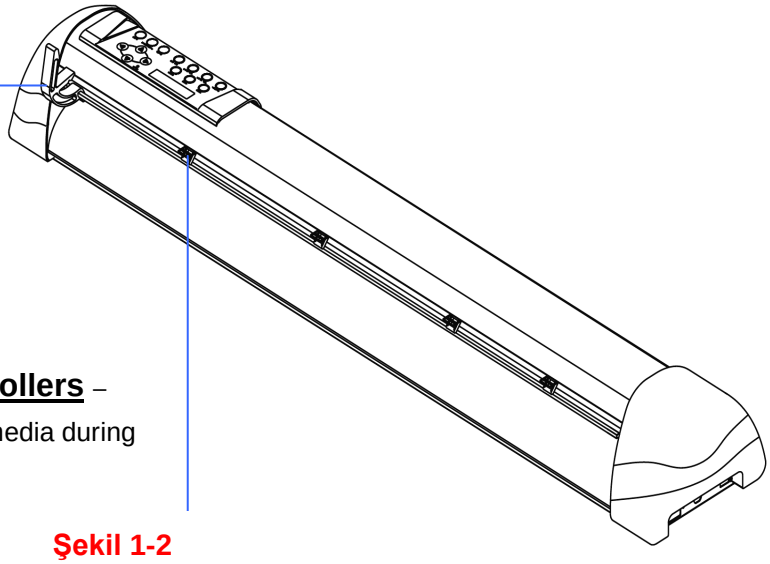

Pinch Rollers – hold the media during cutting.

Şekil 1-2

1.4.3 The Whole View of ValueCut (Şekil 1-3)

Roll Holder – holds and supplies the roll media for cutting.

Roll Holder Guide Bushes – serve to keep the roll media in place when media is pulled from the roll.

Roll Holder Support – supports roll holders.

T-Stand –supports the cutting plotter

T-Stand –supports the cutting plotter

Stand Beam – stabilizes the body.

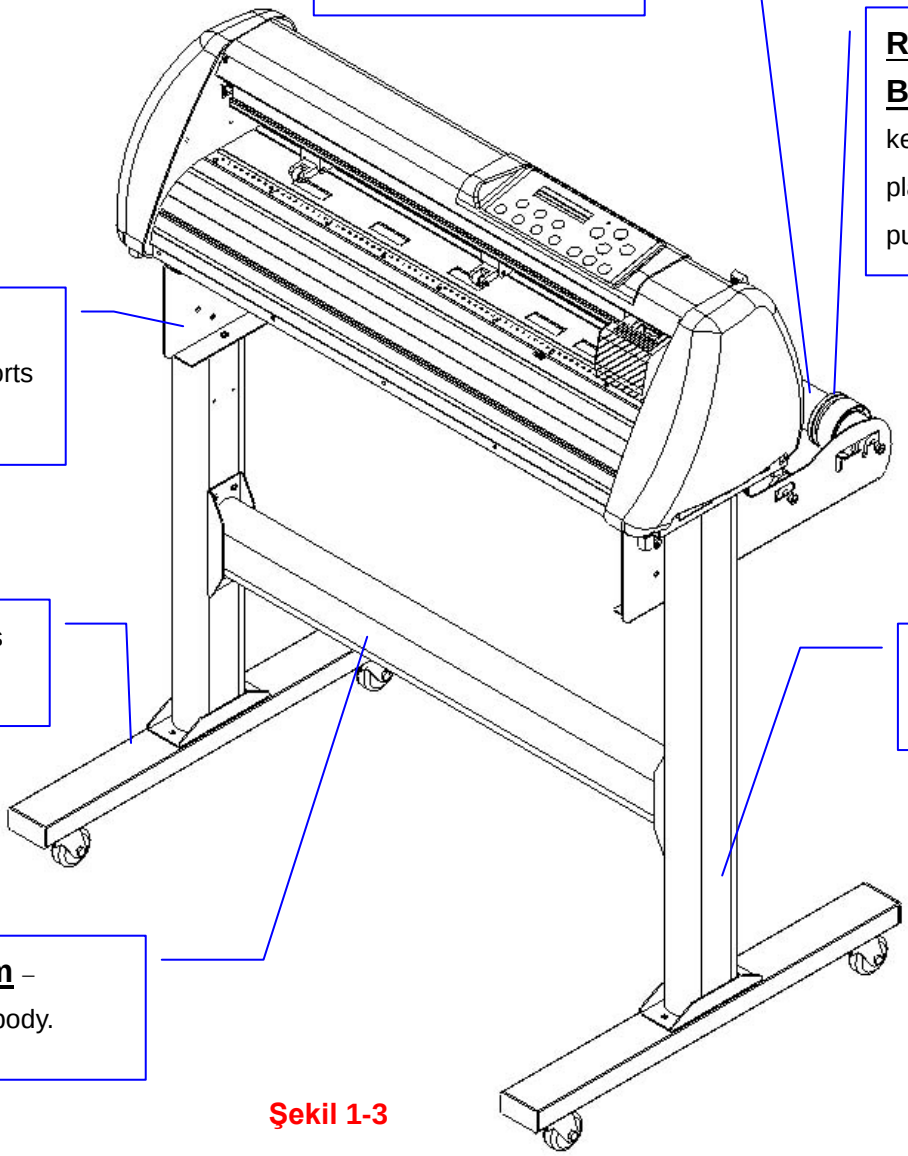

Şekil 1-3

1.4 4 The Left-hand Side (Şekil 1-4)

Şekil 1-4

Power Switch – On when switches to [I]; Off to [O]

Fuse – 3 Amp.

AC Power Connector – used to insert the AC power cord.

1.4.5 The Right-hand Side (Şekil 1-5)

Serial Interface Connector (RS232C) – used to connect the cutting plotter to a computer through a serial interface cable.

USB Connector – used to connect the cutting plotter to a computer through a USB cable.

Şekil 1-5

2. Installation

2.1 Precaution

Please read the following information carefully before you start installation.

Note:

1.

- Make sure the power switch is off before installing the cutting plotter.
- Carefully handle the cutter to prevent any injuries.

2. **Choosing a proper place before setting up the cutting plotter**

Before installing your cutting plotter, select a suitable location, which meets the following conditions.

- The machine can be approached easily from any direction.
- Keep enough space for the machine, accessories and supplies.
- Keep the working area stable, avoiding sever vibration.
- Keep the temperature between ***15 and 30℃ (60-86°F)*** in the workshop.
- The relative humidity of the working environment should be between **25% to 75%**.
- Protecting the machine from dust and strong air current.
- Preventing the machine from direct sunlight or extremely bright lighting.

3. **Connecting the Power Supply**

Check the plug of the power cord to see if it matches with the wall outlet. If not, please contact your dealer.

- Insert the plug (male) into a grounded power outlet.
- Insert the other end (female) of power cord into the AC connector of cutting plotter.

2.2 Stand & Flexible Media Support System (for VC-1300/1800)

Adım 1

Please examine supplied items in the accessory box of stand carton:

- 2 pieces of base beams
- 2 pieces of side beams
- 1 piece of stand beam
- 20 pieces of M6 screws
- 1 piece of M5 L-shape hexagon screw driver
- 1 piece of Installation Guide for Stand Set

Adım 2

- Remove the plotter body and the accessories from the shipped carton.
- Assemble the base beam to the side beam with 2 screws to form a T-shape stand. (See Şekil 2-1)

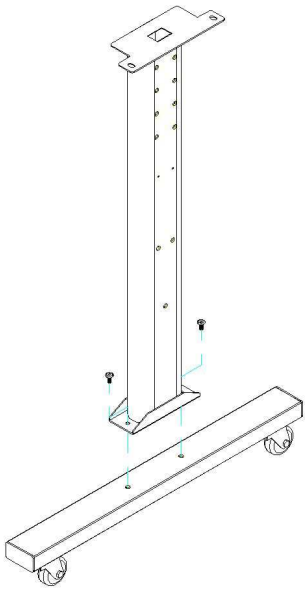

Şekil 2-1

Please pay attention to the direction of the base beam (the wheel on the front end of the beam comes with a break while the rear one is on its own).

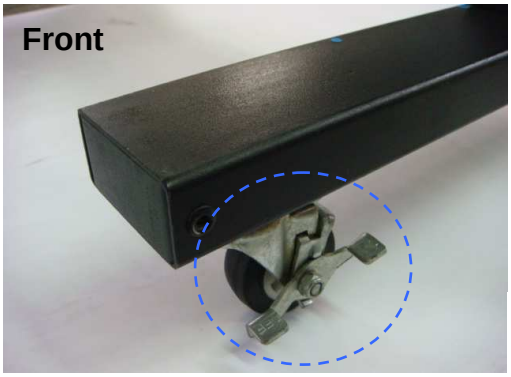

Şekil 2-2

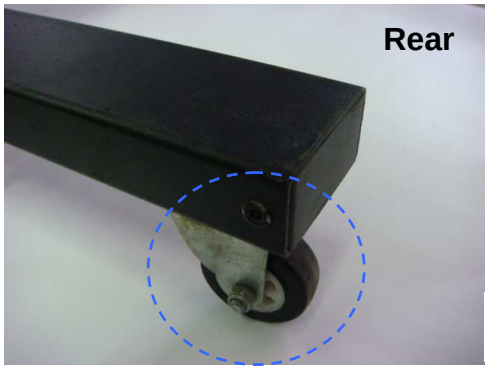

Şekil 2-3

Adım 3

Place the stand beam upright on the T-stand and follow number ❶❷ to assemble.
(See Şekil 2-4 & 2-5)

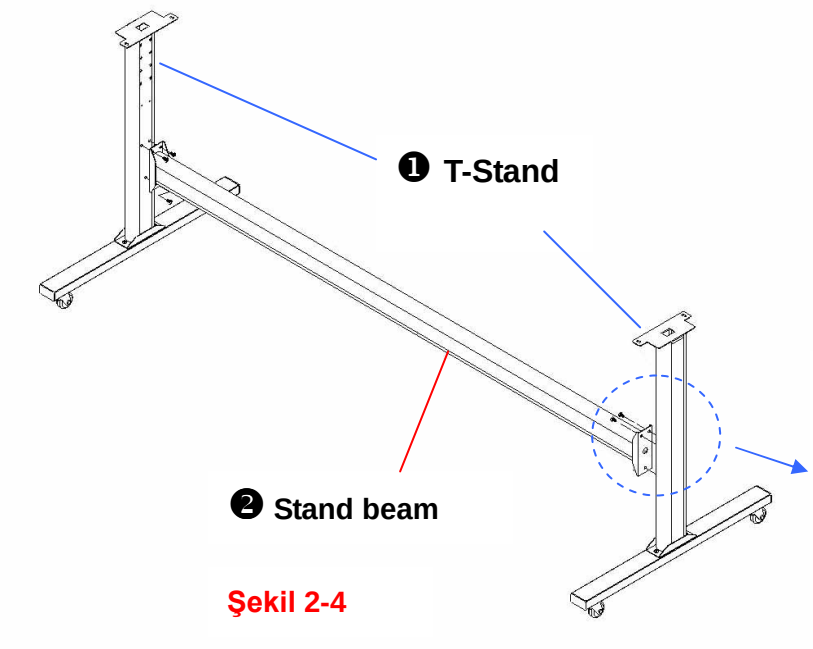

Şekil 2-4

Şekil 2-5

Adım 4

Position the stand beam perpendicularly to part ❶and put the screws into the holes and tighten them as Şekil 2-5. Then the complete picture of stand will be like Şekil 2-4.

Adım 5

Remove the cutting plotter from the carton. Position your stand under the plotter, and then insert the screws into the holes on plotter's bottom and tighten them up as shown in Şekil 2-6.

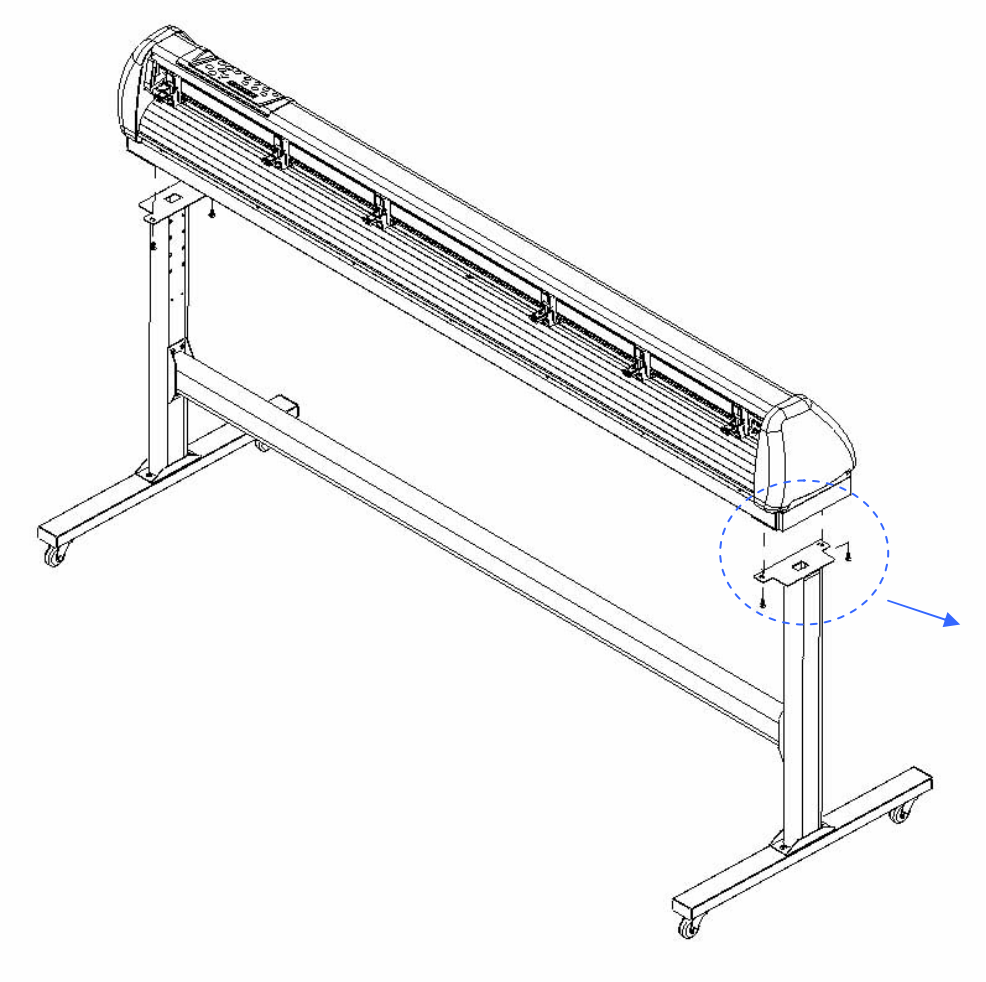

Şekil 2-6

Note: The cutting plotter needs to be assembled by at least two people.

Adım 6

Insert the roll holder support with the screws into the holes of the stand, and then tighten them up as shown in Şekil 2-7. You could decide roll holder support's position by inserting into different holes.

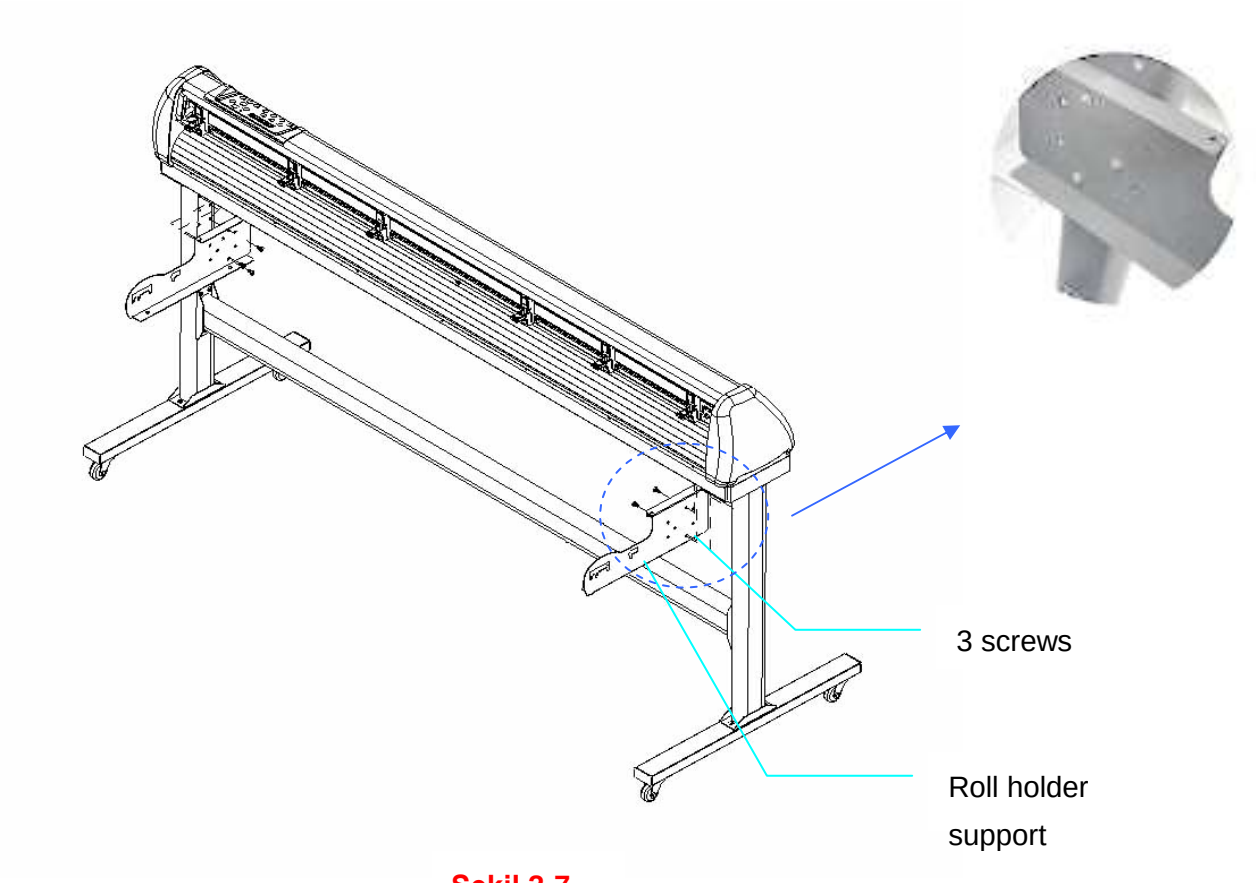

Şekil 2-7

Adım 7

Place two roll holders into the holes in the roll holder support. (Şekil 2-8)

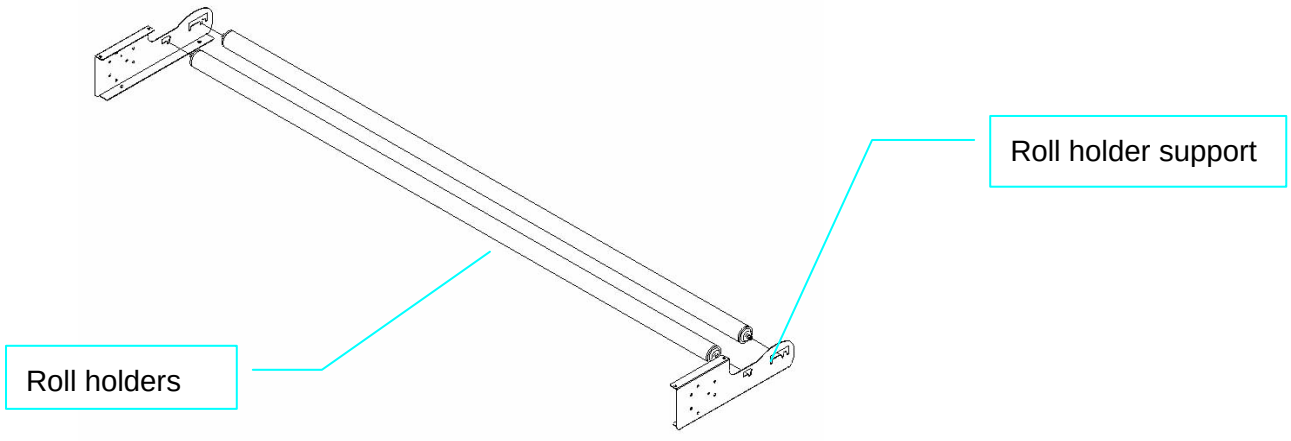

Şekil 2- 8

Adım 8

Lastly, the complete picture will be shown like below. (Şekil 2-9)

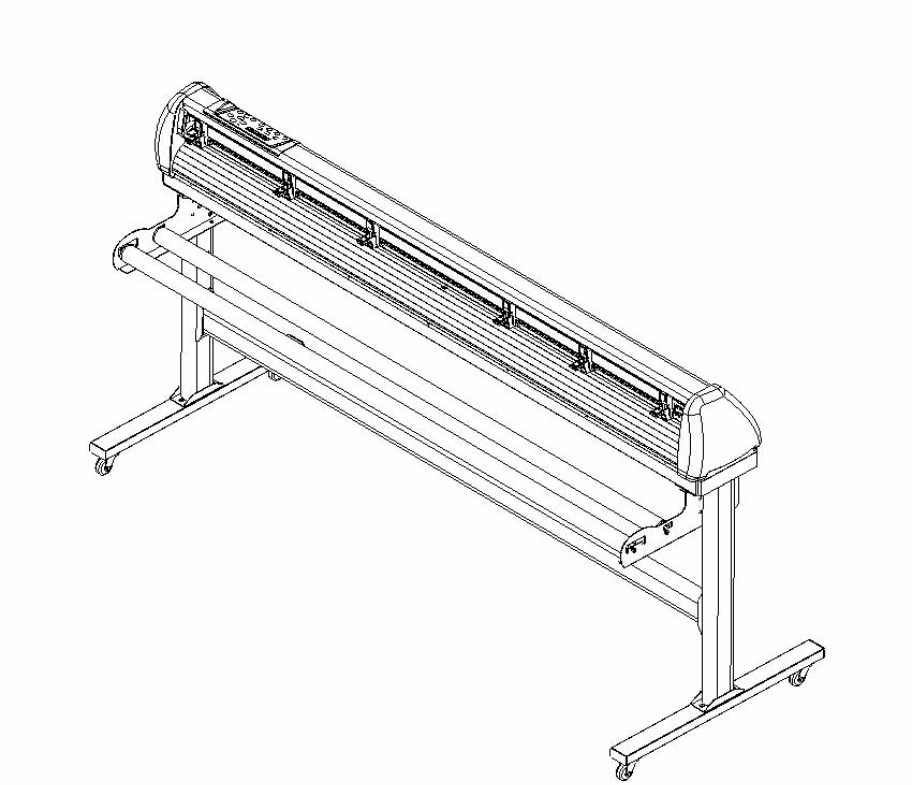

Şekil 2-9

2.3 Desktop Flexible Media Support System (For VC-600 only)

Adım 1

Please examine the following items in stand carton's accessory box:

- 1 set of Roll Media Flange (2 pieces)
- 1 set of Roll Holder (2 pieces)
- 1 set of Roll Holder Guide Bushes (4 pieces)
- 1 set of Roll Holder Support (2 pieces)
- 1 set of Desktop Support Bracket (2 pieces)
- 4 pieces of Plastic Foot
- 4 pieces of M4 screws
- 12 pieces of M6 screws
- 1 piece of M4 L-shape hexagon screw driver
- 1 piece of M5 L-shape hexagon screw driver
- 1 piece of M6 L-shape hexagon screw driver (for adjusting the screws of Roll Holders)
- 1 piece of Installation Guide for Roll Holder

Adım 2

Put the 4 Plastic Foot under the Roll Holder Support and insert the M4 screw into the hole of Plastic Foot and tighten them with the M4 L-shape screw driver. (Şekil 2-7)

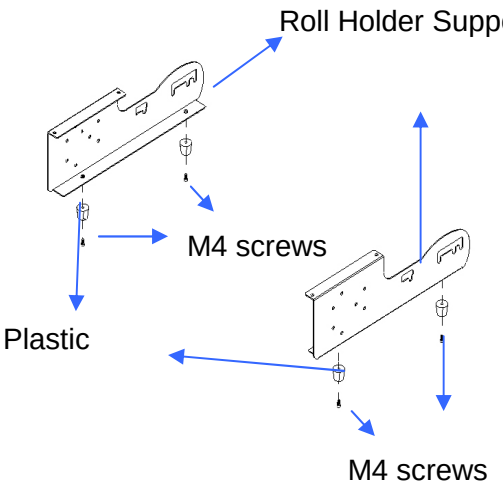

Şekil 2 -7

Şekil 2-8

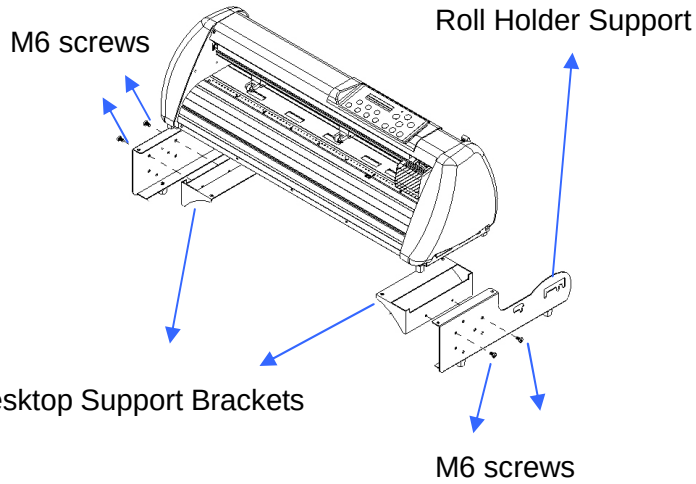

Adım 3 Position the Desktop Support Brackets beside the Roll Holder Support and insert M6 screws into the Roll Holder Support and tighten them with M6 L-shape screw driver. (Refer to Şekil 2-9 at the left).

Adım 4

Put the bottom of machine in lateral, and position the Roll Holder Assembly beside the bottom of the machine. Then, insert the M6 screws into the holes of Roll Holder support assembly and tighten them with M6 L-shape screwdriver. Like Şekil 2-10.

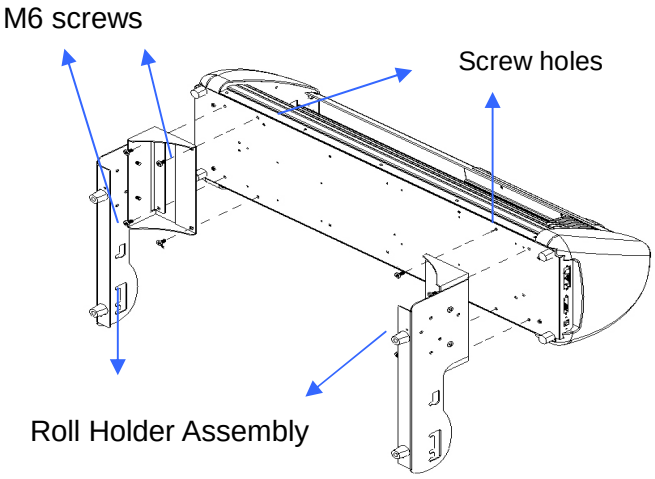

Şekil 2-9

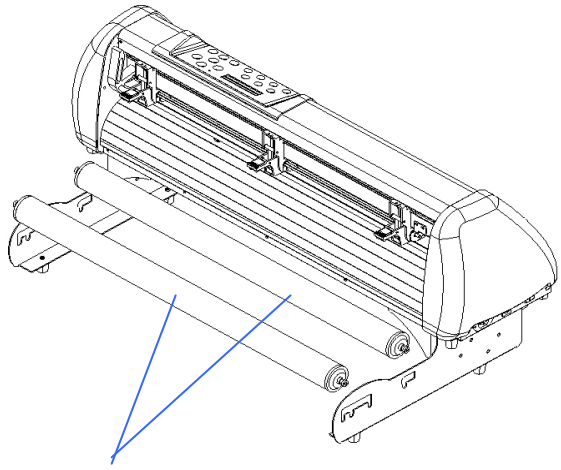

Şekil 2-10

Adım 5

Place the two roll holders into the holes of Roll Holder Support (Şekil 2-10).

Adım 6

The complete Desktop Media Support System will be shown as in Şekil 2-11.

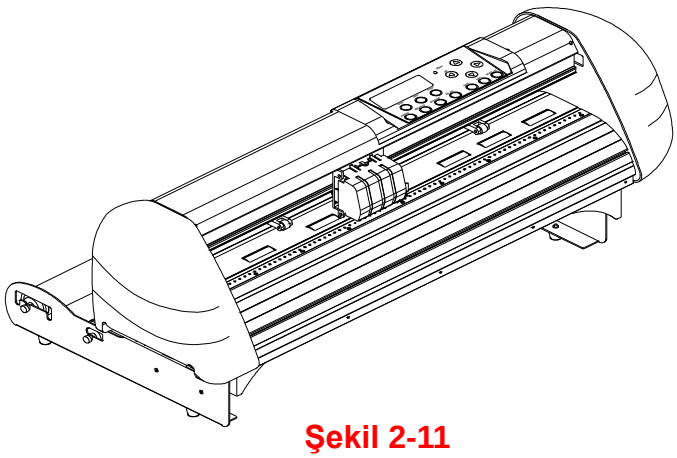

Şekil 2-11

2.4 Installation of Media Basket System

Adım 1

Please examine the supplied items in the accessory box

- 2 pieces of basket arms
- 2 pieces of basket rods
- 1 piece of basket
- 2 pieces of fixtures (for basket arms)
- 8 pieces of M3 screws
- 1 piece of 2mm L-shape hexagon screw driver

Adım 2

First, place the basket arms beside the stand and fix them with fixtures. Then insert the M3 screws and tighten them with the 2mm L-shape screw driver. (See Şekil 12)

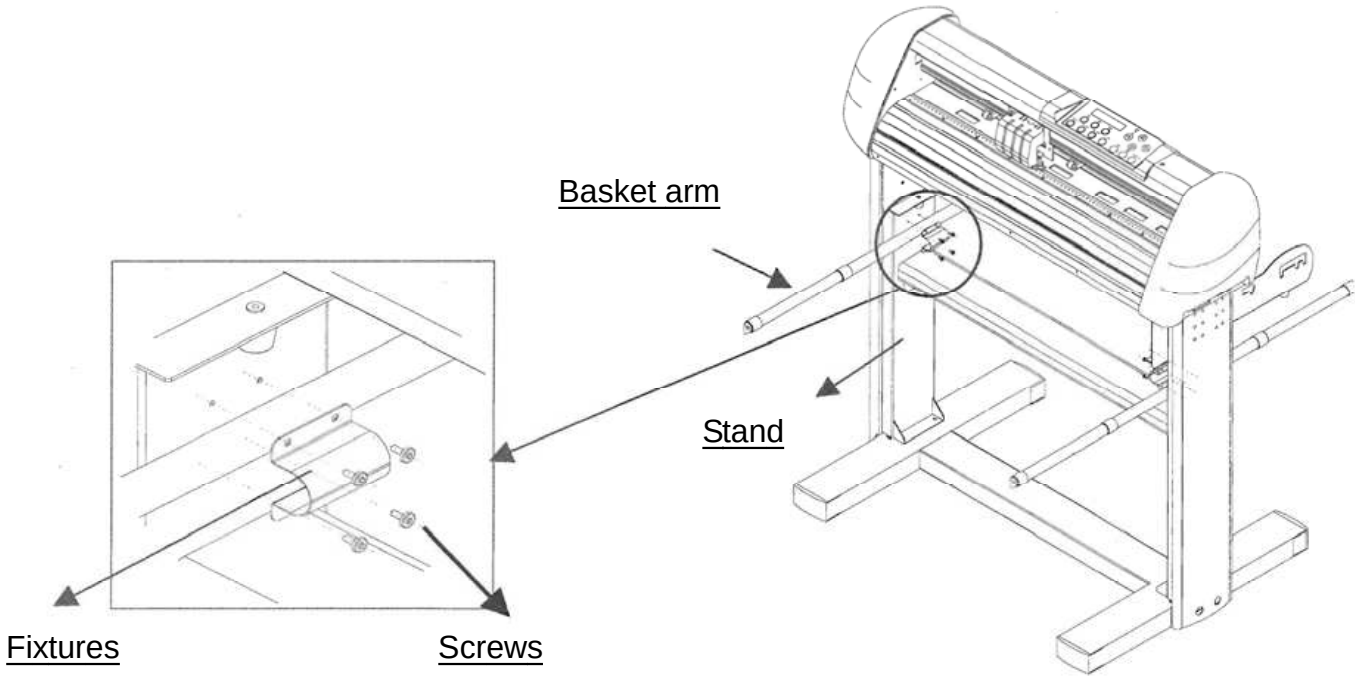

Şekil 2-12

Adım 3

Insert the basket rods to the basket holes (See Şekil 13)

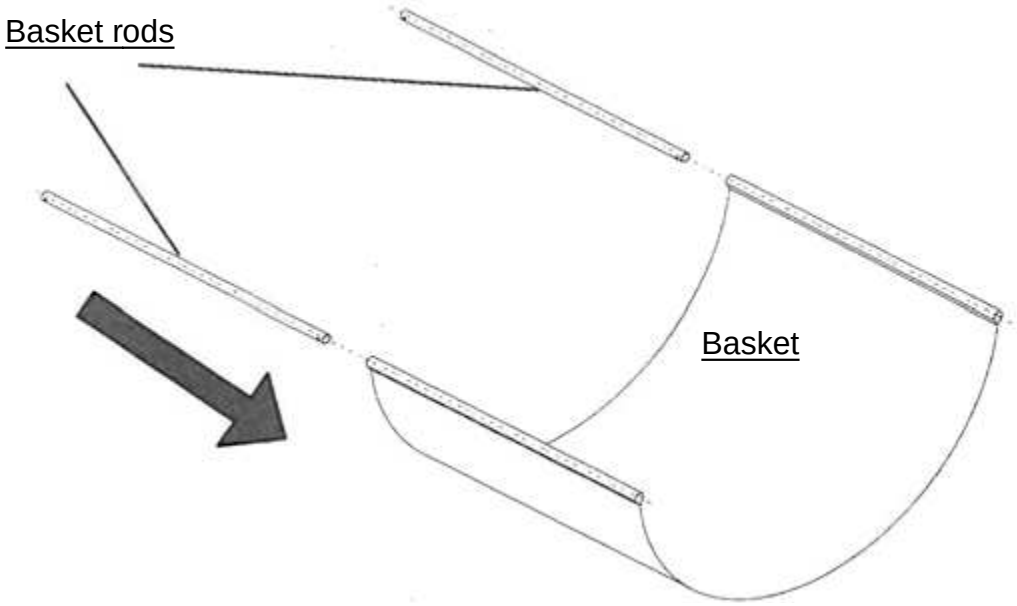

Şekil 2-13

Adım 4

Loosen the basket screws from the basket arms. Position the basket rod in front of the basket arms and insert the basket screws into the holes on the basket rod and tighten them. (Şekil 14)

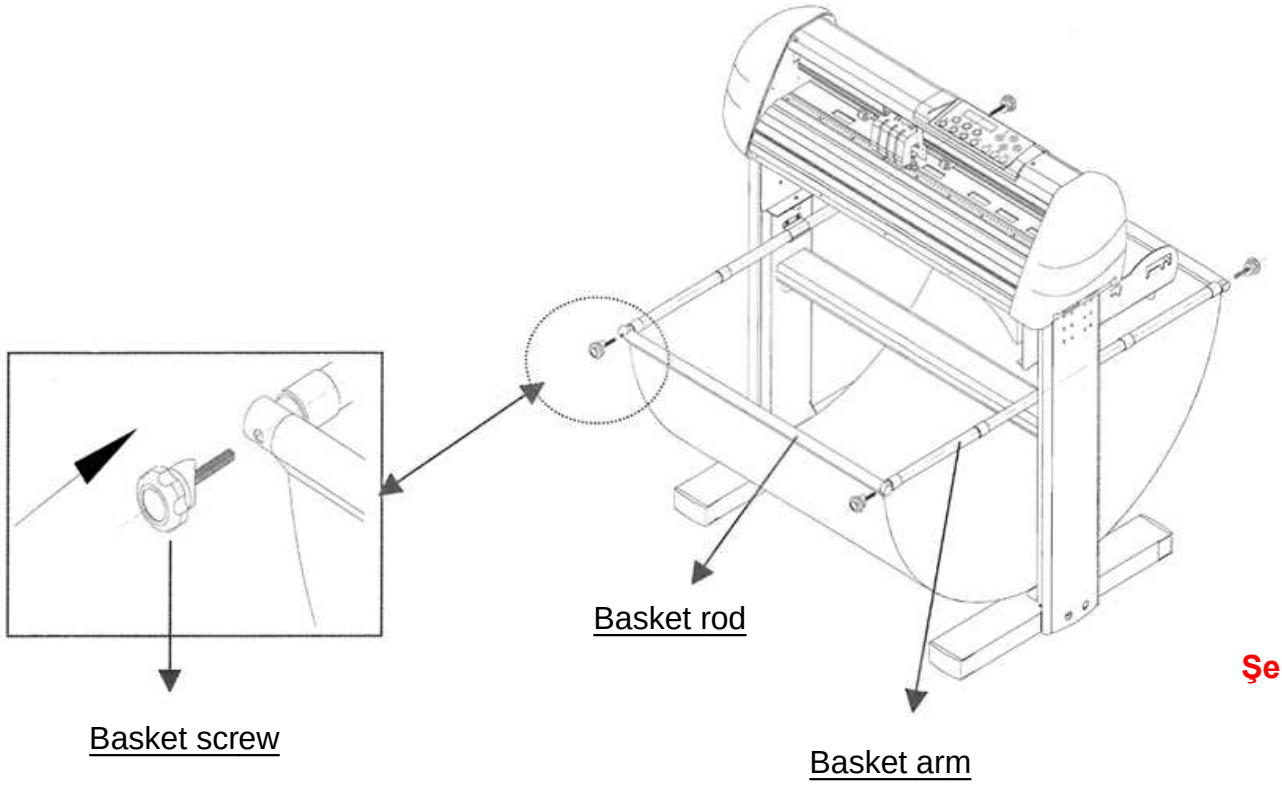

Şekil 2-14

Adım 5

The complete Media Basket System will be like Şekil 2-15.

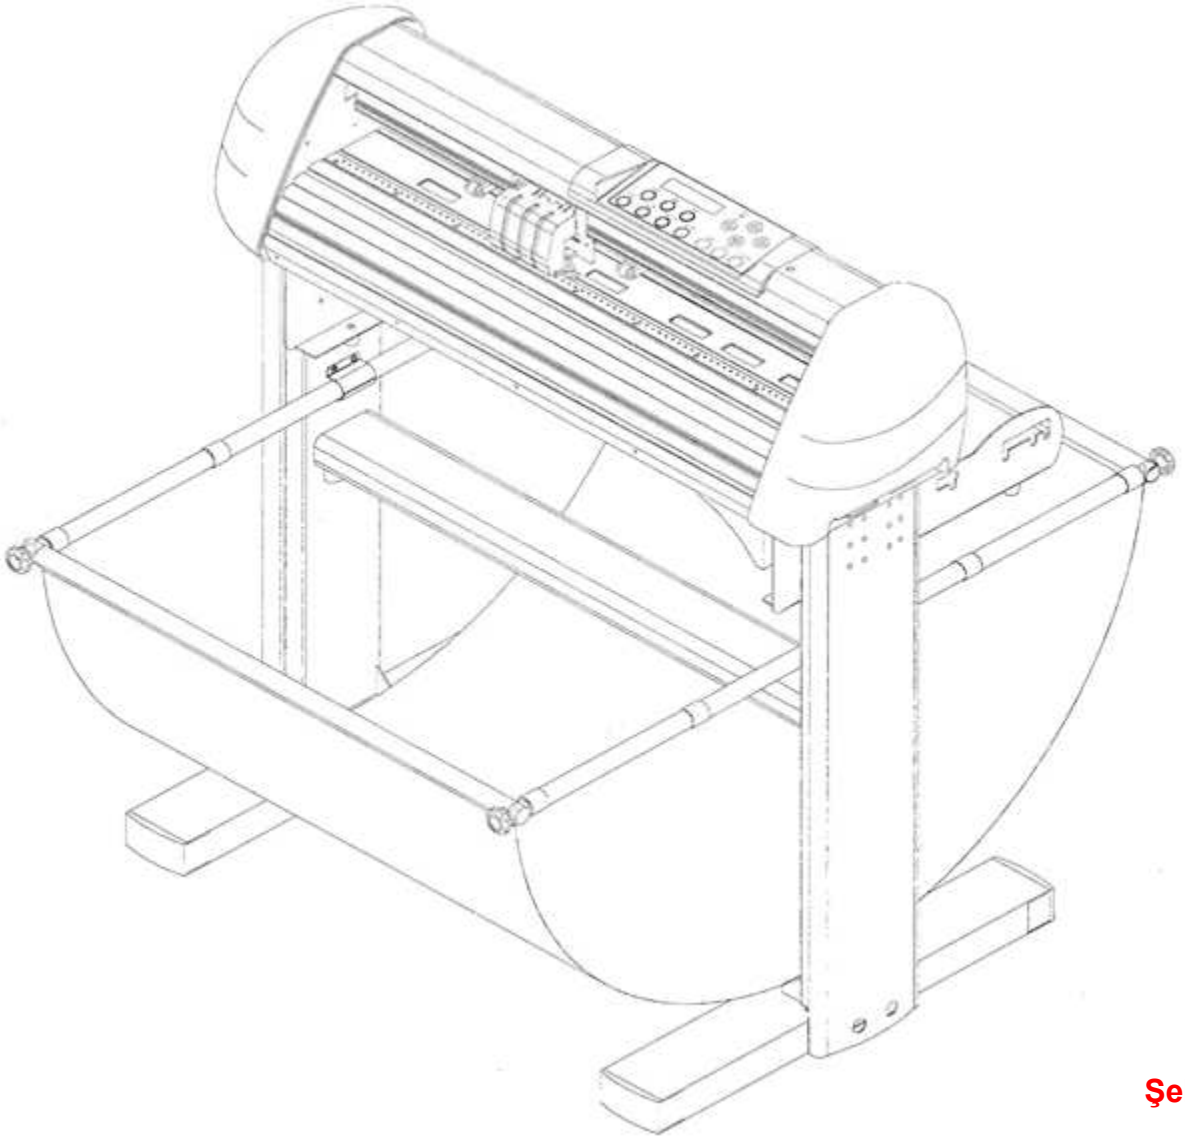

Şekil 2-15

2.5 Cutting Pad Installation

1 piece of cutting pad is included in the accessory pack. Follow the instruction below to install a new cutting pad when the existing pad is worn out.

Adım 1

Carefully remove the cutting pad from the unit.

Şekil 2-16

Adım 2

Remove the remaining adhesive on the groove with alcohol or cleaning naphtha.

Remaining adhesive

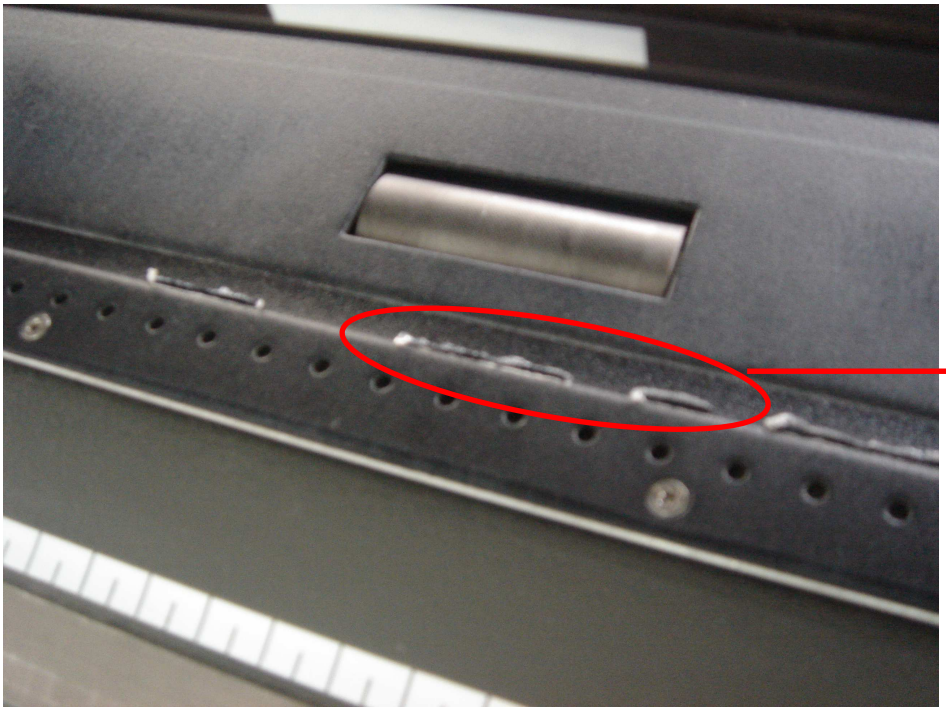

Şekil 2-17

Adım 3

Attach the new cutting pad to the groove after unrolling it and removing the backing sheet and the installation process is completed.

Şekil 2-18

Şekil 2-19

2.6 Blade Installation

Şekil 2-20 is the illustrator of the blade holder. Insert a blade into the bottom of the blade holder and remove the blade by pushing the pin. Make sure that your fingers are away from the blade tip.

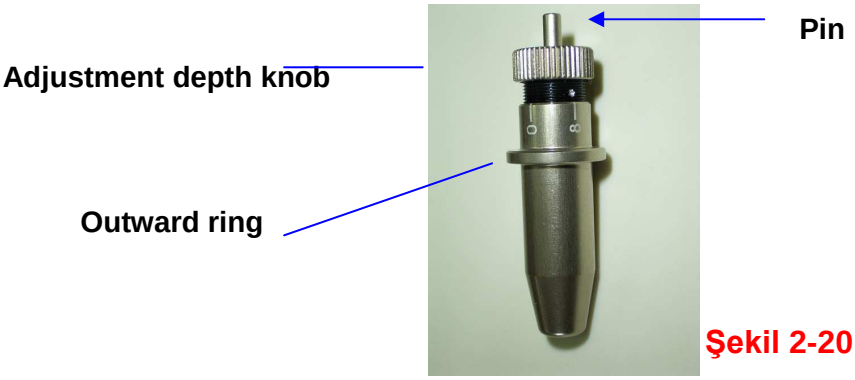

Şekil 2-20

Adım 1

Install blade (Şekil 2-21).

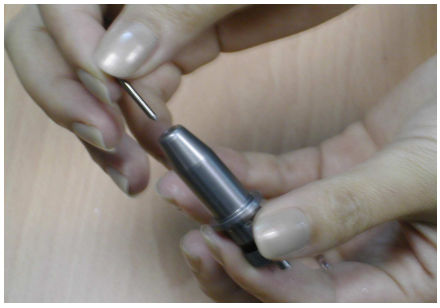

Şekil 2-21

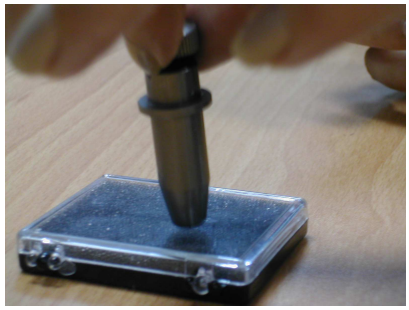

Şekil 2-22

Adım 2

Push the blade to the bottom of the blade holder. (Şekil 2-22).

Adım 3

Adjust the blade tip to suitable length by screwing
"Blade tip adjustment screw" clockwise orcount-clockwise. (Şekil 2-23).

Tips:

"The proper length" means the blade's length is adjusted 0.1mm more than film's thickness. That is, if the thickness of film is 0.5mm, then blade's length is properly adjusted 0.6mm and it can completely cut through the film layer yet avoid penetrating the backing.

Şekil 2-23

Adım 4

Insert the blade holder into tool carriage. Please note the outward ring of the holder must put into the grooves of carriage firmly (see Şekil 2-24), then fasten the case (Şekil 25).

Şekil 2-24

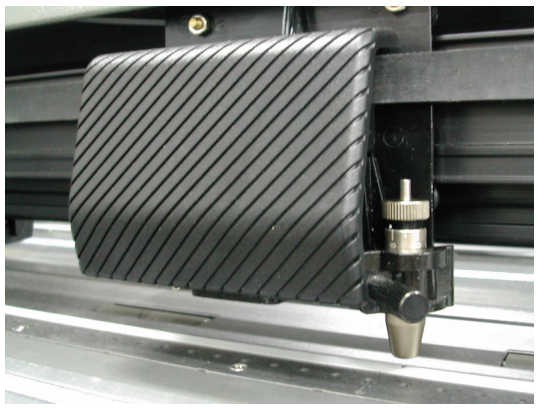

Şekil 2-25

Adım 5 Use the reversing steps to remove the blade holder.

Adım 6 **Eject the blade. Push "Blade eject pin" to eject blade** when the blade needs to be replaced.

Note:
The blade will lose its sharpness after a period of usage, the cutting quality might be affected. By increasing the cutting force, it might do the trick. However, once the blade is worn out and no longer provides a reliable cutting, you should replace a new one. The blade is consumable and must be replaced as often as necessary to maintain the cutting quality. The quality of the blade deeply affects cutting quality. So be sure to use a high quality blade to ensure good cutting results.

2.7 Automatic Blade Length Detection

Şekil 2.-26 is the new blade holder with a scale and the carriage with a mark. This blade holder detects blade length automatically and shows how the knob needs to be turned on the LCM.

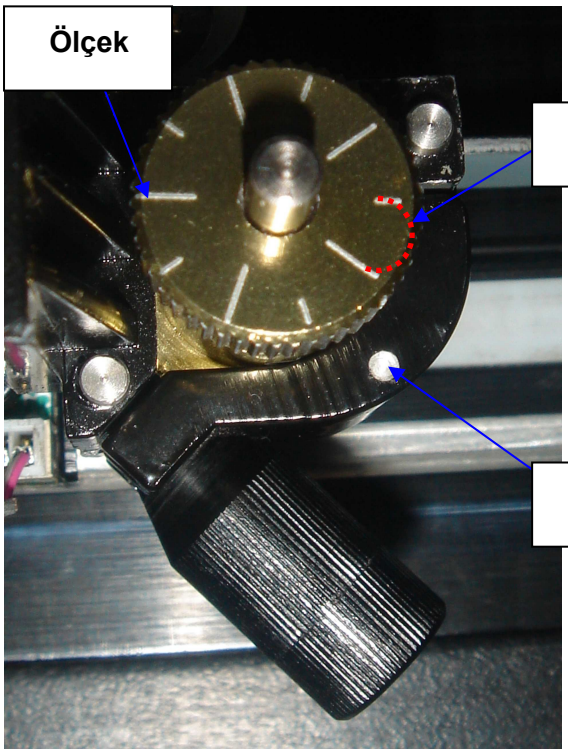

Şekil 2-26

Şekil 2-27

There are 10 units on the scale; each unit equals to 0.05 mm, allowing you to adjust the blade length for 0.00mm-5.00mm (Şekil 2-26).

Follow the steps below to adjust the length of the blade:

1. Keep the blade tip within the blade holder before you start adjusting.
2. Align one of the scales on the blade holder to the mark on the carriage
3. Select “Blade Length Adjust” under “CUT TEST” on the LCM, enter the blade length wished in “Set Length”; test the blade holder first and then test the blade length by pressing ENTER.

Note:
Keep the blade holder at the same position when you perform blade holder and blade length tests.

4. When blade holder and blade length tests are finished, the screen will show you to what degree (the unit of the value following “CW” or “CCW” is “circle”) and in which direction [CW (clockwise) or CCW (counterclockwise)] you should turn the adjustment knob.
   EG, Turn CW 5 is telling you that you should turn the knob for 5 units clock-wisely (Şekil 2-28, Şekil 2-29).

5. The screen will show "Adjustment completes" when the value on the screen is 0, the blade length is perfect and no more adjustment needs to be made. Press "Enter" now to complete the process and you may start cutting at this point.

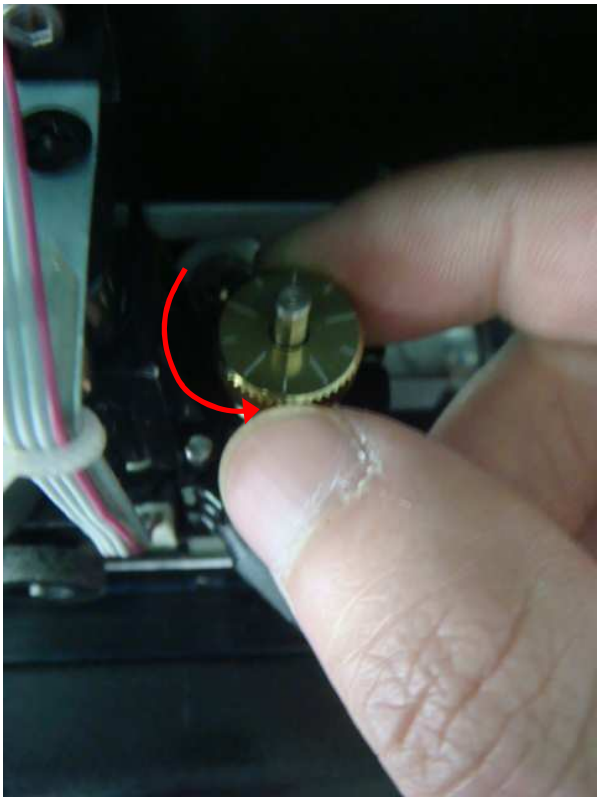

Şekil 2-29

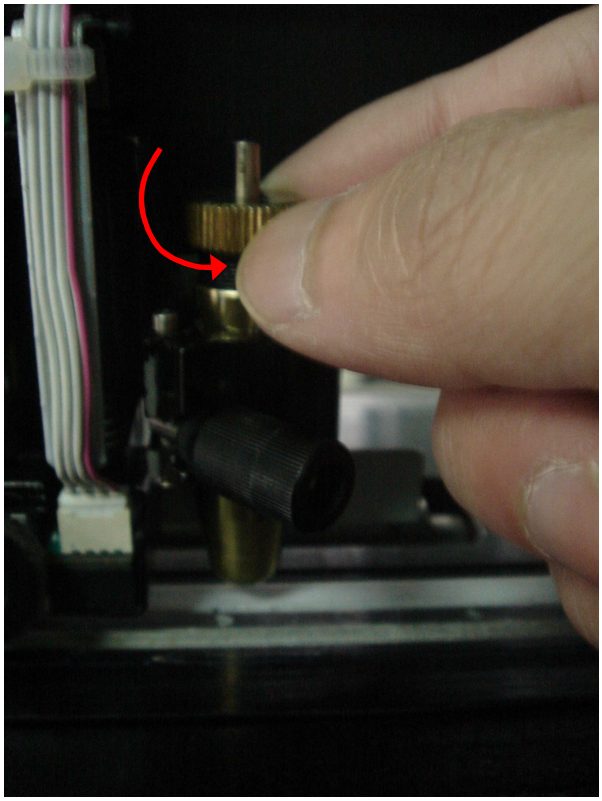

Şekil 2-30

2.8 Cable Connection

The cutting plotter communicates with a computer through a **USB (Universal Serial Bus), Parallel port (Centronics), or** a **Serial port (RS-232C)**. This chapter shows you how to connect the cutting plotter to a host computer and how to set up the computer/cutting plotter interconnection.

Note:
When USB connection is enabled, both parallel port and serial port will be disabled automatically.

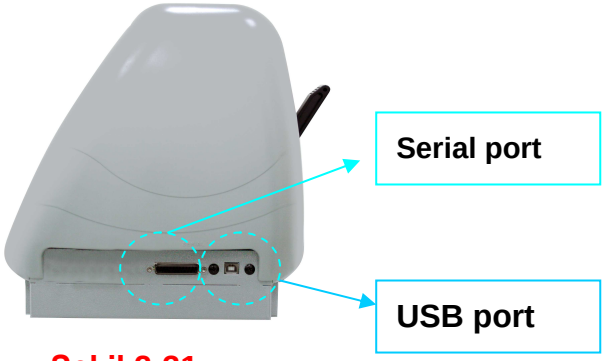

Şekil 2-31

2.8.1 USB Interface

ValueCut build-in USB interface are based on the Universal Serial Bus Specifications Revision 1.1. (Operation system of Windows 95, Windows NT don't support USB).

- USB driver installation

Note:
If you are using Windows 2000 / XP / Vista / 7 as your operating system, make sure you log in using the "Administrator" account.

Use the USB One-click Installation for quick driver installation. Follow the simple steps below for driver setup.

Adım 1:

Connecting your Mutoh cutter

1. Turn on the machine.
2. Connect the USB connector to the machine and then USB driver will installed automatically. It will take a few minutes to find the device. Please DO NOT disconnect the USB cable until the installation has completed.
3. You can double click the USB icon on the taskbar to make sure the USB device is detected.

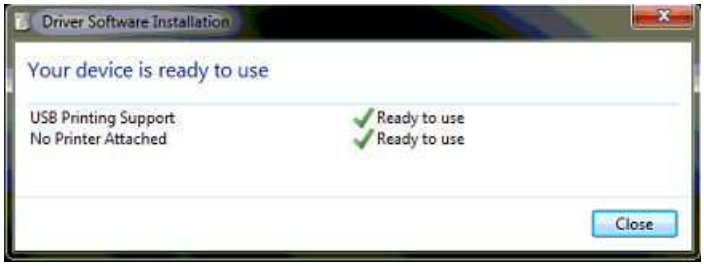

Adım 2: Installing the software

(1) Put the installation CD into your CD-ROM. **Please make sure that the USB device is connected before you start the driver installation.**

(2) Choose either the 32 bit or 64 bit driver installation depending on the operating system installed on your computer to start the installation.

MUTOH
Win 7 / Vista / XP (32-bit Driver) for USB
Win 7 / Vista / XP (32-bit Driver) for COM
Win 7 / Vista (64-bit Driver) for USB
Win 7 / Vista (64-bit Driver) for COM
User Manual
DesignSource Clipart
AAS Installer
Printer Test Sample
Install Acrobat 10.1.4
Install FlexiSTARTER for ValueCut 10.5
Exit

(3) Click “Next” to start the driver installation.

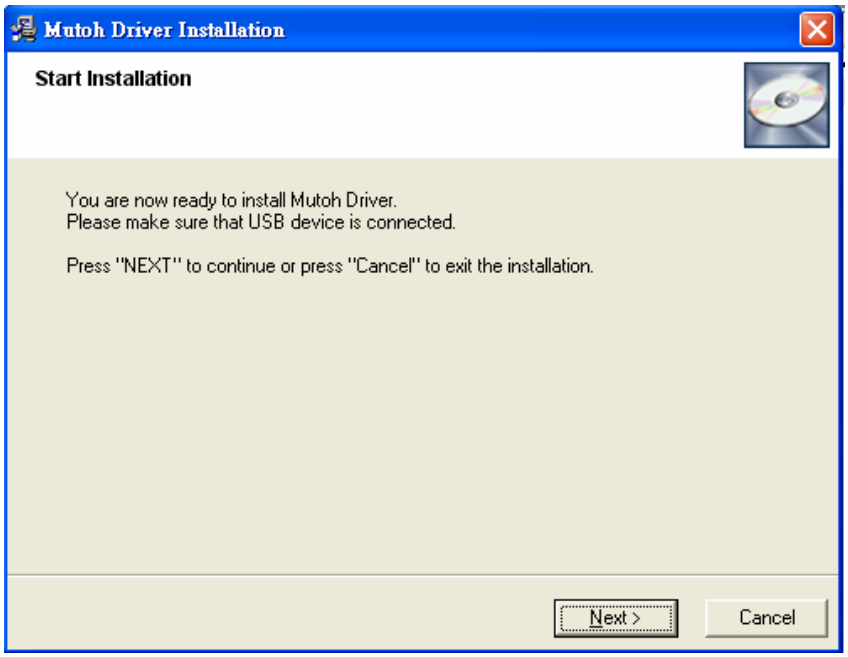
Mutoh Driver Installation
Start Installation
You are now ready to install Mutoh Driver.
Please make sure that USB device is connected.
Press "NEXT" to continue or press "Cancel" to exit the installation.
Next >
Cancel

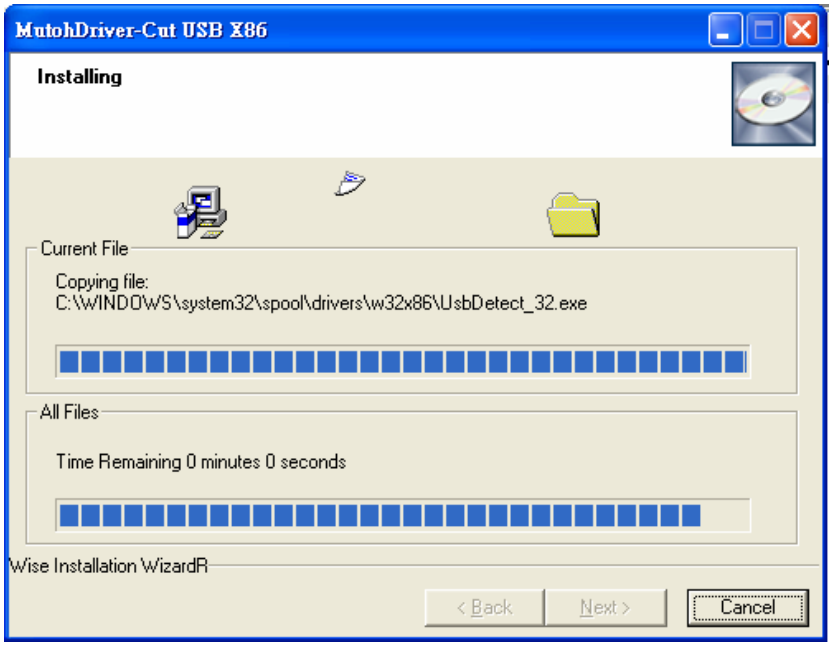

(4) The installation will take a few minutes to complete and you will see a message below and click on “OK” upon completion. Enjoy your Mutoh cutter!

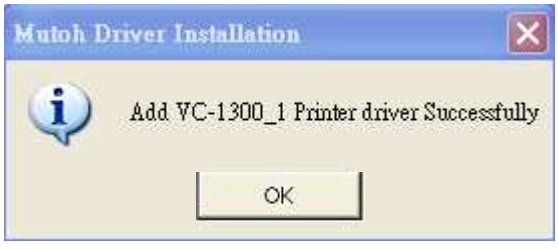

Note:

(1) If the driver is being installed for a second time, the user will be prompted as to whether a second copy of the driver installation is required.

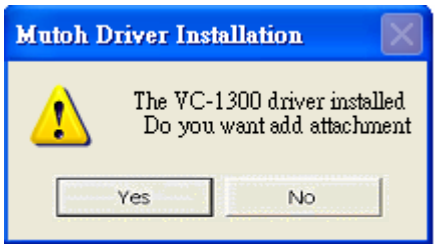

2.8.3 Driver Un-installation

You have to remove previous version driver installed on your PC system completely before you can install the latest version successfully. Please refer to below steps.

1. Right click on the printer to remove the printer from system Printer page.

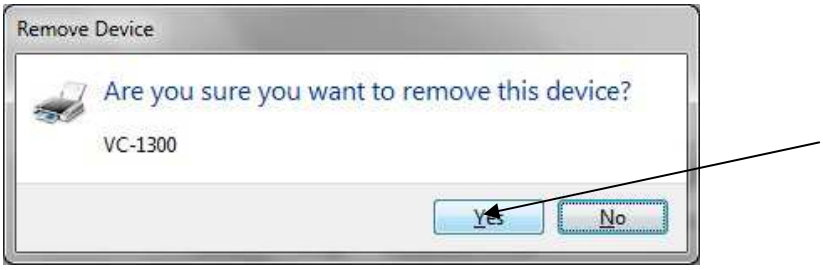

2. After remove from the ValueCut unit, right click on any empty space on the page and select “Server Property”

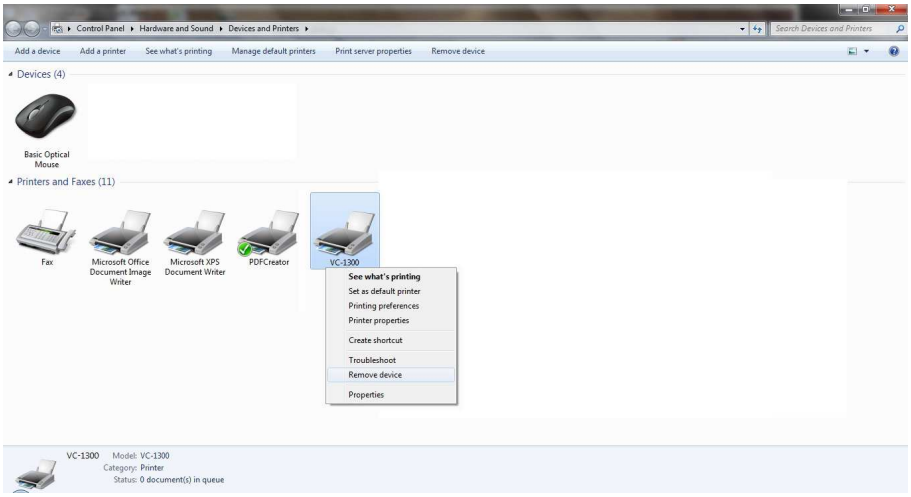

3. The Control Panel

This chapter describes the button operations with the LCM menu flowcharts of ValueCut. When the cutting plotter is ready for use as described in Chapter 1 & 2, all functions are under default parameters.

3.1 The LCD Panel

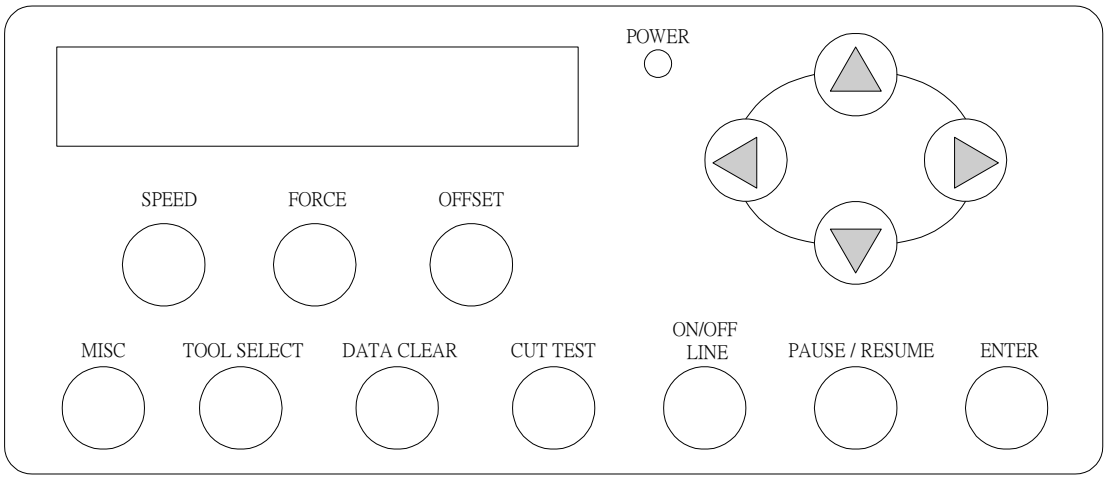

< LCD Control Panel on ValueCut series >

Key	Function
LCD Screen	To display functions and error messages.
Power LED	To indicate the power status (light up: power on; light off: power off)
4 Arrow Keys	To move position, select function, or change setting.
ENTER	To set item or register the immediately preceding input value.
PAUSE/RESUME	To temporarily halt cutting process or to continue
ON/OFF LINE	To switch modes, stop cutting job, or abort changes of settings.
OFFSET	To adjust the value of blade's offset.
FORCE	To adjust the value of cutting force.
SPEED	To adjust the value of cutting speed and quality.
CUT TEST	To perform cutting tests in different ways.
DATA CLEAR	To clear up buffer memory.
TOOL SELECT	To select tools.
MISC	To set up functions.

Please see details in "3.4 Menu Items"

3.2 Menu in On-line Mode

Power On ValueCut in processing

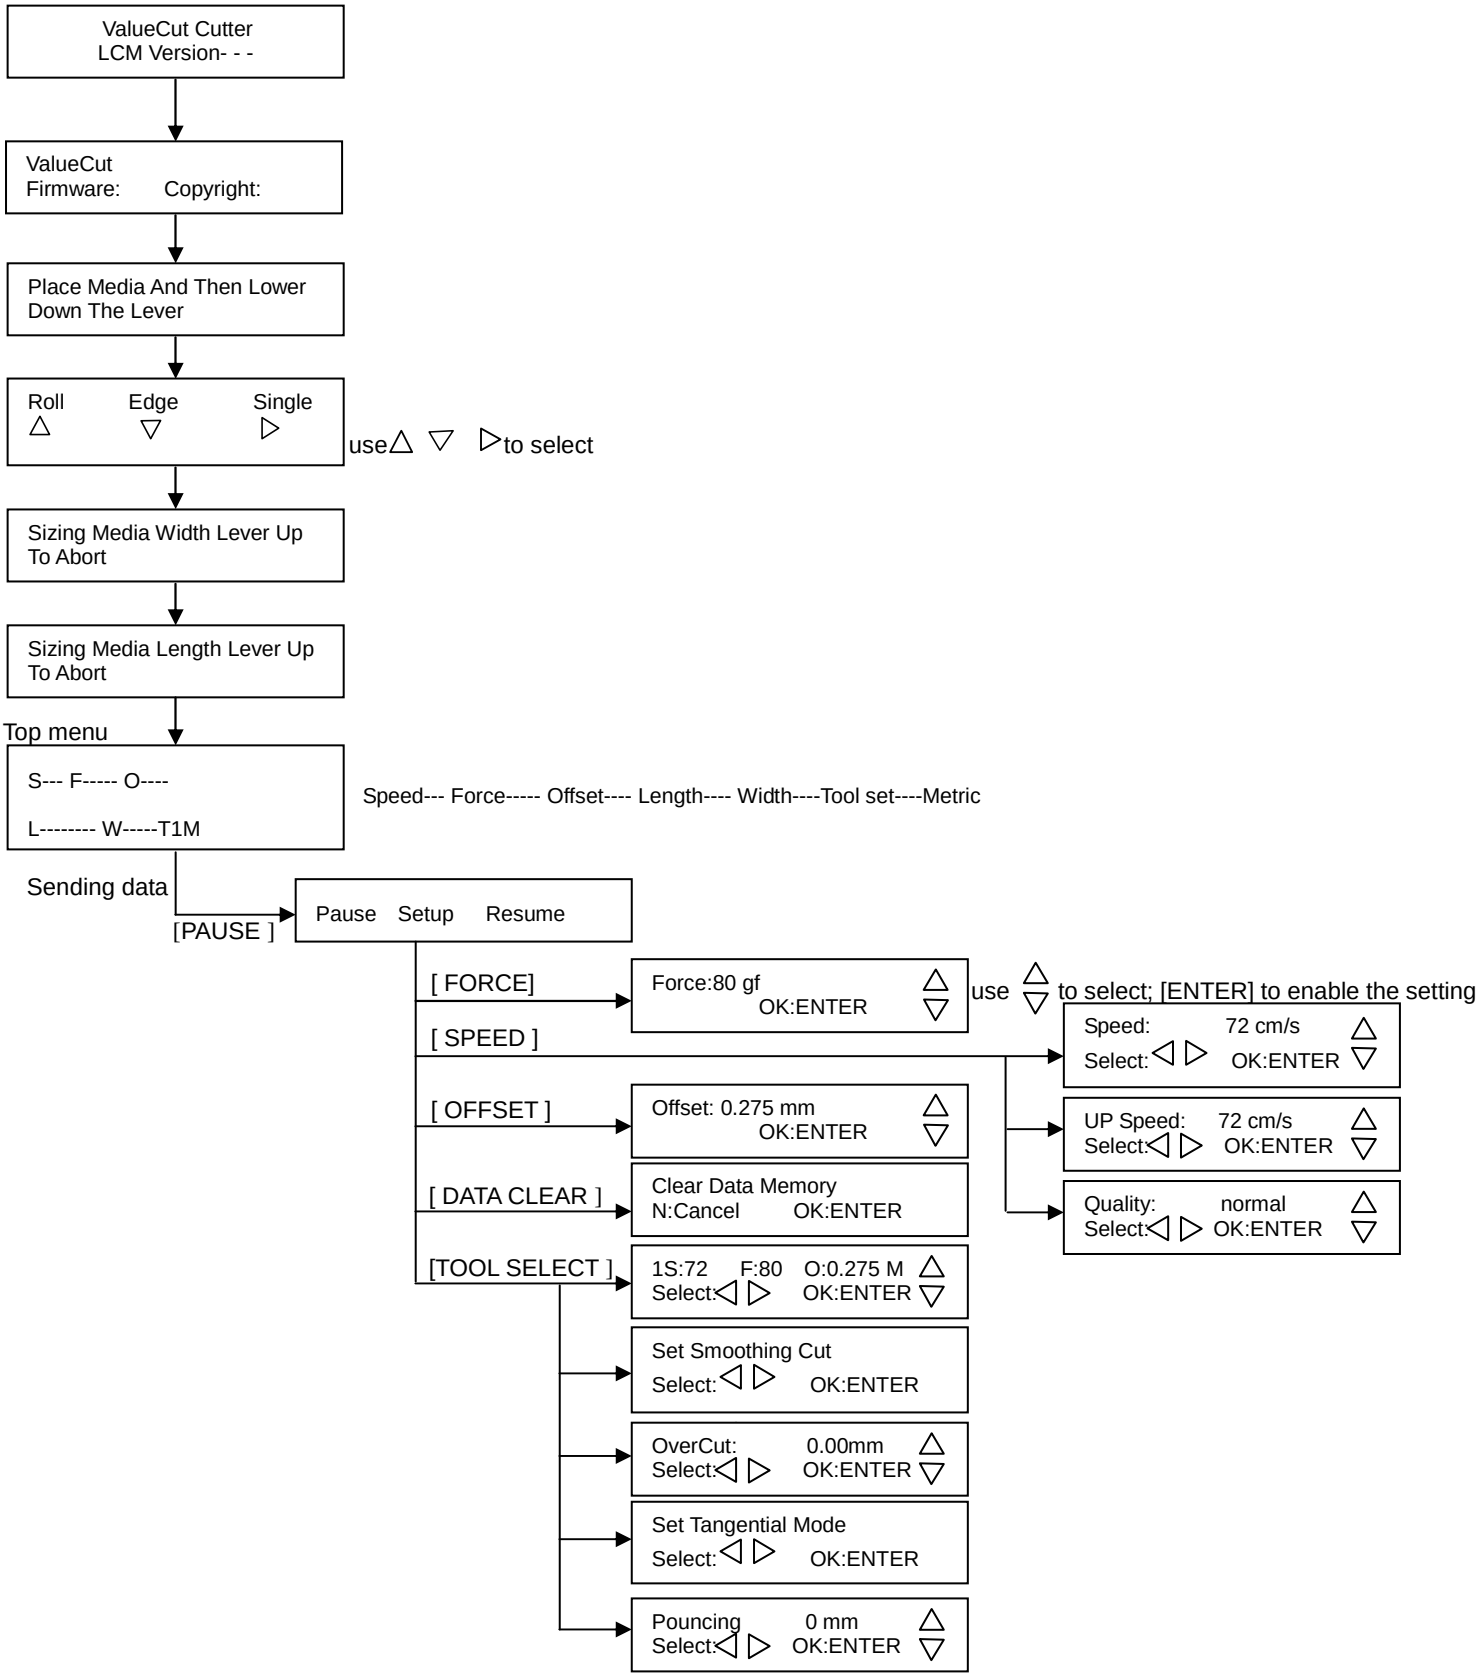

3.3 Menu in Off-line Mode

Press [ON/OFF LINE] to switch to the offline mode

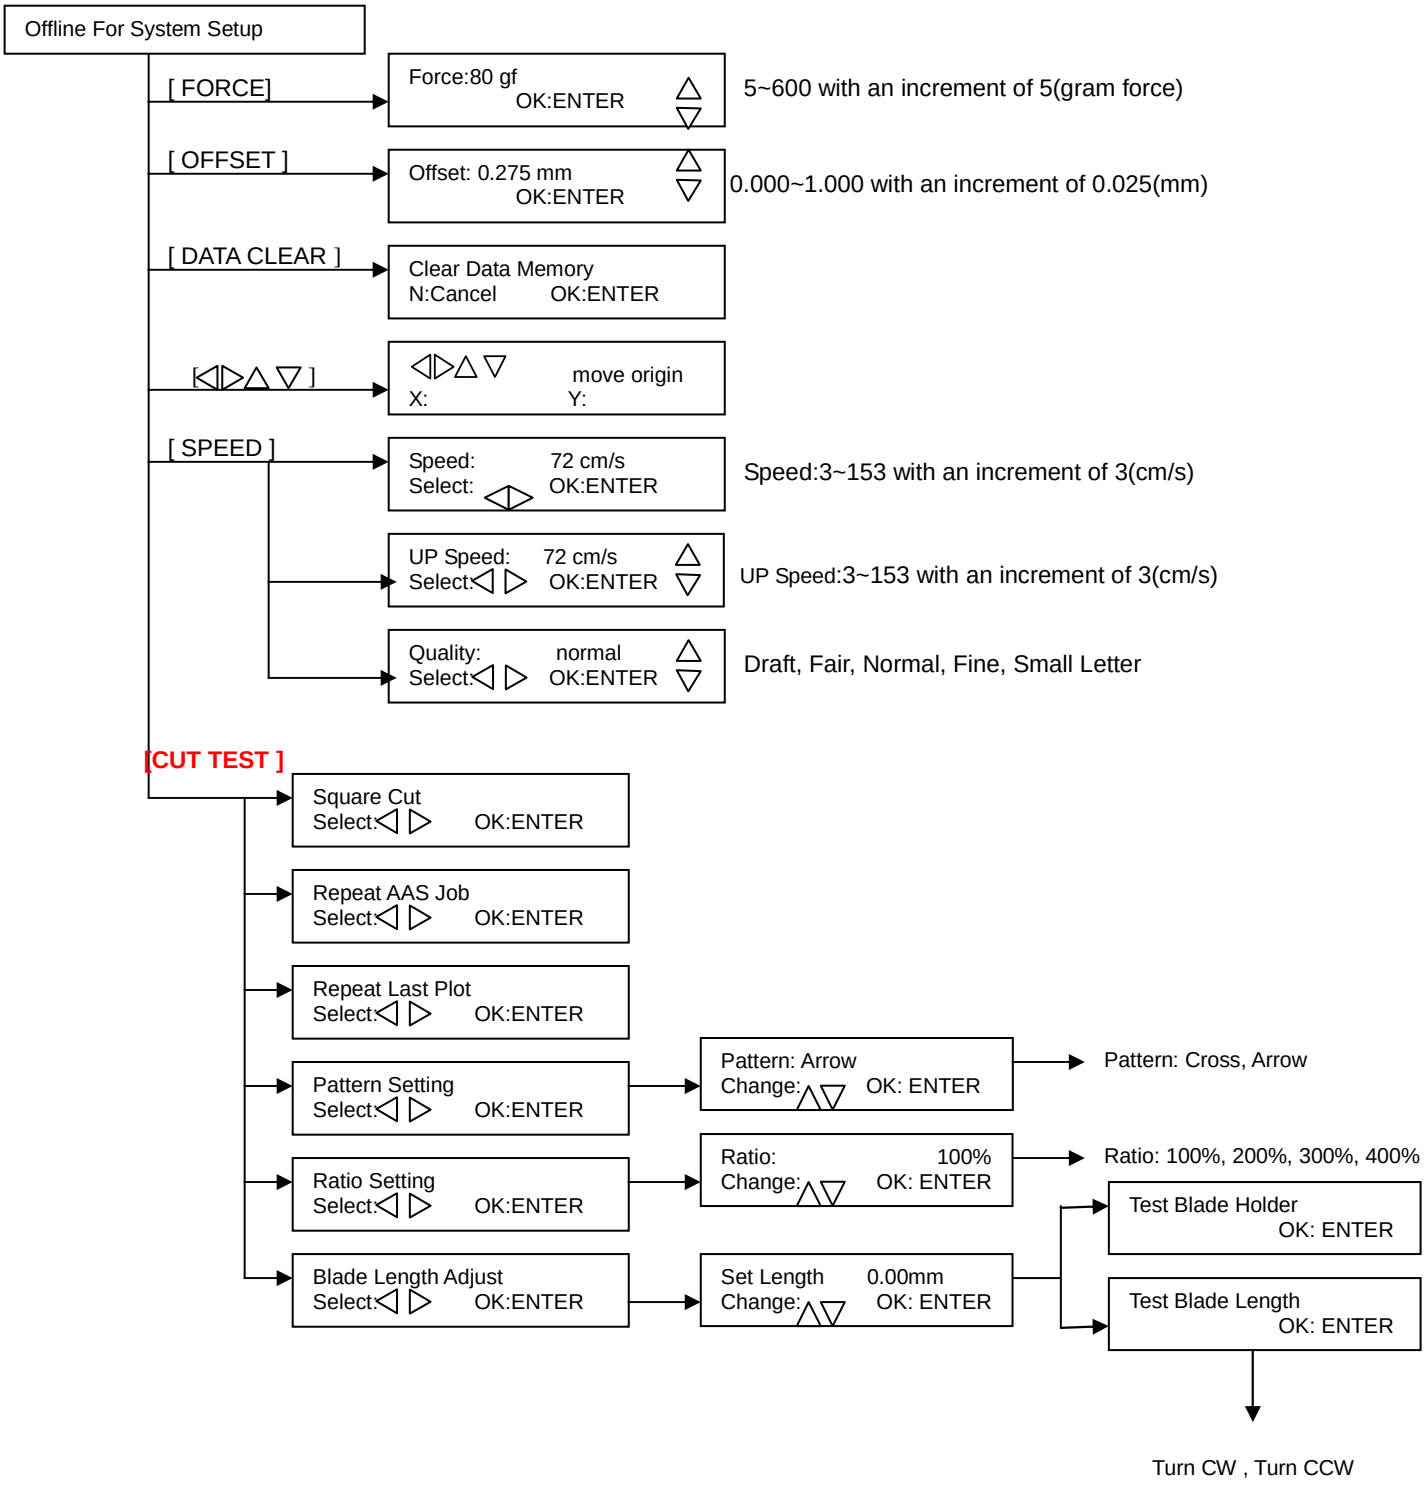

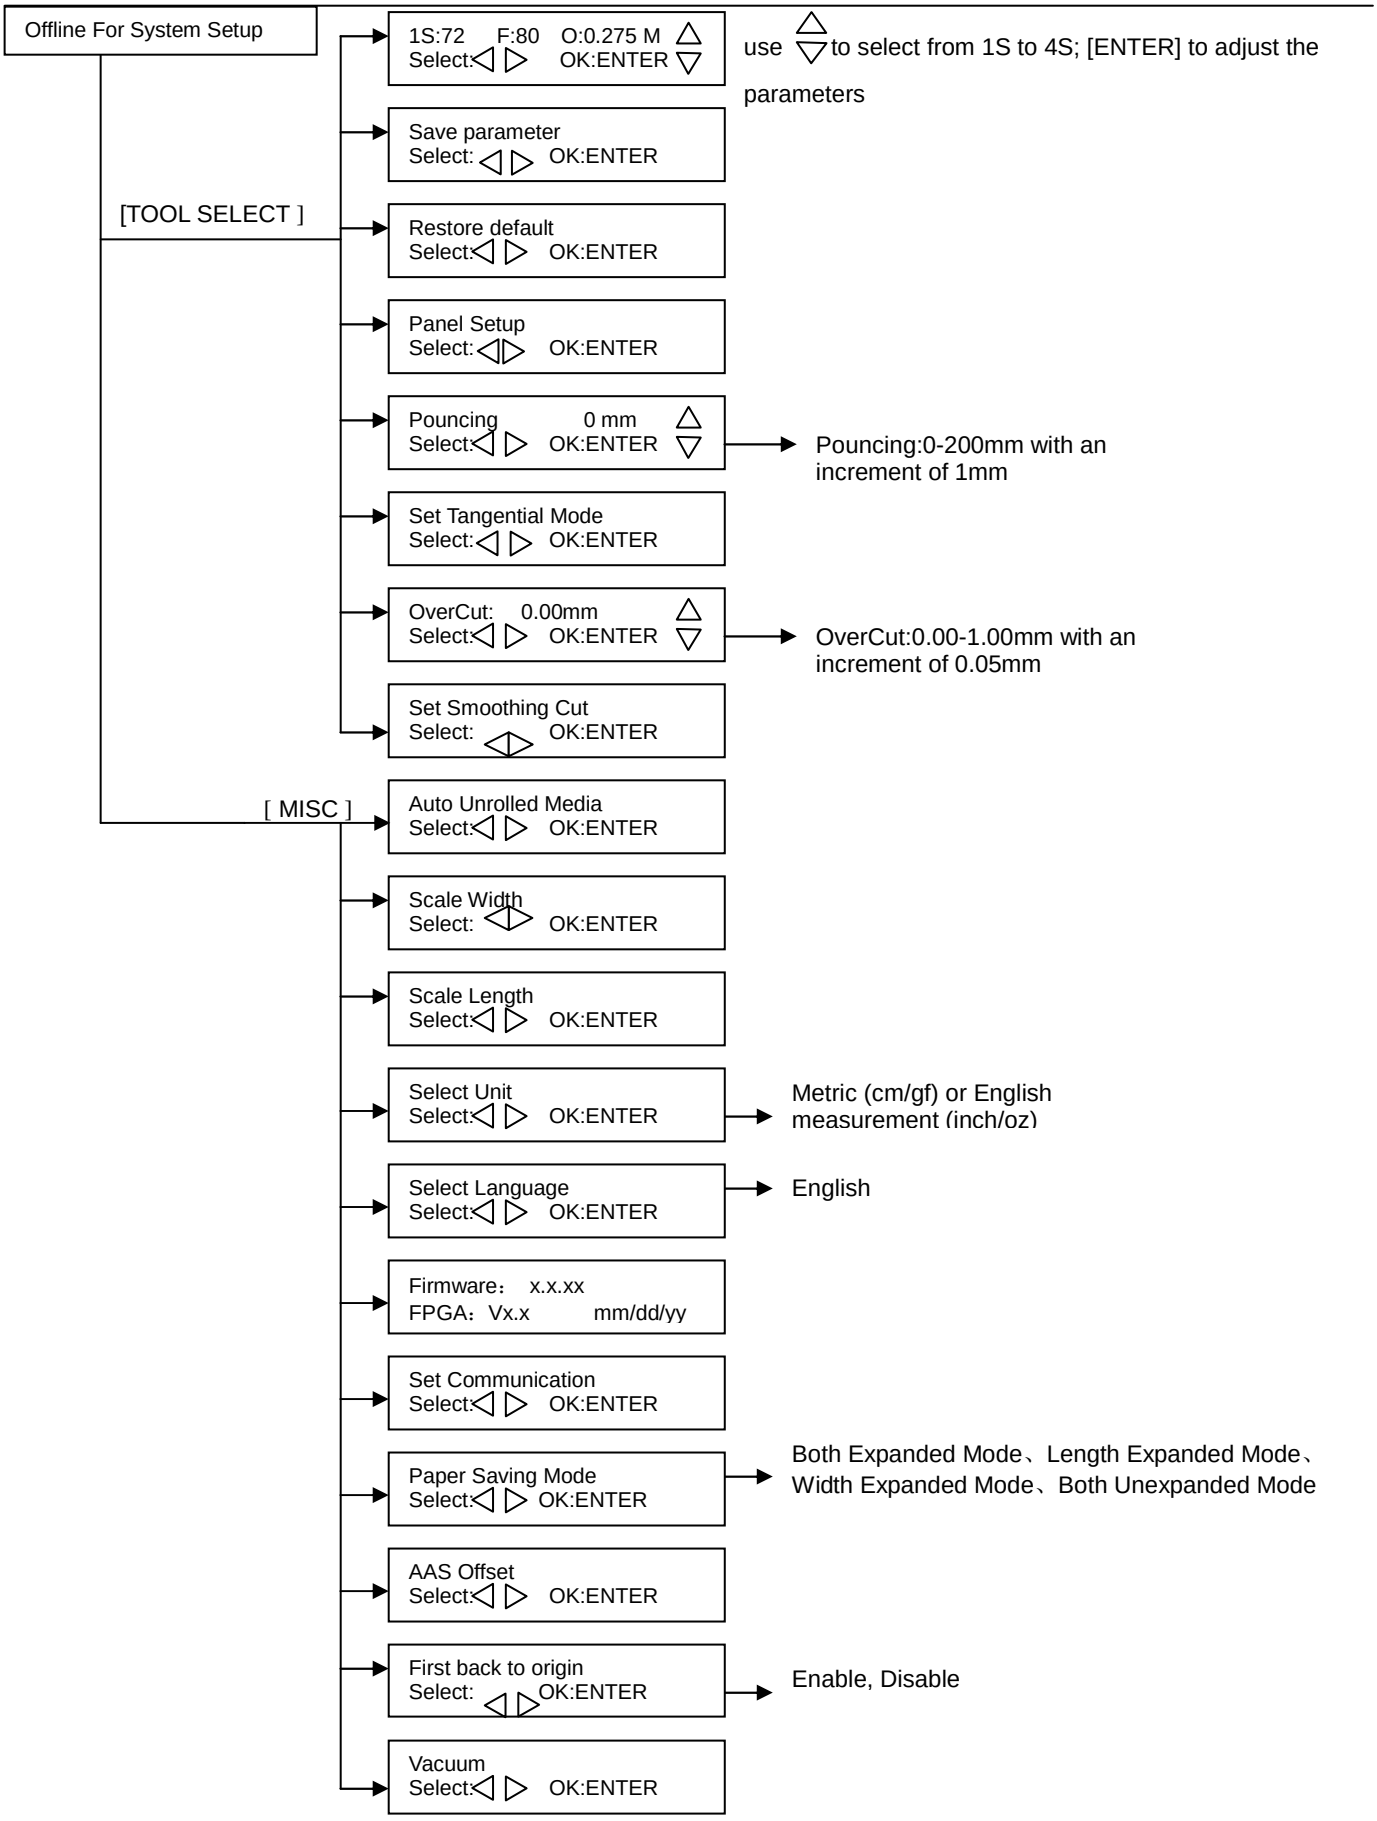
Offline For System Setup
[TOOL SELECT]
[MISC]
1S:72 F:80 O:0.275 M
Select: OK:ENTER
use to select from 1S to 4S; [ENTER] to adjust the parameters
Save parameter
Select: OK:ENTER
Restore default
Select: OK:ENTER
Panel Setup
Select: OK:ENTER
Pouncing 0 mm
Select: OK:ENTER
Pouncing:0-200mm with an increment of 1mm
Set Tangential Mode
Select: OK:ENTER
OverCut: 0.00mm
Select: OK:ENTER
OverCut:0.00-1.00mm with an increment of 0.05mm
Set Smoothing Cut
Select: OK:ENTER
Auto Unrolled Media
Select: OK:ENTER
Scale Width
Select: OK:ENTER
Scale Length
Select: OK:ENTER
Select Unit
Select: OK:ENTER
Metric (cm/gf) or English measurement (inch/oz)
Select Language
Select: OK:ENTER
English
Firmware： x.x.xx
FPGA：Vx.x mm/dd/yy
Set Communication
Select: OK:ENTER
Paper Saving Mode
Select: OK:ENTER
Both Expanded Mode、Length Expanded Mode、Width Expanded Mode、Both Unexpanded Mode
AAS Offset
Select: OK:ENTER
First back to origin
Select: OK:ENTER
Enable, Disable
Vacuum
Select: OK:ENTER

3.4 Menu Items

Below describes the functions of menu items

Menu or Key	Function	Setting	Default
--- Media sizing ---			
Place Media And Then Lower Down The Lever	To instruct the user to lower the lever after the material is loaded. When the medium is loaded, the user will be requested to lower the lever; once the lever is lowered, users can proceed to the three sizing modes (Roll/Edge/Single).		
Roll	To measure media width.	Maximum Tracking 150 meters	
Edge	To measure media width and pull the media back till the front paper sensor open.	Maximum Tracking 150 meters	
Single	To measure media width and length.	Maximum Tracking 10 meters	
--- POWER ---			
	To indicate the power status.		
[Arrow Keys]			
	1. To move the tool carriage position on X or Y axis. 2. To select functions or change values of settings.		
[ENTER]			
	1. The displayed parameters will be saved automatically. 2. To set a new origin at the present tool carriage position. In “offline” mode, moving the tool carriage to desired position by [Arrow Keys], then press [ENTER] key to set a new origin. While moving with the parameters of XY-axes displayed, press [MISC] key will enable fine-tune movement; press [MISC] key again to disable the function.		
[PAUSE/RESUME]			
	To temporarily halt the cutting process. To resume the process by press [Pause/Resume] key again.		
[ONLINE/OFFLINE]			
	1. To switch between online mode and offline mode. 2. To stop the cutting job or abort the change of setting. Once press this key, the cutting job will be terminated immediately and cannot be resumed.		
[OFFSET]			
	To set or modify the distance between the blade tip and the center axis. Please refer to section 4.3 or Chapter A-2 for more information.	0.000~1.000mm	0.275mm
[FORCE]			
	To set or modify the value of tool force. When the cutting force exceeds 450g, the maximum cutting speed would be 15cm/sec and the cutting quality would be Small Letter Mode (0.2g) and while the cutting force is 300g-449g, the maximum cutting speed would be 30 cm/sec and the cutting quality would be Fine Mode (0.5g)	5~600gram; 5 gram/per step	80 gram
[SPEED]			
Speed	To set or modify tool down speed at horizontal moving.	3~153cm/sec; 3cm/sec per step	72cm/sec

Up Speed	To set or modify tool up speed at horizontal moving.	3~153cm/sec; 3cm/sec per step	72cm/sec
Cutting Quality	To set or modify cutting quality. While cutting small letter, set as “Small letter”. While cutting in high speed, set as “Draft”. For normal operation, set as “Normal”.	Draft, Fair, Normal, Fine, Small Letter	Normal
[CUT TEST]			
Square Cut	To perform a cutting test at present blade position. For more information, please refer to “4.3 Adjusting the Cutting Force and Offset” to adjust blade force and cutting speed.		
Repeat AAS Job	To repeat AAS jobs automatically without having to operate on the computer side. Please be noted that this feature is mainly applied to the Single paper mode; please ensure a new piece of material you wish to apply this feature on is loaded and the origin repositioned to the first registration mark before starting. When the first AAS job repeat completes, the user will be offered the choice of “Repeat AAS Job Again”, please press ”Online/Offline” to return to the main menu.		
Repeat Last Plot	Recut: To repeat the last job without re-sending the data.	1~99; 1 per step	
	Copy: To copy the last job without re-sending the data. * 1mm gap will be auto-generated between 2 copies). * If the media length is not enough to continue, it will show below message on LCM: Out Of Space; # of Copies finished * If both functions are enabled at the same time, the cutter will perform the last setting only.	1~99; 1 per step	
Pattern Setting	To provide two patterns for cut test Note: It is recommended to select “Cross” if you are working on thick pieces of materials.	“Arrow” and “Cross” patterns	“Arrow”
Ratio Setting	To adjust the size of the pattern	100%, 200%, 300%, 400%	100%
Blade Length Adjust	Please see 2.5 Automatic Blade Length Adjustment for further details.	0.00mm-5.00mm	0.00mm
[DATA CLEAR]			
	To clear up buffer memory.		
[TOOL SELECT]			
Save Parameter	To save pattern(s) of cutting parameters for later use. There are 4 sets of parameters saved in the panel. Use Page Up and Page Down keys to select the set of parameters you wish to adjust, press “Enter” to confirm (the number shown on the upper left corner will change accordingly). Each set of parameters includes Speed, Force, Offset, Up Speed and Quality though the latter two will not be displayed in this section. To adjust or check individual parameters, go back to the responding keys on the panel and press “Enter” to	Patterns1~4	Pattern 1

	confirm.		
Set Smoothing Cut	To enable smooth-cutting function. This function aims to make connections smoother and is suggested to be disabled when cutting small-sized images or characters		Enable
Over Cut	To generate an overcut to facilitate weeding. This function mainly applies to thick materials, aiming to sharpen corners and ensure perfect connections.	0.00mm-1.00mm 0.05mm/per step	0.00mm
Set Tangential Mode	To enable the emulated tangential-cutting mode for thicker media types and small letter cuts. Note: while the Offset value setting at 0.000 mm, “Set Tangential Mode” will automatically be disabled.		Enable
Pouncing	To make perforated patterns. * In order to use this function, Pouncing tool must be installed. * Before start pouncing, place pouncing strip on top of the cutting pad to protect the cutting pad. * Set the value as 0 mm to disable the pouncing mode. * Pouncing tool is an optional item.	0~200mm	0mm
Panel Setup	Accept setup command: To accept commands of the Force, Speed, Cutting Quality, and Offset only via software.		
	Control panel only: To accept commands of the Force, Speed, Cutting Quality, and Offset only via control panel of the cutter.		
Restore Default	To turn all parameters of the menu items to factory-default settings.		
[MISC]			
Auto Unrolled Media	To avoid paper jam and motor crash by automatically unroll media (50cm and up) before cutting while enabled. . * Auto-unroll only affects on roll/edge media. * Using Single mode to size media will disable this function automatically. * If the length of the rolled media is less than 2 meters or the weight is light, it is recommended to set this mode disabled.		Enable
Vacuum	To help improve tracking and cutting accuracy by turning on the fans. If you turn off the vacuum system, the fans will remain inactive during cutting or plotting.		Enable
First Back to Origin	To enable the carriage back to the previous origin; when “Enable” is selected and the button Online/Offline has been pressed, the carriage will go back to the previous origin while the selection of “Disable” will not allow the carriage to do so.	Enable Disable	Enable
AAS Offset	To set or modify AAS offset value. You can refer to “5.3 Printer Test” for more details.		
Paper Saving Mode	To save media by four different modes: 1. Length expanded mode 2. Width expanded mode 3. Both expanded mode 4. Both unexpanded mode		Length expanded mode
Set Communication	To build up the communication between host computer and cutter. *Baud Rate* is to determine the speed of data transmission. *Data Bits* refers to the size of one block of data. *Parity* is used to check if data was revived correctly or not. 9600, n, 7, 1, p 9600pbs, 7 Bits with NO Parity 9600, o, 7, 1, p 9600pbs, 7 Bits with ODD Parity 9600, e, 7, 1, p 9600pbs, 7 Bits with EVEN Parity		

	9600, n, 8, 1, p 9600pbs, 8 Bits with NO Parity 9600, o, 8, 1, p 9600pbs, 8 Bits with ODD Parity 9600, e, 8, 1, p 9600pbs, 8 Bits with EVEN Parity 19200, n, 7, 1, p 19200pbs, 7 Bits with NO Parity 19200, o, 7, 1, p 19200pbs, 7 Bits with ODD Parity 19200, e, 7, 1, p 19200pbs, 7 Bits with EVEN Parity 19200, n, 8, 1, p 19200pbs, 8 Bits with NO Parity 19200, o, 8, 1, p 19200pbs, 8 Bits with ODD Parity 19200, e, 8, 1, p 19200pbs, 8 Bits with EVEN Parity		
Firmware Version	To display the version number of Firmware and FPGA code.		
Select Language	To select displayed languages on LCM panel in English, Spanish, Italian, Deutsch, Japanese, Portuguese, Polish, Turkish or French.		English
Select Units	Provide two-unit systems for users convenient.	cm/gram; inch/oz	Metric
Scale Length Scale Width	To adjust the scale of media length and width that may cause by the thickness of the media. The Denominator is the actual length, and the Numerator is the ideal length measured from the resultant. For example, cutting a line with 500.0 mm length. The procedure as follows: 1. Press the [LEFT ARROW] to choose the Numerator and select 500.0 mm, 2. Cut the length by sending a graph file, 3. Measure the length then use the [RIGHT ARROW] key to choose the Denominator, then 4. Press [UP ARROW /DOWN ARROW] to change the values of the actual length.		

4. Operation

4.1 Media Loading

4.1.1 Loading the Sheet Media

To load the media properly, please follow the procedures listed below:

Adım 1

Use the lever on the upper right side of the cutting plotter to raise or lower down pinch rollers. Pull the lever forward until it makes a clicking sound then the pinch rollers are raised (Şekil 4-1).

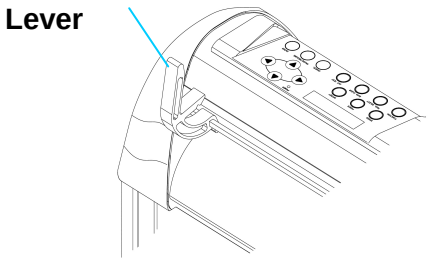

Şekil 4-1

Adım 2

Load your media on the platen and slide it under the pinch rollers from either the front side or the backside. The **alignment rulers** on the platen extension will help you to adjust the media precisely.

Note:
Be sure that the media must cover the paper sensors on the platen when loading the media. At least one of the two paper sensors (Şekil 4-2) should be covered. Once the media covers the sensor, the cutting plotter will size the media width and length automatically.

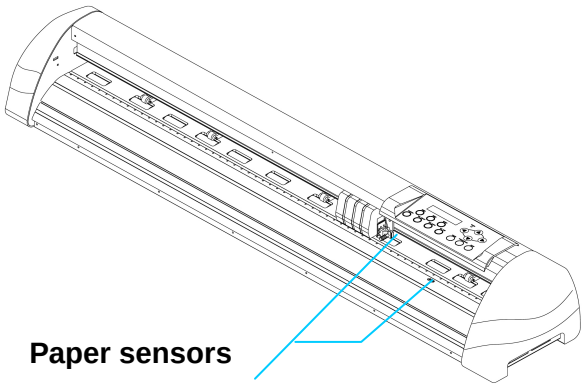

Şekil 4-2

Adım 3

Then move the pinch rollers manually to the proper position. Be sure the pinch rollers must be positioned above the grid drum. The **white marks** on the top trail will remind you where the grid drums are (Şekil 4-3).

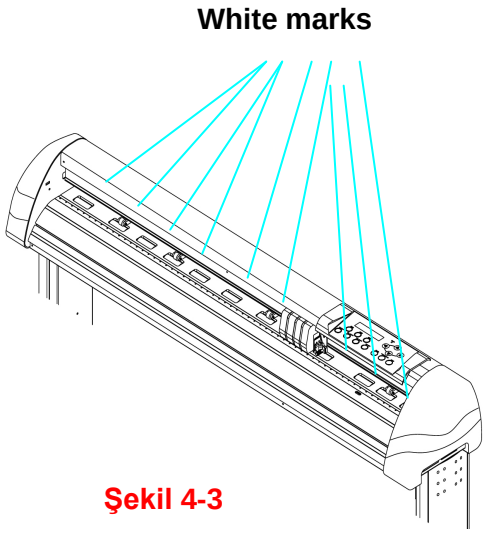

Şekil 4-3

Adım 4

Push the lever backward to lower down the pinch rollers.

Adım 5

Turn on the power, the tool carriage will measure the size of the media automatically. And the plotting cutter begins to work.

Note:

1. Always adjust the position with the pinch roller raised.
2. Move the pinch roller by applying force at the rear portion of the pinch roller support.
3. Do not move it by holding its front rubber roller (Şekil 4-4).

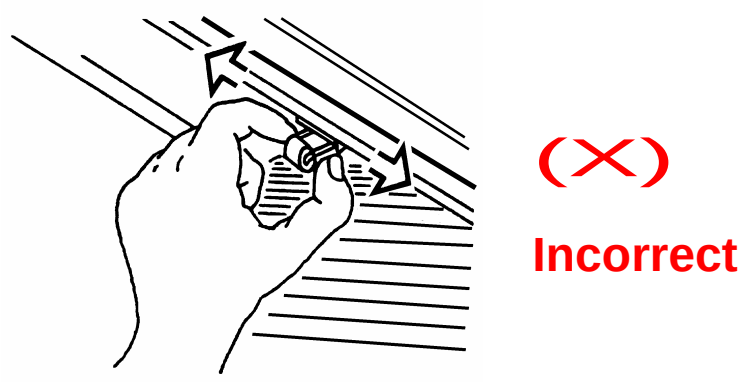

Şekil 4-4

Note:
Please pull up the bottom of all pinch rollers (Şekil 4-5) before the lever is pushed backwards to ensure accurate media width detection.

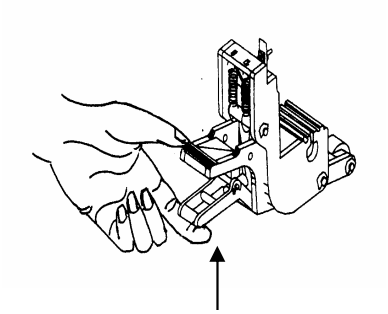

Pull up bottom to release grip

Şekil 4-5

4.1.2 Loading the Roll Media

Adım 1

Put the roll media guide bushes on two roll holders (Şekil 4-6).

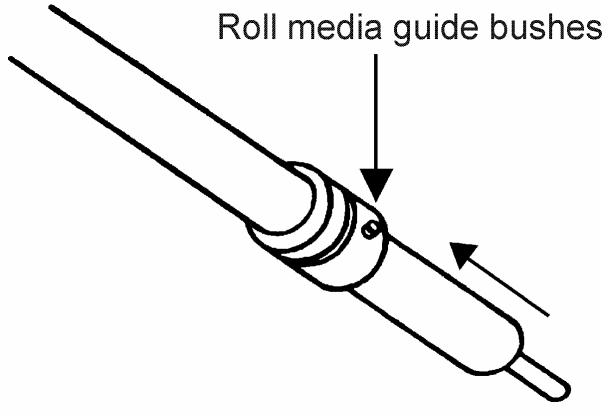

Şekil 4-6

Adım 2

-- Option A (Recommended)

Insert the two roll holders into the roll media support set then place the roll media directly between the two roll holders (Şekil 4-7).

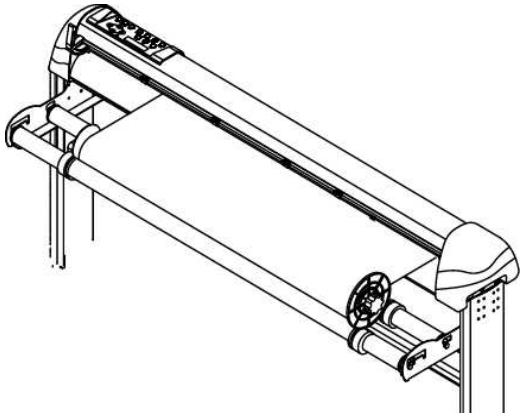

Şekil 4-7

-- Option B (Use the media flanges)

Insert a roll media flange at the end of each roll media and tighten the thumbscrew until the roll media is firmly gripped(see Şekil 4-8).



Şekil 4-8

Then put the roll media on the roll holders. Adjust the position of the roll media ensure that media flanges are able to run in the grooves of media guide bushes. (Şekil 4-9)

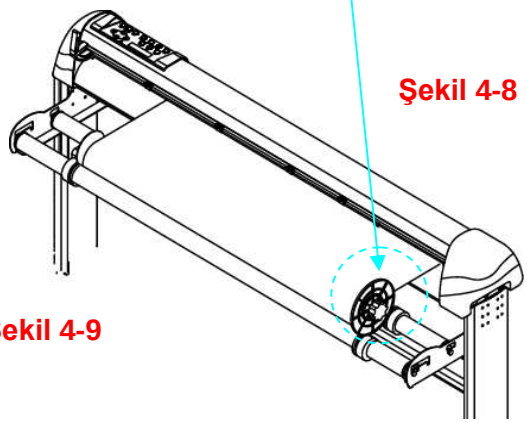

Şekil 4-9

Adım 3

Load the media on the platen. Please refer to “4.1.1 Loading the sheet media”. After loading the roll media, flatten the media on the platen and hold the front edge of the roll media firmly (Şekil 4-10).

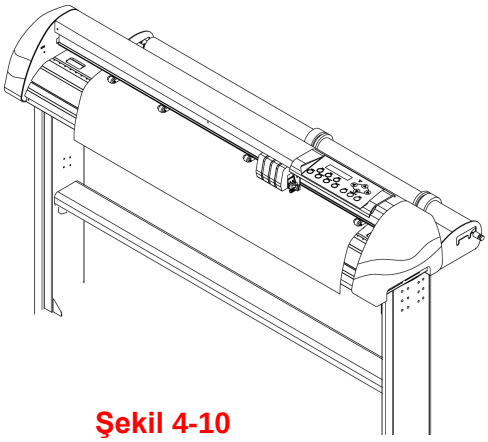

Şekil 4-10

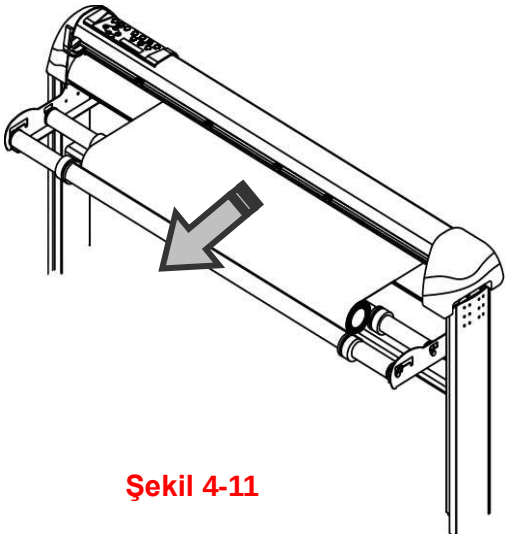

Şekil 4-11

Adım 4

Turn the roll downward to make an equal tension across the media (Şekil 4-11)

Adım 5

Move the pinch rollers to the appraise location and note that the pinch rollers must be positioned above the grid drums.

> **Note:**
> Make sure that the media tension is equally distributed from left to right. If the media were not tightened enough against the platen, it would cause tracking problems!

Adım 6

Push the lever backward to lower down the pinch rollers.

Adım 7

Fix roll media guide bushes on the roll holder to secure the roll media.

Adım 8

Turn on the power switch, the tool carriage will sizing the media automatically.
Then the cutting plotter is ready to work.

Adım 9

Use the reverse steps to remove the media.

4.2 Tracking Performance

In order to achieve the best tracking performance for a long plot, we recommend some significant media loading procedures described as follows:

If the media length is less than 4 meters, leave the margin of 0.5mm—25mm in the left and right edges of the media (Şekil 4-12).

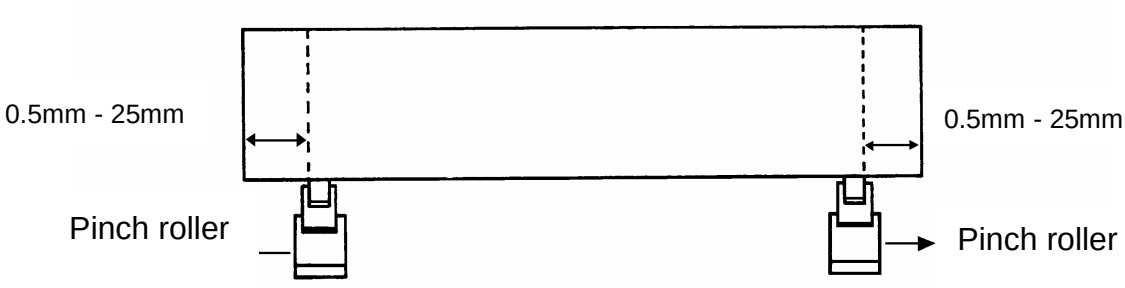

Şekil 4-12

If the media length is greater than 4 meters, leave at least 25mm margin on the left and right edges of the media (Şekil 4-13).

Şekil 4-13

Please refer to the paragraph “4.5 How to Make A Long Plot” for more details.

4.3 Cutting Force and Offset Adjustment

Before sending your designs for cutting, you may perform a “cut test” to generate satisfactory cutting results. The “Cut Test” should be repeated until the appropriate cutting conditions for the media are discovered.

After sizing the media, press [CUT TEST] button to select the “square cut”, and press [ENTER KEY] to confirm.

The default cutting force and offset value of the cutting test are 80gf and 0.275mm respectively. Press [ARROW KEY] to move the tool carriage to the position where you like. Then, press the [ENTER KEY] to perform Cut Test.

Note: At the same time, the new origin is also set at the cutting test position.

When the cutting test is completed, a pattern appears. Peel off the pattern to see if it can be easily separated from the media base. If yes, the setup tool force is appropriate. If not or cut through the back paper, press [FORCE KEY] to adjust the tool force until an optimum force is obtained (Şekil 4-14).

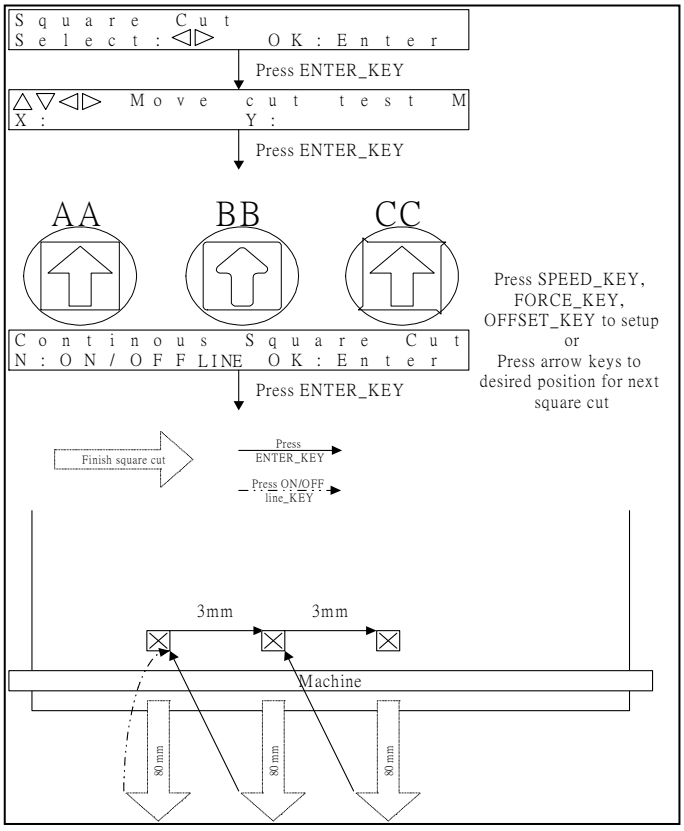

If the pattern appears to be BB or CC layout, press [OFFSET KEY] to adjust the offset value until AA pattern discovered. Increase the offset value when BB occurs and decrease the value when CC appears.

Şekil 4 -14

4.4 How to Cut 3mm Letters

To obtain good quality output, narrow media is recommended. However, if wide media is used, you should:

1. Position two pinch rollers as close as possible to both edges of the cutting area.
2. Make sure the loaded media is held flat with equal tension across the platen.
3. Suggested operation settings:

   Force: 55 gf. (or depending on the material)
   Speed: 45-50 cm/sec
   Up speed: 45-60 cm/sec
   Set smoothing cut: Disable
   Cutting quality: Small Letter

4.5 How to Make A Long Plot

When you are making a long plot with a roll of heavy and wide vinyl, paper you need to use the “AUTO UNROLL MEDIA“ function. The following parameter settings are to help users get the best cutting quality. The actual output quality may vary when using different kind of materials

1. If the length of graphic is between 3m and 5m, the cutting speed is better slower than 72cm/sec and the cutting quality is set as Normal.
2. If the length is longer than 5m or if the material type is difficult to cut, it is better to further slow down the cutting speed.
3. After loading the roll media all pinch rollers are raised at this stage, flatten the media on the platen and hold the front edge of the roll media firmly (Şekil 4-15).

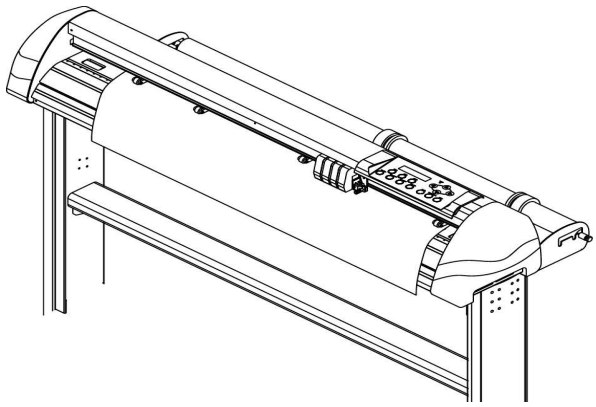

Şekil 4-15

Then turn the roll downward to make an equal tension across the media (See Şekil 4-16)

Make sure that the media tension is equally distributed from left to right. If the media is not tight enough against the platen, it will cause tracking problems.

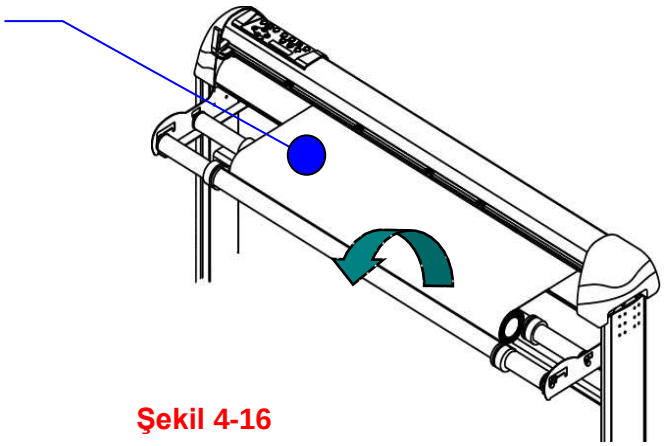

Şekil 4-16

4. Engage pinch rollers.
5. Fixes roll media guide bushes on the roll holder to secure the roll media.
6. The protrusion length of the blade should be longer than the thickness of the vinyl. (Please check the “Blade Specification: About the Tool” in Appendix.) After you notice all the above, you’ll enjoy your gigantic signs production!

4.6 When Completing the Cutting Job

After completing the cutting job, raise the sheet-loading lever, and then remove the material. You can also cut off the finished job by the Safe Blade (a standard accessory) along the knife guide. (Şekil 4-17)

Şekil 4-17

4.7 ValueCut series Print Driver setting

4.7.1 ValueCut series Print Driver setting > Option Page

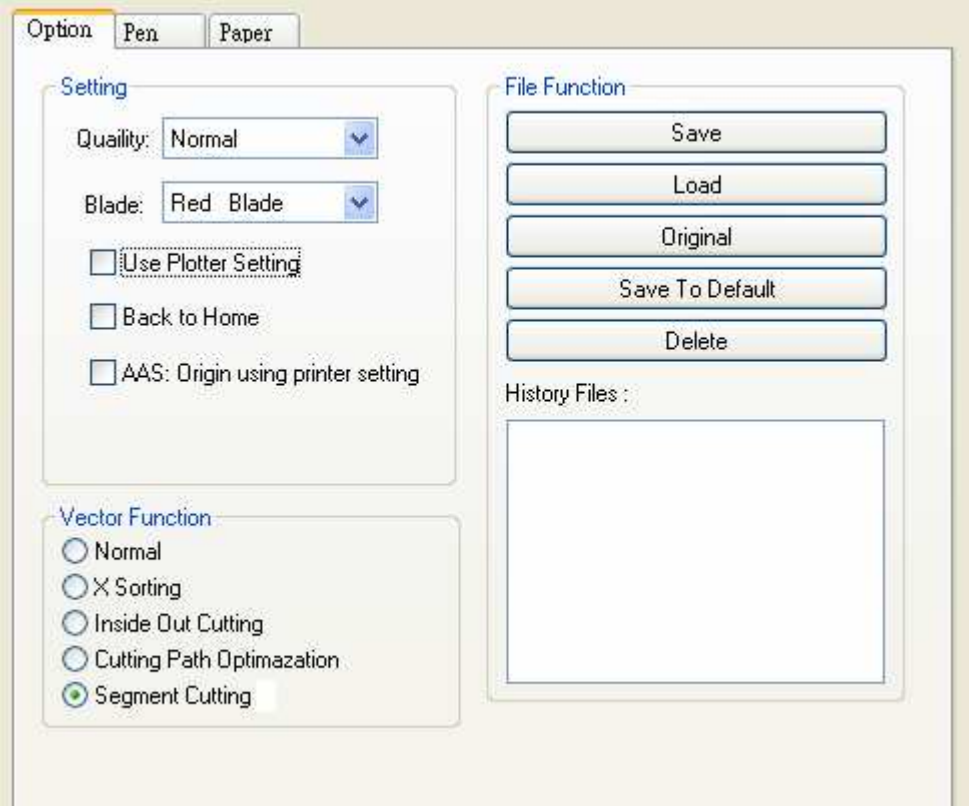

Şekil 4-18

Setting: You can adjust the following settings, depending on your application or results you would like to achieve.

Quality:
[Slower speeds / higher quality - Faster speeds / lower quality]
The Cutting Quality setting function allows you to adjust and balance vector mode's quality and speed settings based on your specific job. Draft Mode offers the highest output speed, sacrificing quality. Whereas Small letter Mode offers the highest quality, sacrificing output speed. Keep in mind that speed and quality are usually at a tradeoff.

Blade:
Choose the blade type used for this job.

Use Plotter Setting:
The parameter settings will be set according to those set from the control panel.

Back to home:
The carriage will return to the original position when this option is selected.

Vector Function
Normal:
This is the default Vector Function setting. The cutting order depends on the order of the graphics created in the application software.

X sorting:
The cutting order is based on the next closest object on the x-axis from the origin.
The cutting order of the sample below will be 1,2,3,4 (please refer to Şekil 4-20).

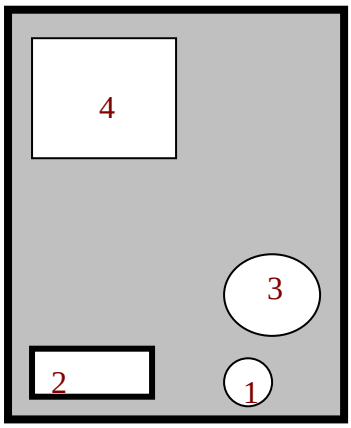

Şekil 4-19

Inside Out Cutting:
When performing a vector cutting job in which your image has one vector cut area enclosed within another vector cut area, select the Inside-out Sorting mode. This mode will automatically instruct the print driver to process the inside vector image and moving outwards. This setting will always automatically direct the cutter to cut from the inner most vector shape and move outwards.

Cutting Path Optimization:
This is a setting that will minimize your process time. When selected, the print driver will analyze your image and automatically determine the most efficient processing path to process your image.

File Function (Option Page):
The file function section allows you to manage various cutter parameters. This section is useful when performing repeated jobs on a variety of objects, allowing you to save your frequently used cutter parameters and load them in the future.

- History File: This section contains a list of the recent files you have recently created and worked.

- SAVE: This function will save current print driver parameter settings to a file under the specified location on your computer. (Saved parameter setting files will be tagged with the ValueCut series extension)

- LOAD: This function allows you to load previously saved print driver parameters.

- ORIGINAL: This function will load the print driver's original factory parameter settings.

- SAVE TO DEFAULT: This function allows you to save your current print driver parameters as the default startup settings.

- DELETE: This function will delete the file you select from the History File section. Please note the delete function only removes the file from the history file section, it does not remove the ValueCut file from your hard drive, if you wish to completely remove the file from your hard disk, and you will
have to manually delete the file from your operating system.)

Note:
If you are using Windows 2000 or XP as your operating system, then make sure you log in with an administrator or administrator-rights account in order to properly save cutter parameter settings.

4.7.2 ValueCut series Print Driver setting > Pen Page

The ValueCut series incorporates the use of 16 different colors to represent 16 different parameter settings including cutting speed, force and blade offset settings when cutting. These colors are referred to as “Pens”. Think of each pen as a designated cutter setting, rather than as a color. An image that is made up of black, red and blue colors will be processed using the cutter settings designated for each particular color. In order to utilize up to 16 different pens (cutter parameter settings), make sure your graphics software can recognize and utilizes the 16 pen colors designated by the ValueCut series print driver (please refer to Şekil 4-21).

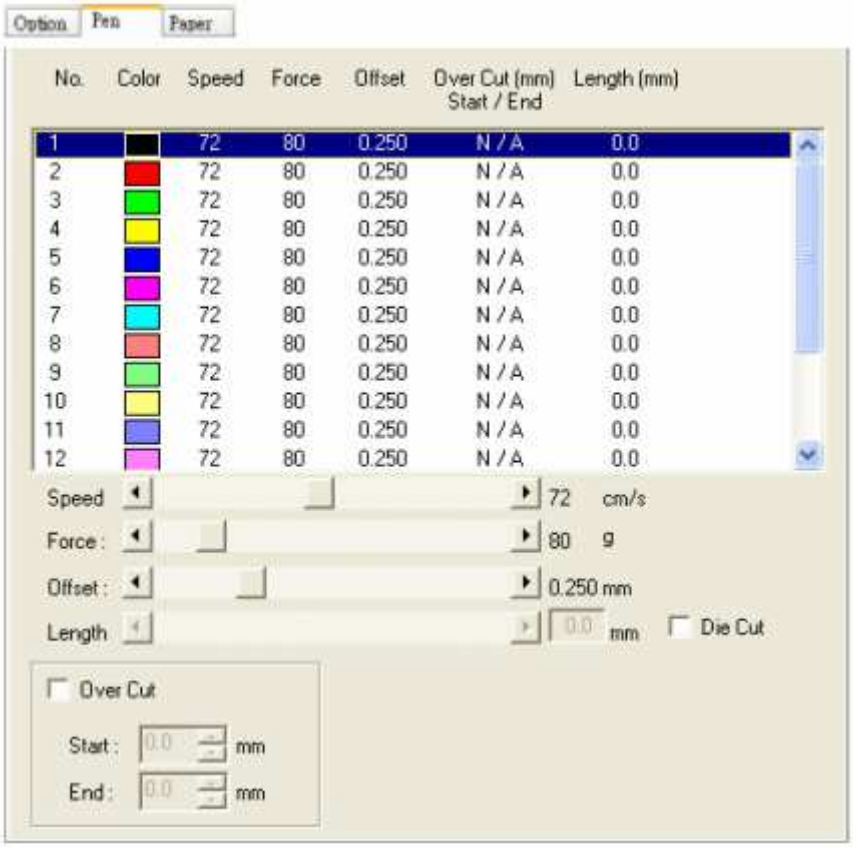

Şekil 4-20

If you would like to specify your own colors to designate to a particular cutter setting, then all you have to do is to double-click on that particular pen color from the pen menu and a color manager window will open where you can select “define custom colors” to define your own color (shown in the picture below). This is useful when your image is composed of colors that are not part of the pen menu’s default color selection, and instead of modifying your image, you simply would like to assign the cutter settings based on the existing colors from your current image.

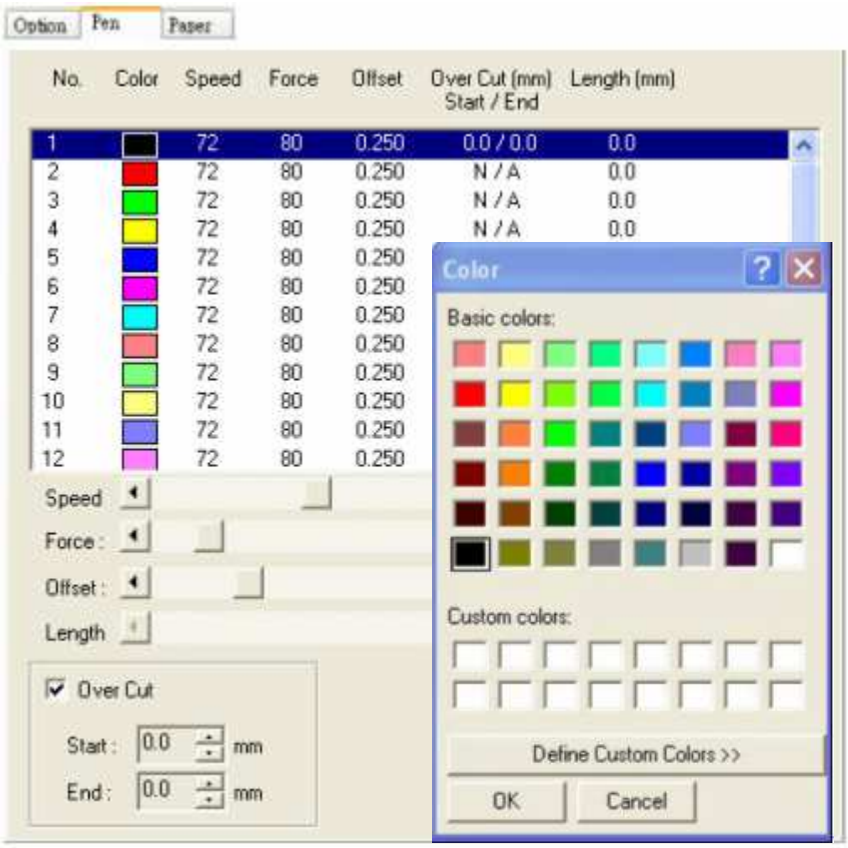

Şekil 4-21

Note:
The ValueCut series print driver cannot store more than 16 pen colors or different cutter parameter settings per file.

Speed (Pen Page) [DEFAULT SETTING: 72cm/sec]

The speed slider controls the cutter's cutting speed during operation with a range setting from 3 – 153cm/sec. The ValueCut series maximum cutting speed is 153 cm (60 inches) per second.

Force (Pen Page) [DEFAULT SETTING: 80g]

The force slider controls the cutting force during operation with a range setting from 5 – 600g.

Offset (Pen Page) [DEFAULT SETTING: 0.25mm]

The offset slider controls the blade offset depending on the blade you used.

Die Cut (Pen Page)

The Die Cut function can allow you to cut through the backing of the material. You can only use the first 8 pen for this function. If you choose Pen No.1 and click the Die Cut function, the Pen No.9 will become Pen No.1* for setting different parameter for the same cutting line. (Şekil 4-24)

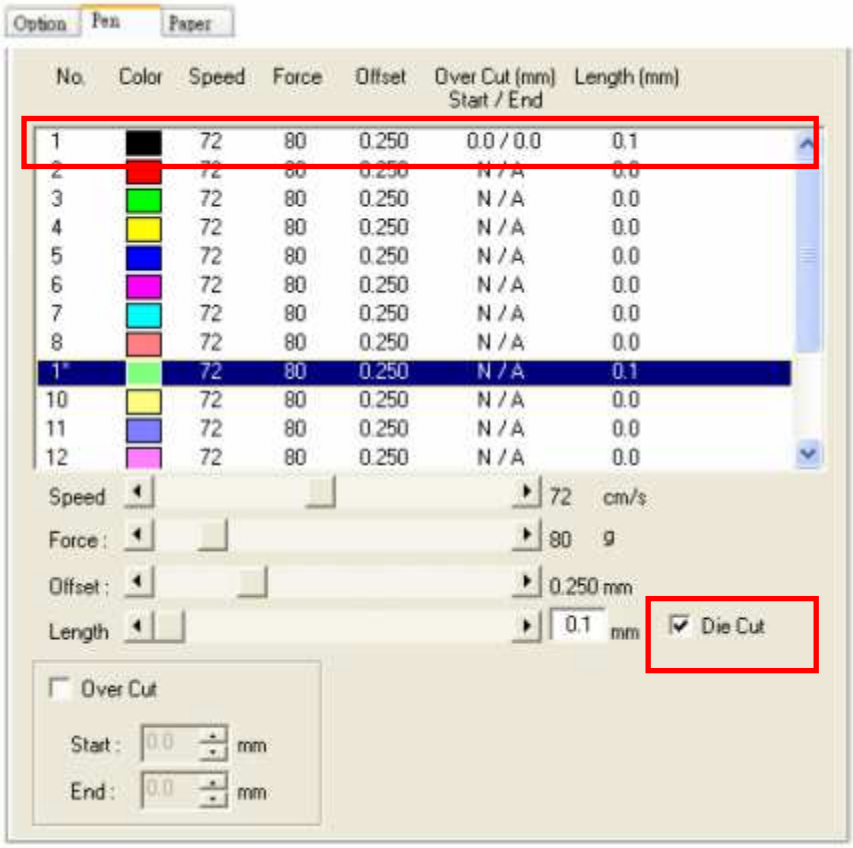

Şekil 4-22

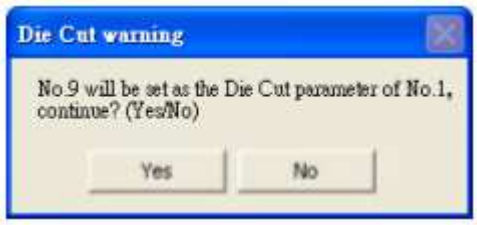

Şekil 4-23

You can adjust the parameter such as force and length in both Pen No.1 and Pen No. 1* as you need.

For example:

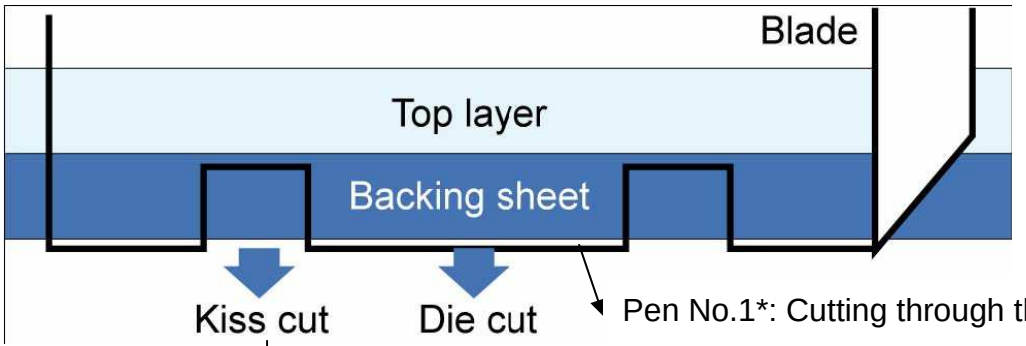

Şekil 4-24

Pen No.1*: Cutting through the backing of the material

Pen No.1: Cutting through the vinyl only

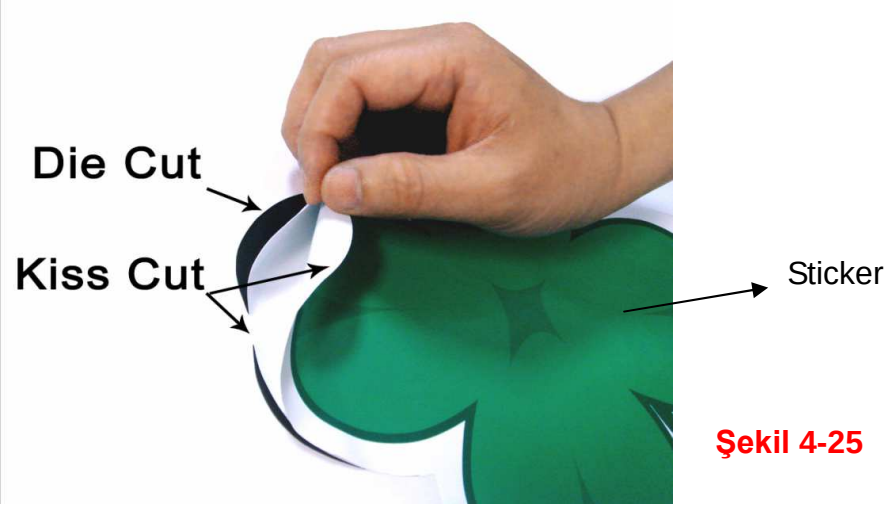

Şekil 4-25

4.7.3 ValueCut Print Driver setting > Paper Page

Paper Size (Paper Page) [DEFAULT SETTING: Y = the width of machine; X will be automatically set to be twice the length of Y]

The paper size represents your total work area. The X value represents the length and the
Y value represents the width. The paper size should be set as the same as your image so you can get a better cutting quality.

Unit (Paper Page) [DEFAULT SETTING: Metric (mm)]

Here you can set your preferred measurement standard in which you would like use with the VALUECUT series print driver. You can choose between metric or imperial standards.

Chapter 5 Automatic Aligning System

5.1 Introduction

The ValueCut series cutting plotters feature a standard Automatic Aligning System (AAS II) to guarantee precise contour cutting quality by detecting the registration marks printed around the graphic.

Notice

- Avoid any kind of light source horizontally illuminating the AAS module.

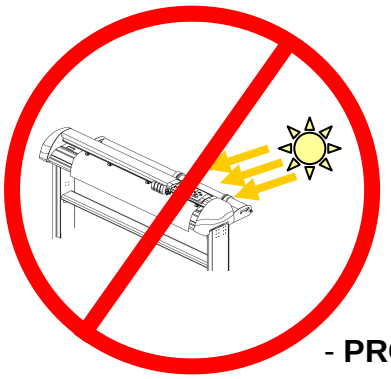

- **PROHIBITED**

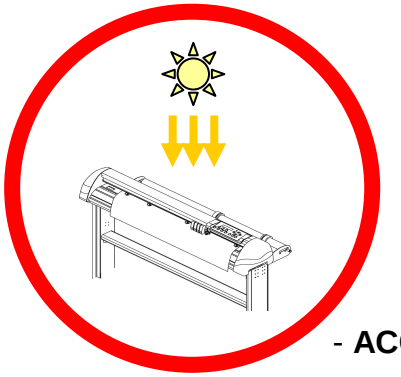

- **ACCEPTABLE**

- DO NOT take off the cover of AAS module while in operation.

- **PROHIBITED**

5.2 AAS Calibrating the System

The AAS system has one calibration procedures to ensure maximum accuracy of AAS operation. To operate the AAS you need to learn about the method of media feeding firstly. (Refer to 4.1 Media Loading.)

5.2.1 Media Calibration

Media Calibration is to ensure the sensor being able to recognize the registration marks. The factory default works on a wide range of materials. However, certain types of materials may not work properly. Performing a media calibration may become necessary while working with such materials to change the sensitivity of AAS for greater reliability. Media calibration adjusts the media feeding according to media type for better accuracy during cutting.

- When to use

We suggest white media for best cutting result. It is not necessary to perform media calibration every time unless the registration marks on the printed media become undetectable in AAS sensing process.

5.2.2 AAS Calibration

The first registration mark is designed to be different in order to identify the origin for AAS auto-detection. The following precaution must be aware for registration marks to be read automatically.

- Type of media
- Registration mark pattern
- Reading range required for detection the registration marks
- Position for registration marks and medium

The registration marks have to be:

- Created by cutting software like CorelDRAW plug-in
- In black color (printing quality of registration marks is essential; incorrect, misaligned colors, blurry or smeared printout might leading to inaccurate cutting result)
- Length: The length of marks
  → Range: 5mm~50mm
  → Optimized Setting: 25mm
- Thickness: The line thickness of marks
  → Range: 1mm~2mm
  → Optimized Setting: 1mm
- Margin: The distance between marks and images

→ Range: 0mm~50mm

→ Optimized Setting: 5mm

The cutter can not detect the marks while:

- Cutter carriage is not located near the outside area of first mark before detecting (See the picture in page 5-7 for auto-detecting area of first mark.)
- Medium thickness is more than 0.8mm
- Transparent medium is used
- Non-monochrome drawing. The marks can't be read if is printed on colored medium
- Dirty or creased medium surface

5.2.3 AAS II on ValueCut

There are three types of AAS II mark patterns: 4-Point Positioning, Segmental Positioning, and Multiple Copies. Note that before print out your designs by inkjet printers, the registration marks have to be created on your graphic designs by cutting software like CorelDraw plug-in.
Hand-made marks or drawings won't be reorganized by Mutoh cutting plotters. For more details about registration mark setting in cutting software, please refer to '**Appendix A-4**: CorelDraw Plug-In Instruction".

1. 4-Point Positioning

This is the basic mark pattern that AAS II will auto detect four registration marks and contour cut images inside those marks.

- Command: Esc.D1;(XDist);(YDist):
- Layout: 4 L-shaped marks at the 4 corners around the design



2. Segmental Positioning

In addition to 4 original points, the intermediate registration marks are added on both X axis and Y axis to help contour cut accurately, especially for cutting large images.

- Command: Esc.D2;(XDist);(YDist);(XAdım);(YAdım):
- Layout:

In-between distance on X: 200~600mm, default 300mm

In-between distance on Y: 200-600mm, default 300mm



- High Precision Long Picture Cutting

ValueCut performs segmental cutting to enhance output qualities.

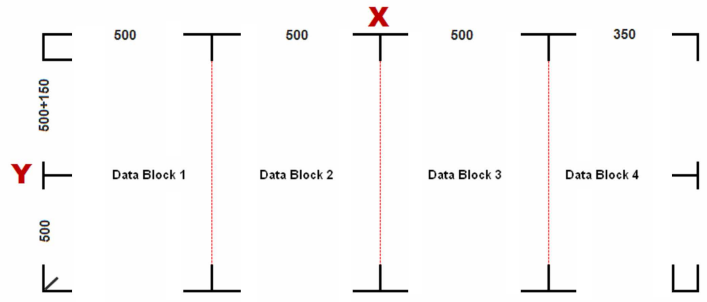

- The object will be output following the Data Block pattern based on the Segmental Positioning parameters.
- Cutting sequence: Date Block1-> Date Block2-> Date Block3- >Date Block4

3. Multiple Copies

The function is used to duplicate images to let you cut quantities of images at a time.The AAS II sensor will automatically scan registration marks for each individual image to ensure the contour cutting precision.

- Command: Esc.D3;(XCopies);(YCopies);(Space):
- Layout:

Condition 1 (Default)

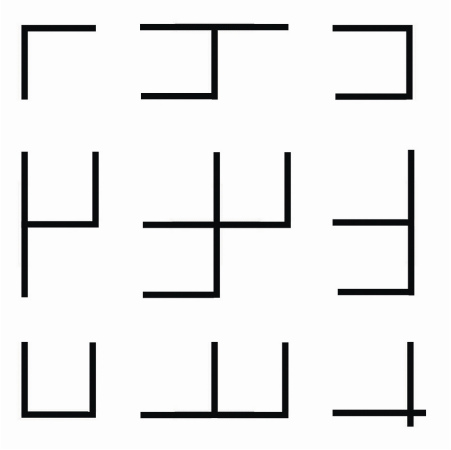

Condition 2

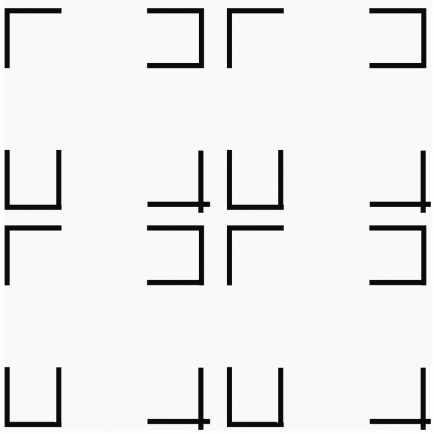

5.2.4 Automatic Distinction of the Plot Direction

For the convenience of users, ValueCut automatically detects the feeding direction of the material when performing contour cutting. Şekil 5-1 shows the Registration Mark detection sequence when the material is fed in the standard way (1->2->3->4) while Şekil 5-2 is how ValueCut detects registration marks (3->4->1->2) when the material is reversely fed. ValueCut is able to detect registration marks and performs contour cutting however users feed the media.

Direction detection steps:

a. Detects the position of the 3rd Registration Mark

b. Proceeds to the 4th Registration Mark to detect the direction

(The existing detection procedure will be performed, followed by the detection of new line segments)

c. The information is reflected in the driver and recalculated before output

d. The registration mark detection and object output process is implemented

(Registration Mark detection sequence: 3->4->1->2)

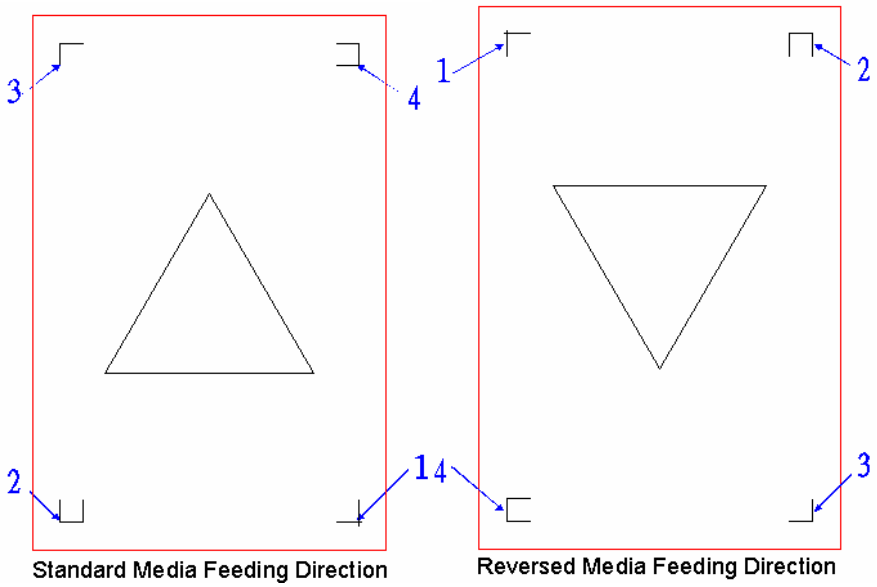

Şekil 5-1

Şekil 5-2

5.3 Printer Test

Before performing AAS contour cutting, it's recommended to print out a test file that you can find in the enclosed Installation CD to make sure the AAS II cutting accuracy of ValueCut.

There are two testing files for AASII:

1. AAS II_X_Y_Offset_Caberation_A4 .eps (A4 size)

2. AAS II_X_Y_Offset_Caberation_600_600 .eps (Default setting, it is recommended for testing)

   Print out the testing graphic. (Please use high precision printer)

   Load the graphic to ValueCut and sent the file to test the cutting job

- If there are any adjustments to be made, you can change the offset value by following the steps:
  - Measure the offset values from the printed line and the actual cutting line.
  - Enter the AAS Offset under MISC function for the values you just measured, then press Enter
  - Test the cutting again
  - AAS II offset X and Y value is defined as following:

    Horizontal line is defined as X and vertical is defined as Y (when facing the cutting plotter)

    When the actual cutting line and the printed line need to be changed towards the direction of origin mark, then simply add the negative value of the offset. If the direction is from the opposite of the origin mark, then enter positive values for the offset (see the following Şekils). This method applies to both X and Y axes.

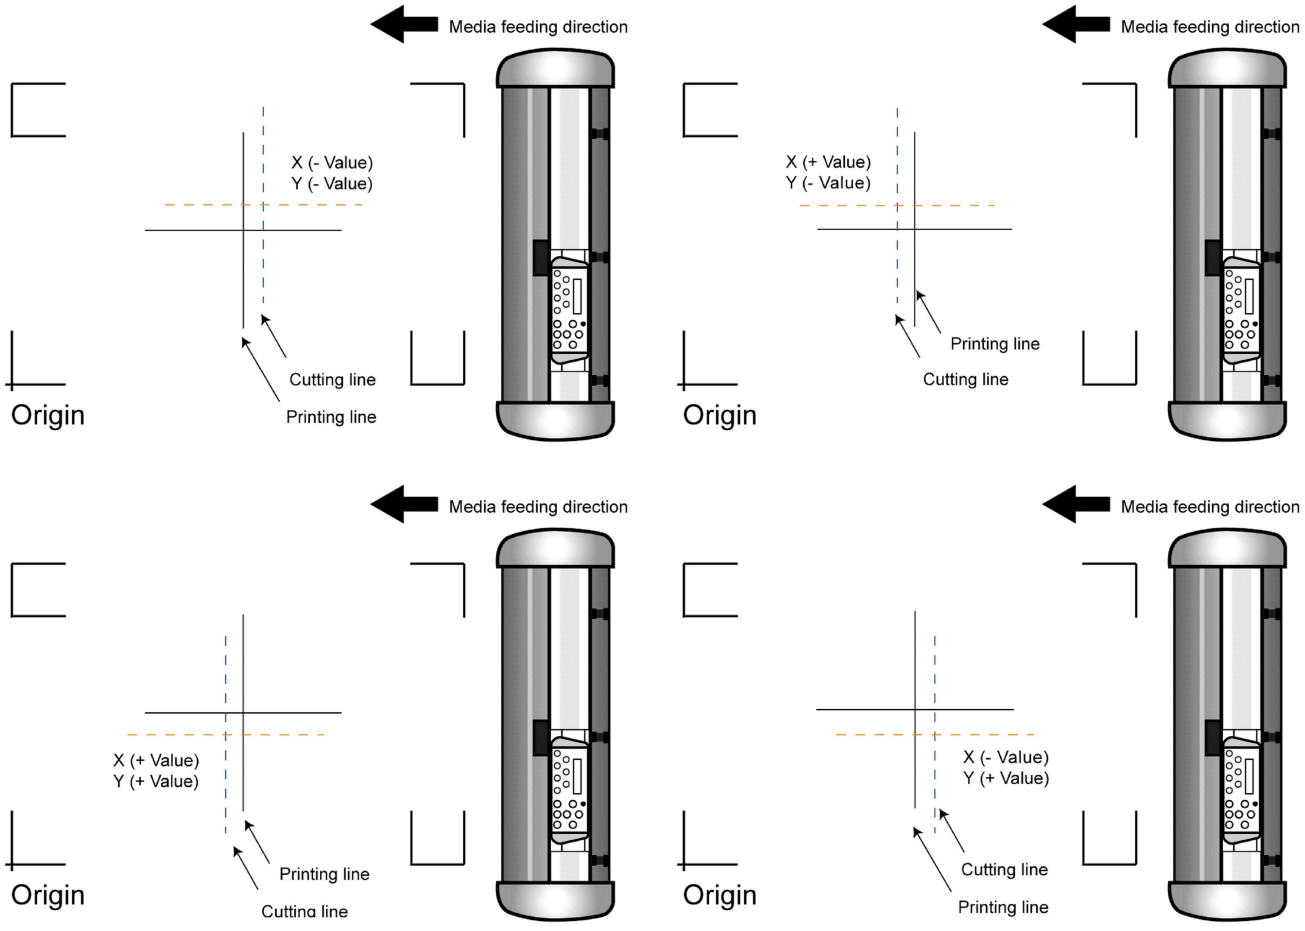

Note:

- Before adjusting the AAS II settings, please proceed scaling for width and length.
- The blade offset value isn't set for this test graphic, please set it according to the blade you use.
- If you have any question, please contact us or your local distributor for assistance.

5.4 Registration Mark Offset Range

Please correctly load your media (refer to the alignment ruler on the platen) to make sure the registration marks are successfully detected. Deviation exceeds the range below will lead to detection failure.

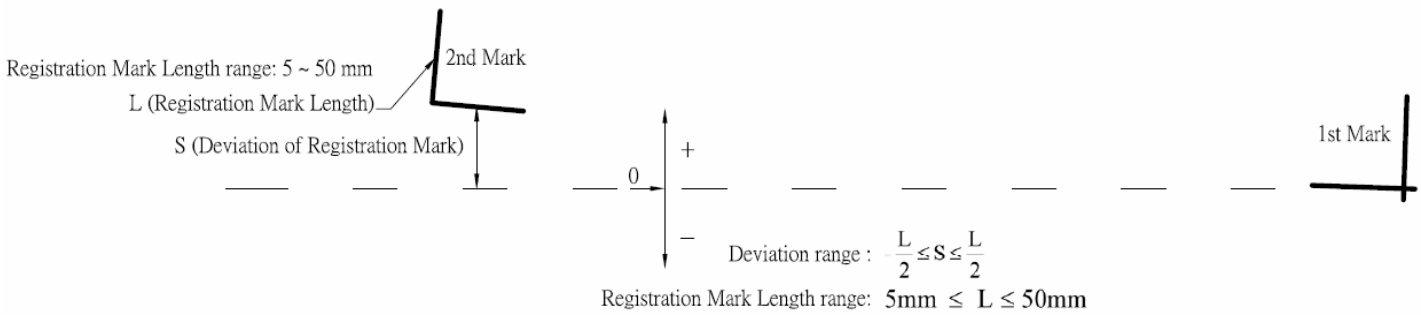
Registration Mark Length range: 5 ~ 50 mm
L (Registration Mark Length)
S (Deviation of Registration Mark)
2nd Mark
1st Mark
0
+
−
Deviation range : $-\frac{L}{2} \le S \le \frac{L}{2}$
Registration Mark Length range: 5mm ≤ L ≤ 50mm

5.5 Contour Cutting

For accurate contour cutting with AAS function, please proceed the following steps:

Adım 1 Creating Graphics

- Create the graphic that you want to print and cut in your software.

- Create a contour for cutting around the graphic.

TIPS1: Leave some space between the graphic and contour line.
TIPS2: Create the contour in a separate layer and assign a different color for it.

- Add registration marks around the graphic.

Note:
The Multiple Copies function is also available. It automatically copy the graphic and registration marks.

Adım 2 Placing the Registration Marks

- The AAS Layout Instruction:

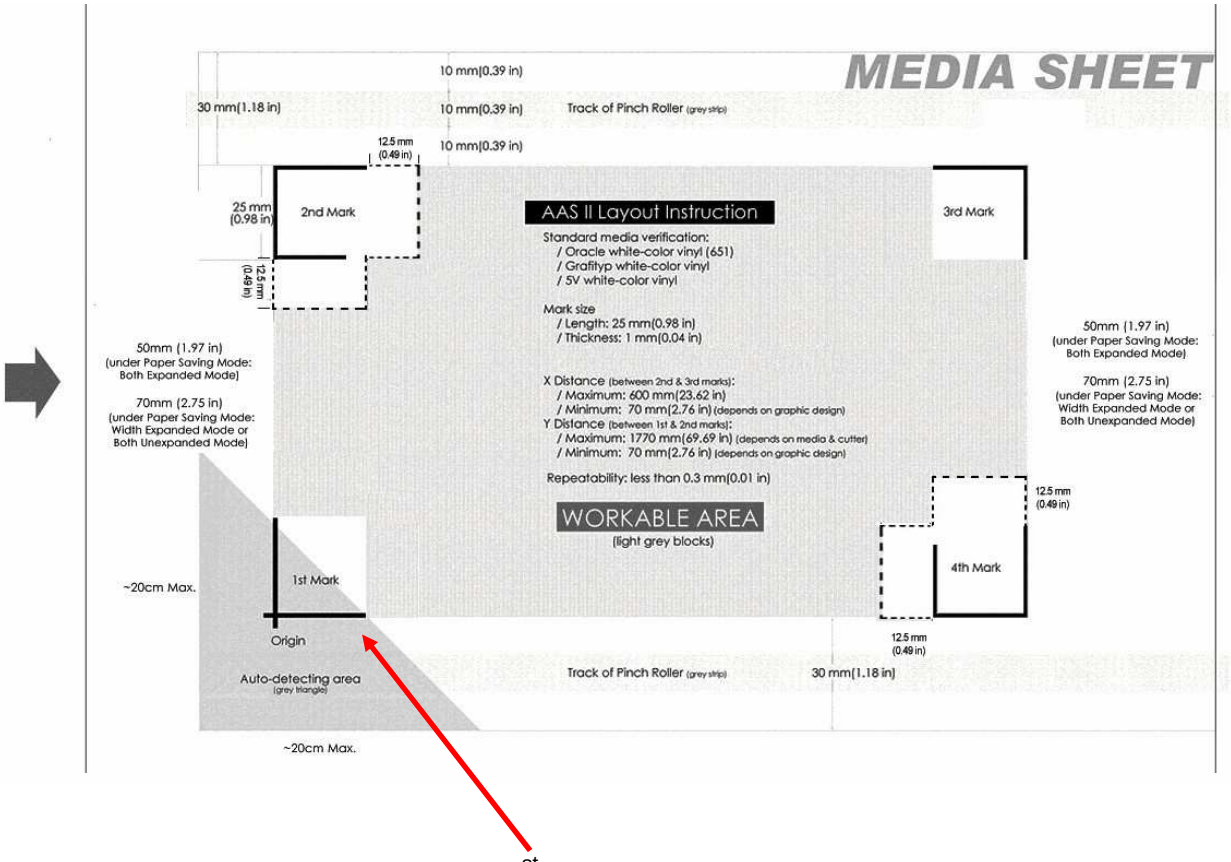
MEDIA SHEET
10 mm(0.39 in)
30 mm(1.18 in)
10 mm(0.39 in)
Track of Pinch Roller (grey strip)
12.5 mm (0.49 in)
10 mm(0.39 in)
25 mm (0.98 in)
2nd Mark
AAS II Layout Instruction
3rd Mark
Standard media verification:
/ Oracle white-color vinyl (651)
/ Grafityp white-color vinyl
/ 5V white-color vinyl
Mark size
/ Length: 25 mm(0.98 in)
/ Thickness: 1 mm(0.04 in)
50mm (1.97 in) (under Paper Saving Mode: Both Expanded Mode)
70mm (2.75 in) (under Paper Saving Mode: Width Expanded Mode or Both Unexpanded Mode)
X Distance (between 2nd & 3rd marks):
/ Maximum: 600 mm(23.62 in)
/ Minimum: 70 mm(2.76 in) (depends on graphic design)
Y Distance (between 1st & 2nd marks):
/ Maximum: 1770 mm(69.69 in) (depends on media & cutter)
/ Minimum: 70 mm(2.76 in) (depends on graphic design)
Repeatability: less than 0.3 mm(0.01 in)
WORKABLE AREA
(light grey blocks)
12.5 mm (0.49 in)
4th Mark
~20cm Max.
1st Mark
Origin
Auto-detecting area
(grey triangle)
12.5 mm (0.49 in)
Track of Pinch Roller (grey strip)
30 mm(1.18 in)
~20cm Max.

* Auto-detection function on the 1st mark covers the grey area

- Suggested 30mm margin on both left and right sides of media sheet.
- Suggested 50-70 mm margin on top and bottom edge of the media sheet to prevent sheets dropping or any error occurred while media sizing.
-

Adım 3 Print the Graphics

- Print the graphic and the marks with your printer



(Scaling = 100%).

- When printing on a roll media, make sure the orientation as following:

Adım 4 Load the printout onto cutter

- The Origin Mark is is different from the rest registration marks. Please make sure the media is fed with correct direction.



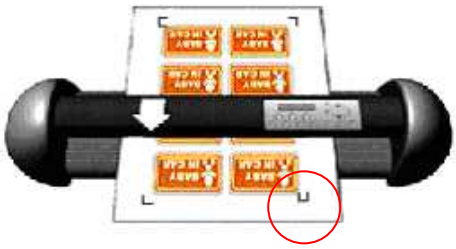

Adım 5 Cut the Contour

- Send out the command from software to perform the contour cutting job.

5.6 Tips for AAS

For getting better results of contour cutting, there are some tips below for your reference.

- Keep light sources simple and avoid illuminating from the sides of cutter.
- Before operating AAS, change the maximum paper size in ValueCut driver property.
  STEP 1 Find the **ValueCut model** in the “Printer & Fax” folder of your PC.

STEP 2 Open the Properties window and select the “Paper” tab.

STEP 3 Change the maximum Paper Size of X to **1200**mm.

- Adjust the cutting speed to between 300~600mm/sec.
- Avoid the registration marks locating on the tracks of pinch rollers.

6. Maintenance

This chapter explains the basic maintenance (i.e. cleaning the cutting plotter) required for the cutting plotter. Except for the procedures mentioned below, all other maintenance must be performed by a qualified service technician.

6.1 Cleaning the Cutting Plotter

Cleaning the machine properly and regularly will ensure optimal performance out of your machine.

Cleaning Precaution !

- Unplug the cutting plotter before cleaning it in order to prevent electrical shock.
- Never use solvents, abrasive cleaners or strong detergents for cleaning. They may damage the surface of the cutting plotter and the moving parts.

Recommended Methods:

- Gently wipe the cutting plotter surface with a lint-free cloth. If necessary, with a damp cloth immersed in water or alcohol. Dry and wipe any remaining residue off a soft, lint-free cloth.
- Wipe all dust and dirt from the tool carriage rails.
- Use a vacuum cleaner to empty any accumulated dirt and media residue beneath the pinch roller housing.
- Clean the platen, paper sensors and pinch rollers with a damp cloth immersed in water or alcohol, and dry with a soft, lint-free cloth.
- Wipe dust and dirt from the stand.

6.2 Cleaning the Grid Drum

1. Turn off the cutting plotter, and move the tool carriage away from the area needed to be cleaned.

2. Raise the pinch rollers and move them away from the grid drum for cleaning.

3. Use a bristle brush (a toothbrush is acceptable) to remove dust from the drum surface. Rotate the drum manually while cleaning. Refer to Şekil 6-1.

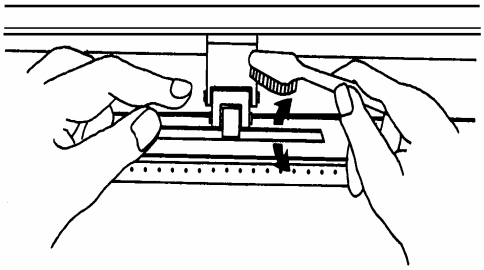

Şekil 6-1

6.3 Cleaning the Pinch Rollers

1. If the pinch rollers require a thorough cleaning, use a lint-free cloth or cotton swab to wipe away the accumulated dust from the rubber portion of the pinch rollers. To prevent the pinch rollers from rotating while cleaning, use your finger to hold the pinch rollers to prevent them from rotation

Note:
The daily maintenance of your cutting plotter is very important. Be sure to clean up the grid drum and pinch rollers regularly for better cutting accuracy and output quality.

7. Trouble Shooting

This chapter is to help you correct some common problems you may come across. Prior to getting into the details of this chapter, please be sure that your application environment is compatible with the cutting plotter.

Note:
Before having your cutting plotter serviced, please make sure that the malfunction is in your cutting plotter, not the result of an interface problem or a malfunction in your computer or a software problem.

Why is the cutting plotter not functioning?

Possible Causes:

7.1 Non-Operational Problems

Check the following first:

- Does the AC power cord plug in properly?
- Does the AC power cord connected to the power connector properly?
- Does the power LED still illuminate?

Solutions:

If the LCM is able to display the message, the cutting plotter should be in a normal condition. Switch off the cutting plotter and turn it on again to see if the problem still existing.

If the LCM is not able to display any message, contact the technician from your dealer.

7.2 Operational Problems

Some mechanical problems or failure during operation will cause some problems. If the problem still exists after the recommended actions have been taken, have your cutting plotter serviced.

7.2.1 LCM Error Messages

The error messages shown on the LCM present the problem first, and followed by recommended actions.

Error, Check Media Or Drum or X Motor	This message indicates that there might be a problem on the **X axis (the media feeding direction)**. Check if the drum is working well and if the media is well loaded. Correct the problem and re-power on to reboot system.
Error, Check Media Or Y Motor	This message indicates that there might be an obstruction to carriage relating to a problem on the **Y axis (the carriage moving direction)**. Correct the problem and re-power on to reboot system.
Error, Check Carriage Sensor or VC Motor	This message indicates that the blade up/down sensor malfunction. Re-power on to re-boot system. If the problem still exists, find a serviceman.
Graph Was Clipped. Data In Buffer	This message indicates that the cutting exceeds the cutting limit. Reload larger media or re-scale the plot to a smaller size; then press the key followed by the display of LCM to continue.

7.2.2 Other operational problems

1. Pinch rollers

Note: Never press the top release grip (the release grip is fully pressed when a clip sound is heard) and pull the bottom release grip at the same time as the pictures shown below. This will prevent you from disabling the pinch roller as the stop bar will not reach the correct position and therefore will not be functioning.

O (CORRECT)

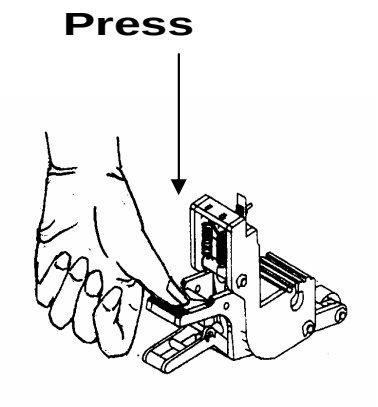

DISABLE

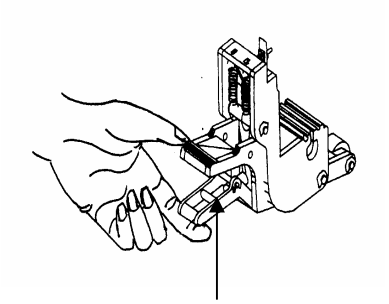

Pull up bottom to release grip

ENABLE

✕ (INCORRECT)

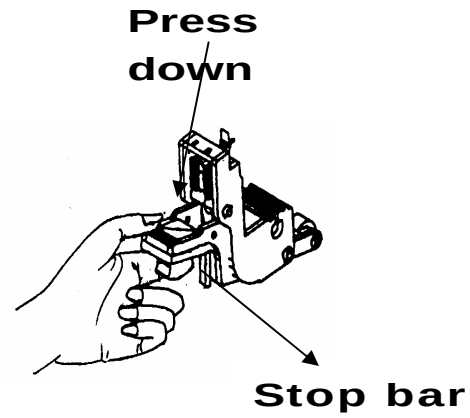

2. Media is rolled up during the cutting process

Adım 1 Turn off the cutting plotter
Adım 2 Move the pinch rollers to the side
Adım 3 Pull the lever up
Adım 4 Trim off the rolled up part of the media
Adım 5 Reload the material

3 The media runs diagonally

Adım 1 Stop the operation
Adım 2 Move the pinch rollers to the side
Adım 3 Pull the lever up
Adım 4 Reload the media and make sure the media is correctly loaded (refer to the alignment ruler).

4. The media lifts

Adım 1 Stop the operation
Adım 2 Move the pinch rollers to the side
Adım 3 Pull the lever up
Adım 4 Reload the sheet and ensure there are two pinch rollers on the very two sides of the sheet.
Adım 5 Ensure the vacuum is on (check the control panel) and increase the number of pinch rollers.

5. The start and end points of the object are shifted

Adım 1 Move the pinch rollers to the side
Adım 2 Pull the lever up
Adım 3 Reload the media and increase the number of pinch rollers.
Adım 4 Activate “Over Cut” in “Tool Select” on the control panel if the above does not work

7.3 Cutting Plotter/Computer Communication Problems

The messages showed below present problems in relation to cutting plotter/computer communication.

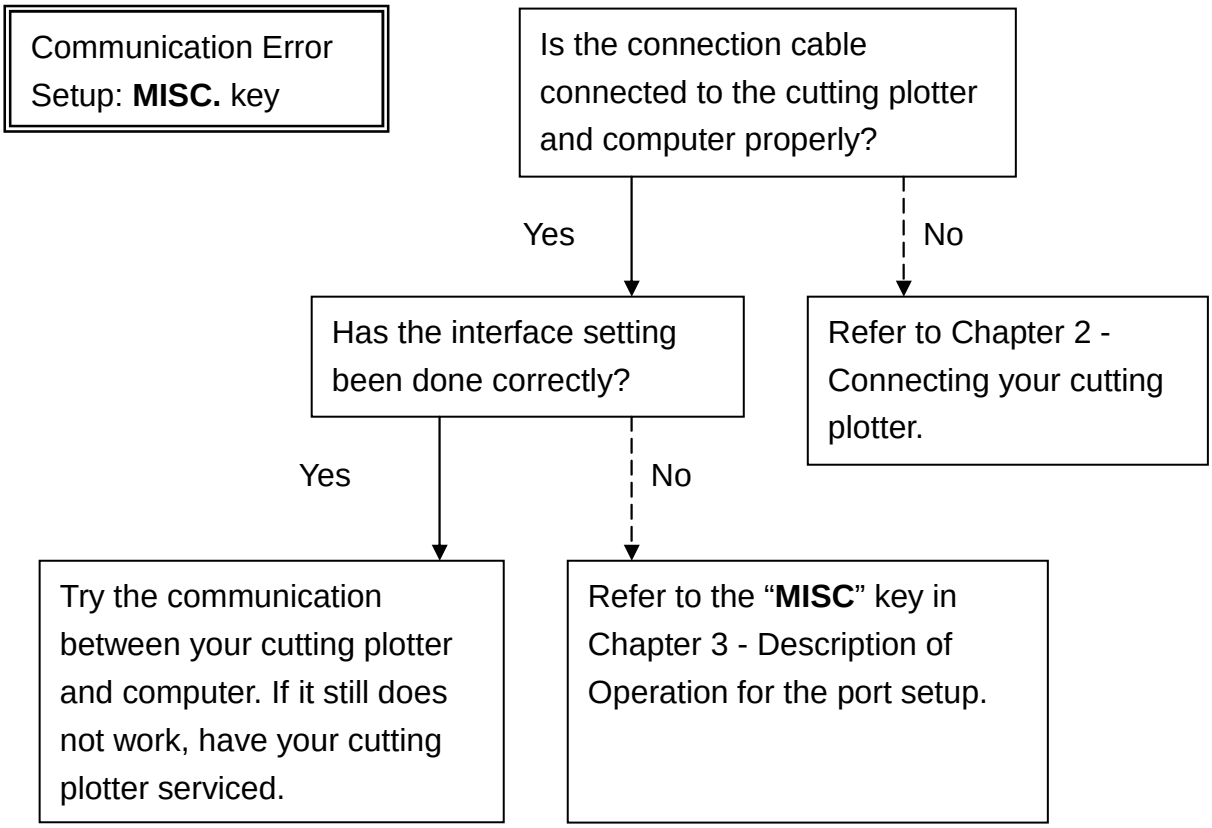
Communication Error
Setup: **MISC.** key
Is the connection cable connected to the cutting plotter and computer properly?
Yes
No
Has the interface setting been done correctly?
Refer to Chapter 2 - Connecting your cutting plotter.
Yes
No
Try the communication between your cutting plotter and computer. If it still does not work, have your cutting plotter serviced.
Refer to the "**MISC**" key in Chapter 3 - Description of Operation for the port setup.

Note:
The computer also needs to set up compatible communication parameters to the cutting plotter set up.

HP-GL/2 Cmd. Error

If your cutting plotter can not recognize the HP-GL/2 or HP-GL commands, please check the HP-GL/2 or HP-GL commands applied to your cutting plotter are used properly.

7.4 Software Problems

Check the following first:

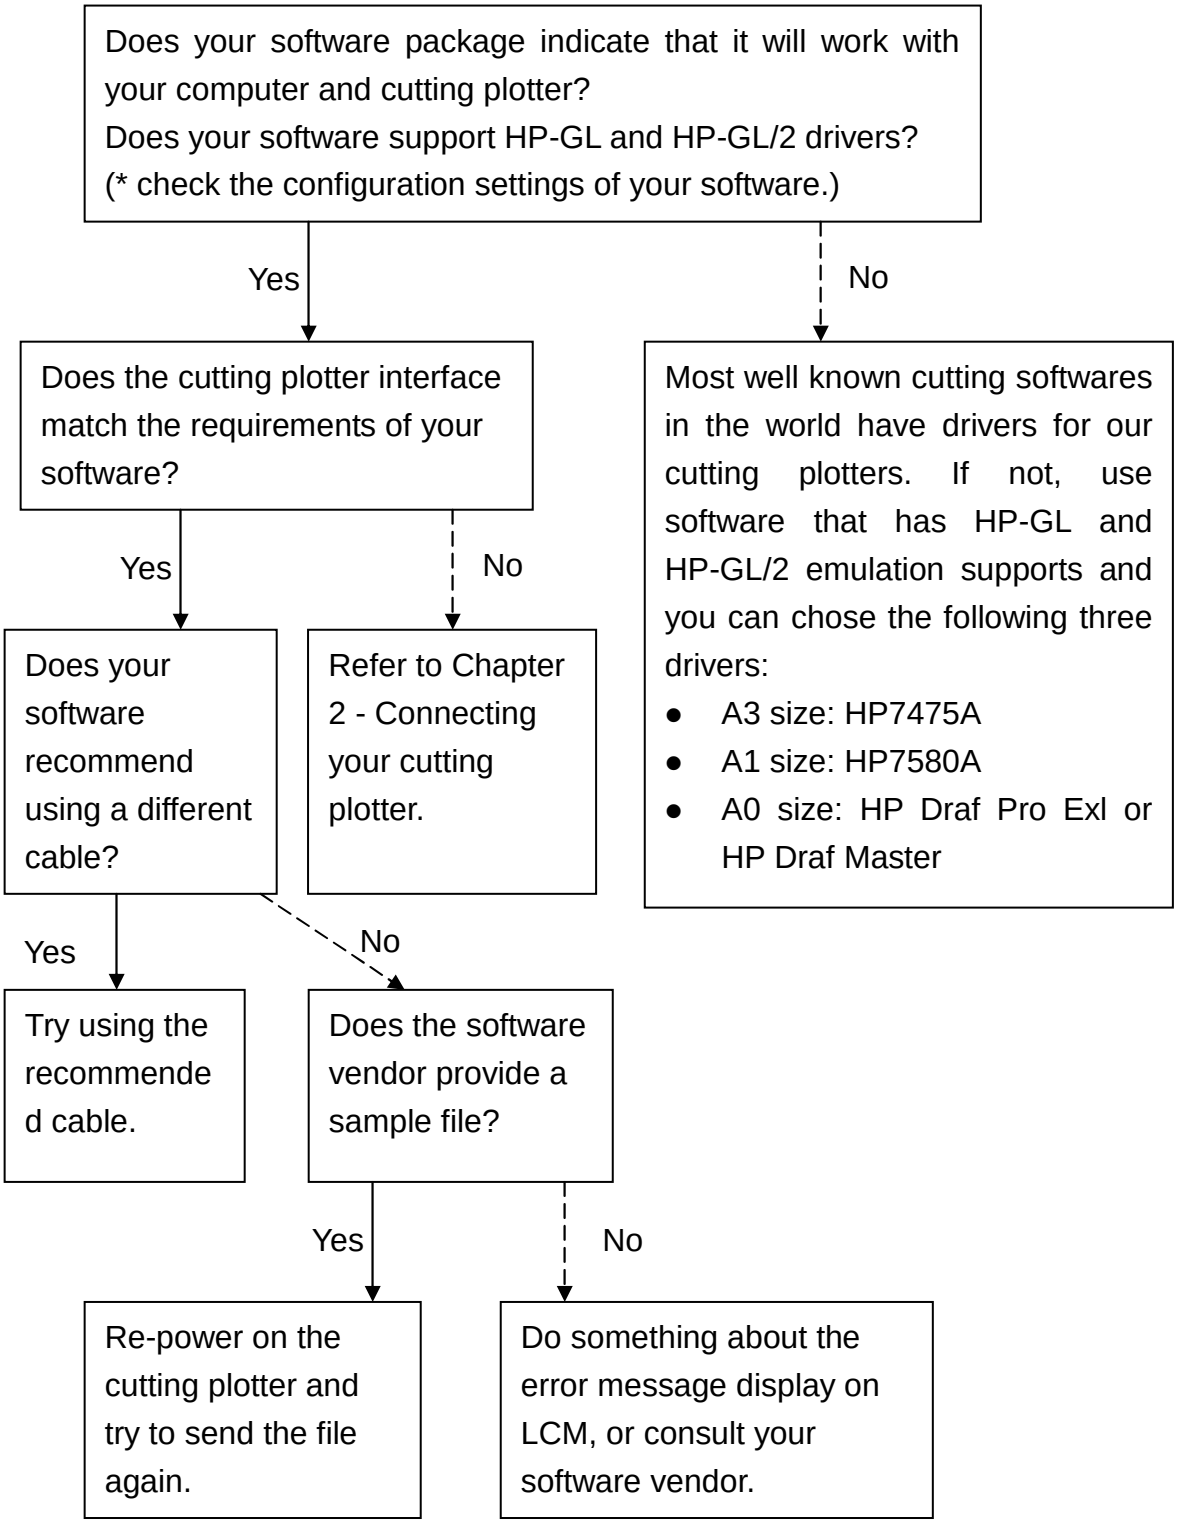
Does your software package indicate that it will work with your computer and cutting plotter?
Does your software support HP-GL and HP-GL/2 drivers?
(* check the configuration settings of your software.)
Yes
No
Does the cutting plotter interface match the requirements of your software?
Most well known cutting softwares in the world have drivers for our cutting plotters. If not, use software that has HP-GL and HP-GL/2 emulation supports and you can chose the following three drivers:
A3 size: HP7475A
A1 size: HP7580A
A0 size: HP Draf Pro Exl or HP Draf Master
Yes
No
Does your software recommend using a different cable?
Refer to Chapter 2 - Connecting your cutting plotter.
Yes
No
Try using the recommende d cable.
Does the software vendor provide a sample file?
Yes
No
Re-power on the cutting plotter and try to send the file again.
Do something about the error message display on LCM, or consult your software vendor.

7.5 Cutting Quality Problems

Note: The daily maintenance of your cutting plotter is very important. Be sure to clean up the grid drum and pinch rollers regularly for better cutting accuracy and output quality.

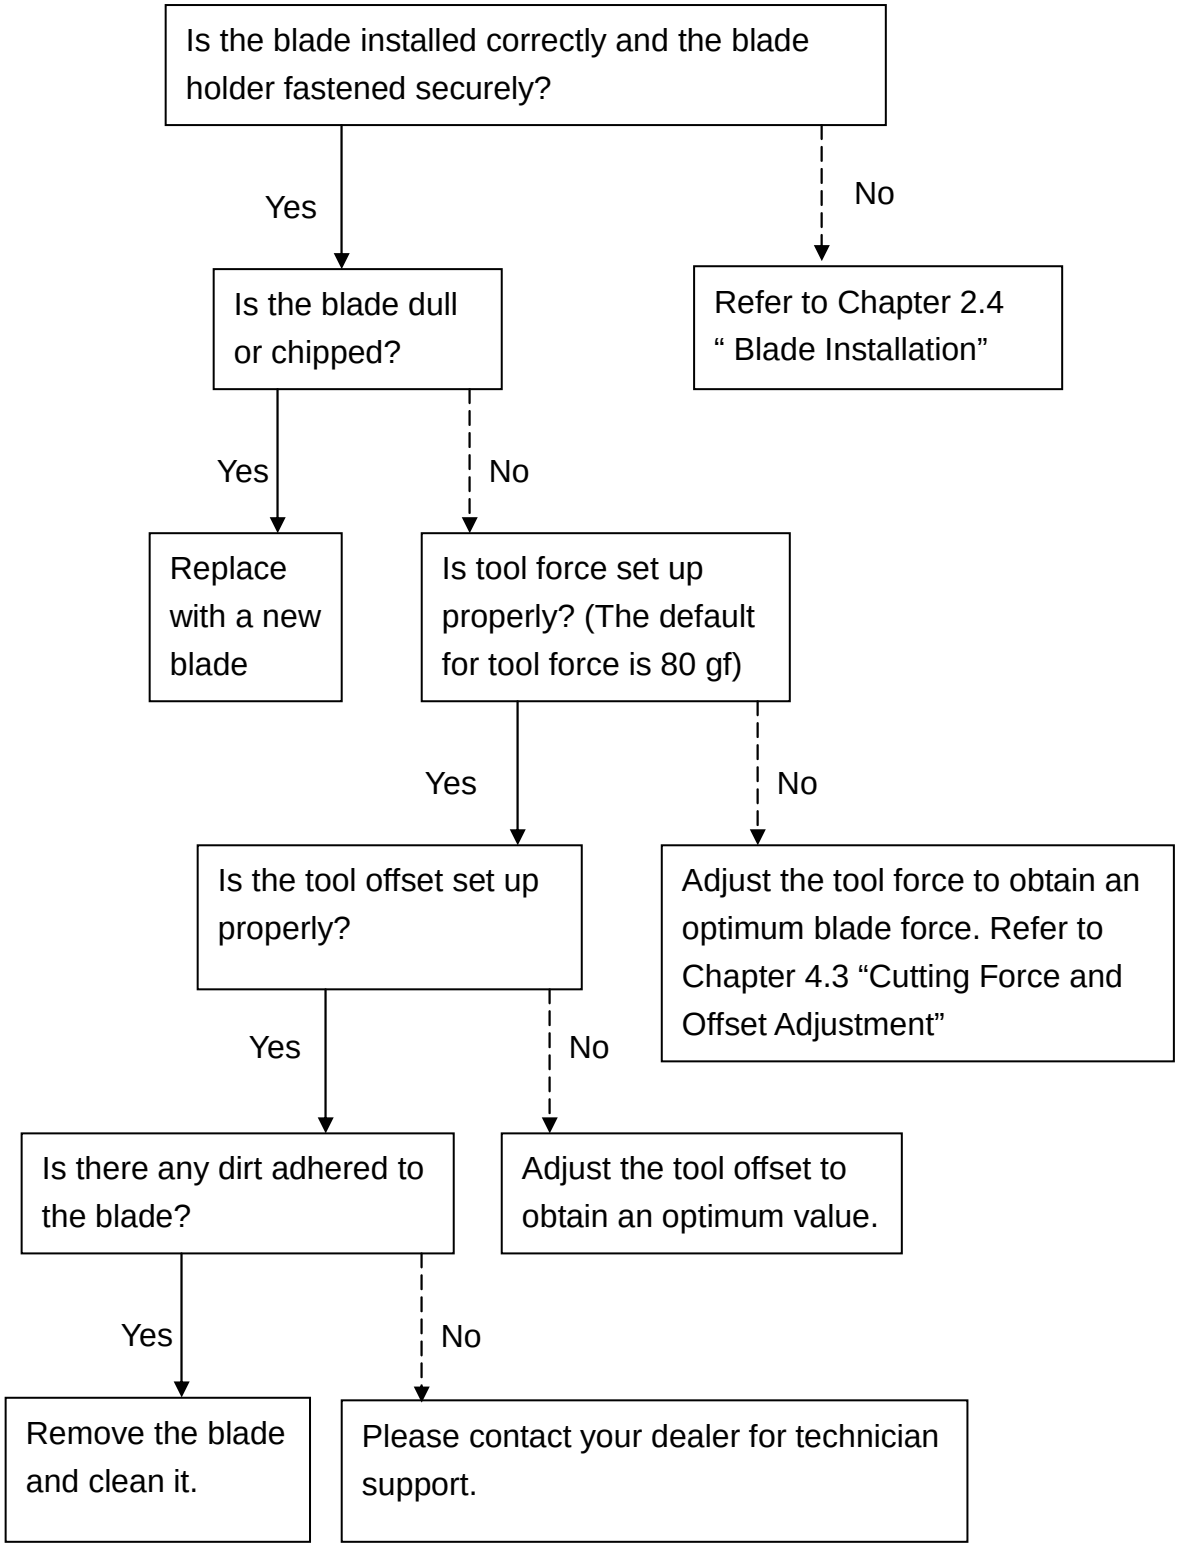
Is the blade installed correctly and the blade holder fastened securely?
Yes
No
Is the blade dull or chipped?
Refer to Chapter 2.4 “ Blade Installation”
Yes
No
Replace with a new blade
Is tool force set up properly? (The default for tool force is 80 gf)
Yes
No
Is the tool offset set up properly?
Adjust the tool force to obtain an optimum blade force. Refer to Chapter 4.3 “Cutting Force and Offset Adjustment”
Yes
No
Is there any dirt adhered to the blade?
Adjust the tool offset to obtain an optimum value.
Yes
No
Remove the blade and clean it.
Please contact your dealer for technician support.

ValueCut Specification

Model Number		VC-600	VC-1300	VC-1800
Operational Method		Roller-Type		
Max. Cutting Width		610mm (24in)	1320mm (52in)	1830mm(72in)
Max. Cutting Length		50m (164ft)		
Max. Media Loading Width		770mm (30.3in)	1594mm(62.7in)	1900mm(74.8in)
Min. Media Loading Width		50mm (1.97in)		300mm (11.8in)
Number of Pinch Rollers		3	4	6
Acceptable Material Thickness		0.8mm (0.03in)		
Drive Motor		DC Servo Control		
Cutting Force		5~600 g		
Max. Cutting Speed		1530 mm/sec (60ips / Diagonal)		
Acceleration		4.2 G (gravity)		
Offset		0~1.0 mm (with an increase of 0.025mm)		
Memory Buffer		4 MB		
Interfaces		USB 2.0 (Full Speed)l and Serial (RS-232C)		
Type of Command		HP-GL, HP-GL/2		
Mechanical Resolution		0.006mm		
Software Resolution		0.025 mm		
Distance Accuracy		±0.254 mm or ±0.1% of move, whichever is greater		
Repeatability		±0.1mm		
Curve & Arc Smoothing		Yes		
Configurable Origin		Yes		
Test Cut capability		Yes		
Tangential		Yes		
Repeat		Yes		
Copy		Yes		
Pouncing		Yes		
Control Panel		LCD (20 digits x 2 lines), 14 Keys, 1 Power LED		
Power Supply		AC 100-240V, 50/60 Hz (auto switching)		
Power Consumption		251.8 watts		
Dimension (HxWxD) mm		414 * 930 * 490	1166 * 1754 * 667	750 * 2170 * 1160
(HxWxD) in		16.3 * 36.6 * 19.2	45.9 * 69.1 * 26.3	29.5 * 85.4 * 45.7
Net Weight		18 kg	50 kg	64 kg
Stand		Optional	Standard	
Automatic Aligning System		Completely Automatic Contour Cutting System for print to cut solution		
Media Basket		Optional	Standard	
Operation Environment	Temperature	15℃~30℃/ 60℉~86℉		
	Humidity	25% ~ 75%		

- Compatible with Windows 2000/XP/7/Vista.
- The specification and data sheet may vary with different materials used. In order to obtain the best output quality, please maintain the machine regularly and properly.
- Mutoh reserves the right to change the specifications at any time without notice.
- The above listed specification values are effective only when operated with media certified by Mutoh.

Blade Specification

For cutting thick fluorescent and reflective vinyl. Also for cutting detailed work in standard vinyl.

The blade is 45°with **Red Cap**(5-unit package), 0.25 mm offset

For cutting reflective vinyl, cardboard, sandblast, flock, and stencil sharp edge.

The blade is 60°with **Green Cap**, 0.50 mm blade offset

For cutting thin sandblast mask and stencil with friction feed or sprocket feed machine.

The blade is 60°with **Blue Cap**, 0.25 mm blade offset

For Cutting small text and fine detail. Sharp blade with smallest offset.

The blade is 0.175 mm blade offset with **Black Cap**

For thin and delicate media such as window tint

The blade is 25°with **Yellow Cap**, 0.25 mm blade offset

About the Tool

A generic term referring to the blade that cuts the sheet, the pen that does plotting, and the LED bombsight (option) used for pointing to the reference point.
OFFSET is the distance that the blade tip is displaced from the centerline of the blade.

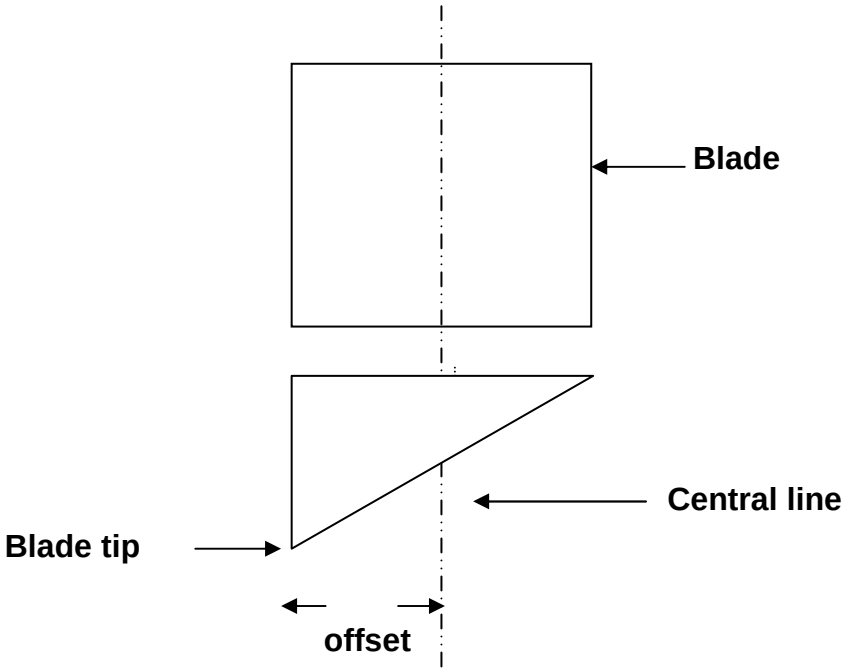

Protrusion Length of the Blade

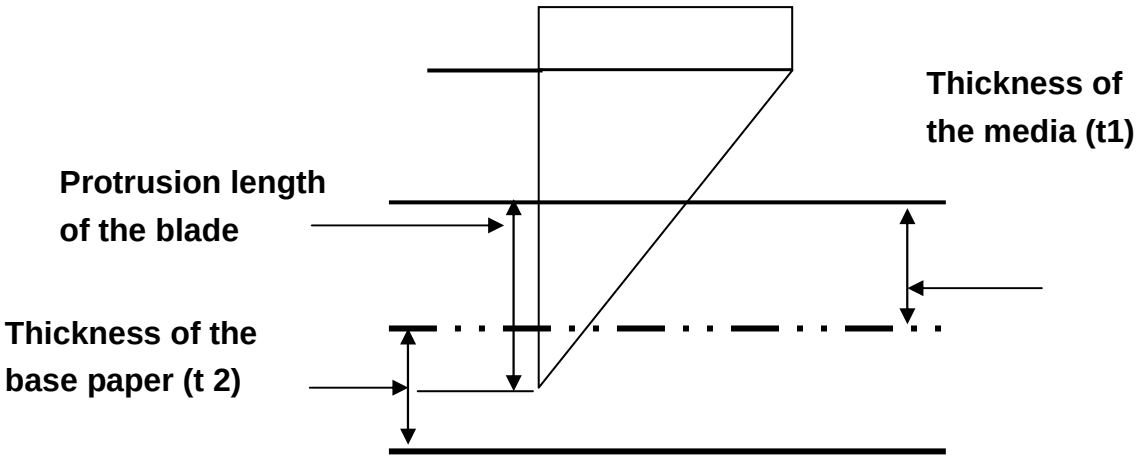

Length of protrusion = t1 + t 2/ 2, but for your convenience you may just make it about 0.3mm ~ 0.5mm beyond the blade holder tip.

Consumable and Optional Item List

Consumable Items

Part Number	Item Name
VC-CHD	Cutting Blade Holder
VC-CBRE5	Cutting Blade Red Cap (45°0.25) (5pcs/box)
VC-CBGR1	Cutting Blade Green Cap (60°0.5) (1pcs/box)
VC-CBBU1	Cutting Blade Blue Cap (60°0.25)(1pcs/box)
VC-CBBK1	Cutting Blade Black Cap (42°0.175)(1pcs/box)
VC-CBYE5	Cutting Blade Yellow Cap (25°0.25)(5pcs/box)
PSGB-BK	Pressurized Ballpoint Pen
VC-CMAT	Cutting Pad (W6mm*L10m)
VC-PT	Pouncing Tool assembly (Diameter: 1.5mm)
VC-PMAT	Pouncing Pad(L=1.5m)
VC-TW	Tweezers(L=11cm W=0.85cm)
VC-SB	Safe Blade

Optional Items

Part Number	Item Name
VC-STD600	Stand for VC-600 (with Basket)
VC-TBL	Add-on flat table for VC-600
VC-RS	RS-232 Cable (25 pin)
VC-USB	USB Cable

CorelDRAW Plug-In Instruction

AASII VBA Installer is applicable for CorelDRAW Version 11, 12, 13, 14, 15, 16.

Installation

1. Check the “AAS CorelDraw Installer” folder in ValueCut Installation CD, and double click the “AASIIInstaller.exe” file to run the installation program.

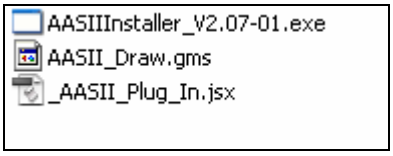

2. Press the “Install” button to begin installing AASII CorelDRAW VBA.

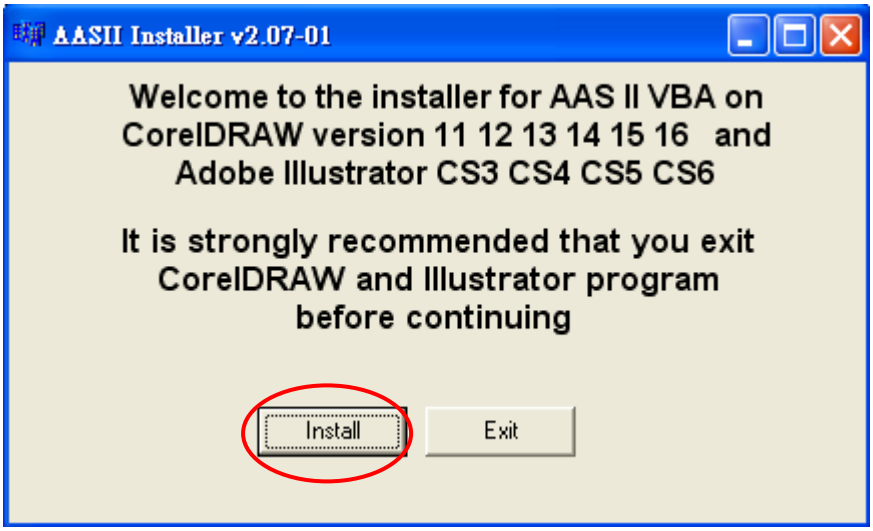
AASII Installer v2.07-01
Welcome to the installer for AAS II VBA on
CorelDRAW version 11 12 13 14 15 16 and
Adobe Illustrator CS3 CS4 CS5 CS6
It is strongly recommended that you exit
CorelDRAW and Illustrator program
before continuing
Install
Exit

User Instructions

1. Run CorelDRAW to edit your graphics and select all images at once when you wish to plot.

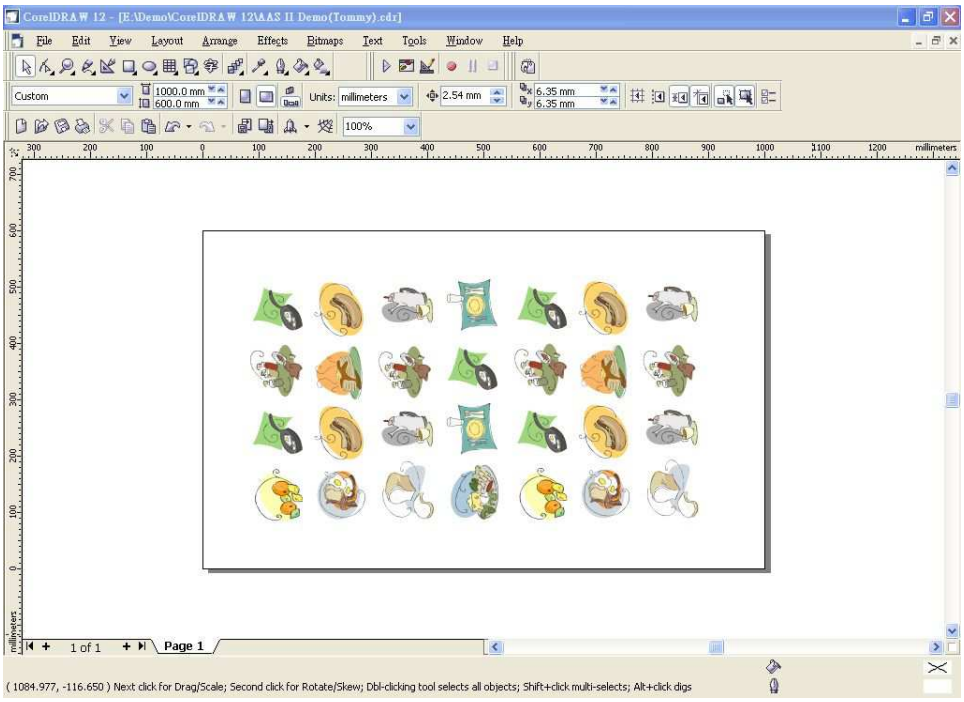
CorelDRAW 12 - [E:\Demo\CorelDRAW 12\AAS II Demo(Tommy).cdr]
File Edit View Layout Arrange Effects Bitmaps Text Tools Window Help
Page 1

2. Select “Tools→Visual Basic→Play”.

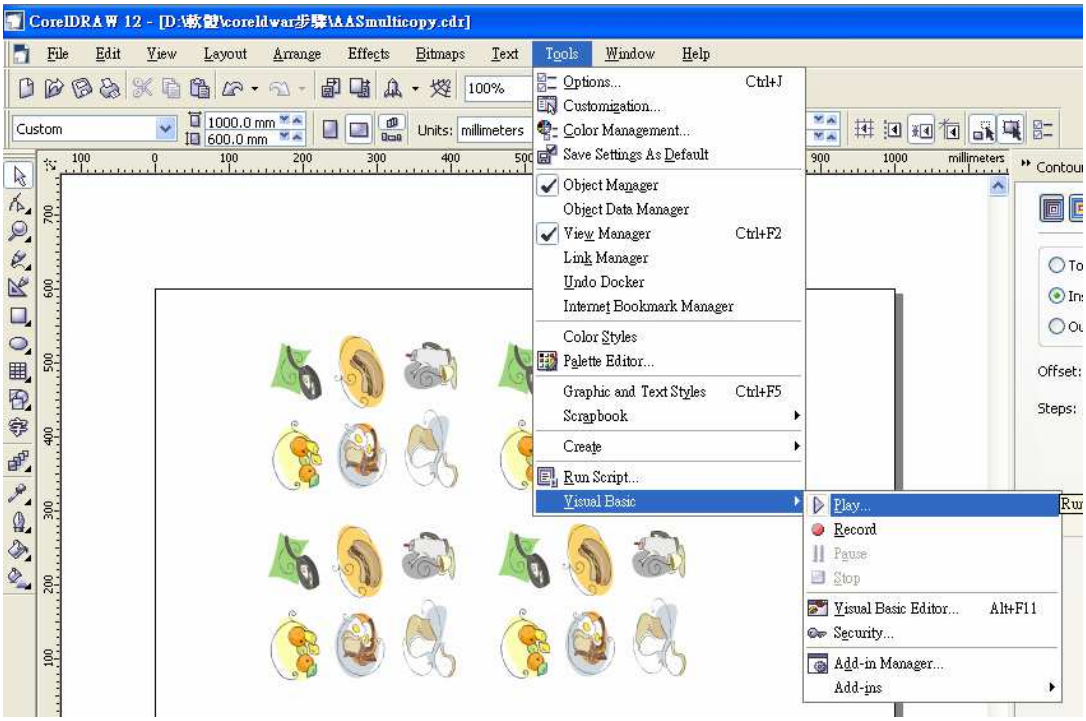

The Visual Basic for Applications Marcos window will pop up.
Select Global Macros(AASII_Draw.gms) under the “Macros in” manual, and press “Run”.

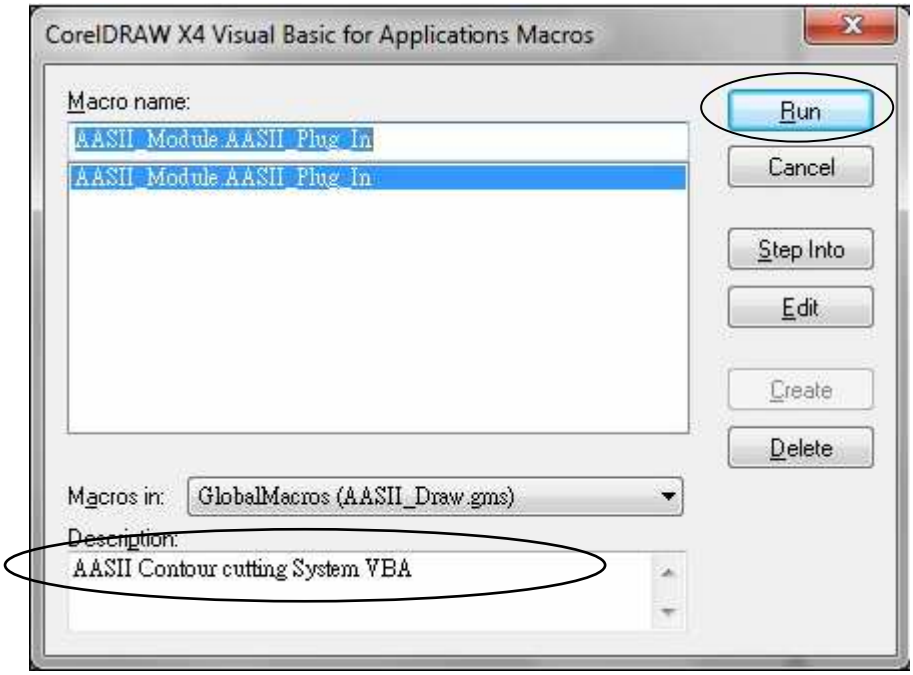

3. Click on “Apply” and select whether you would like to add the registration marks by page size or by object.

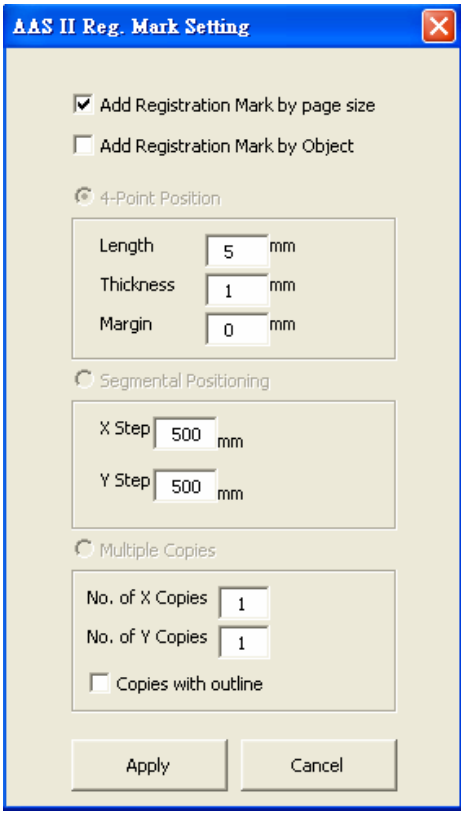

Note:
Note: “Add Registration Mark by Object” will be the default selection if you click on the image whereas “Add Registration Mark by page size” will be the default one when the blank area on the page is clicked.

4. Now you can print out the image file with registration marks.

Add Registration Mark by page size

If you tick “Add Registration Mark by page size” as shown in the Şekil below and click “Apply”, your registration marks will be created automatically.

Note:
The length setting will be in the range of 5-25mm according to your page size.
Please DO NOT make any changes to the “Origin” section when you choose to add registration marks by page size as indicated below otherwise the position of the marks will be changed.

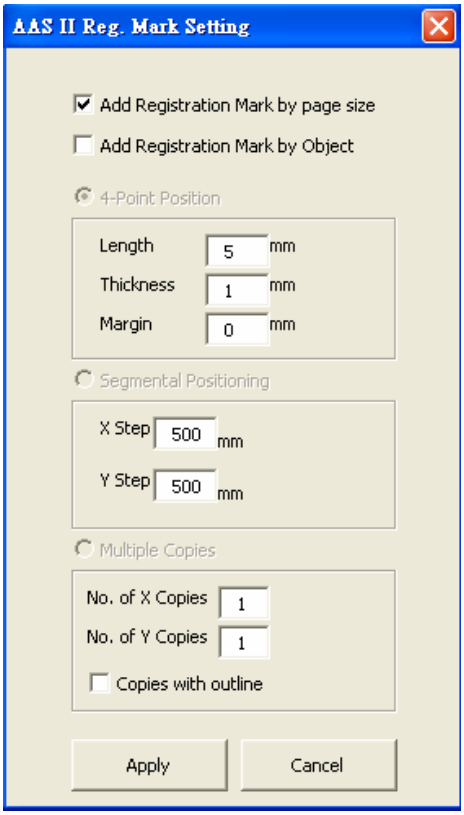

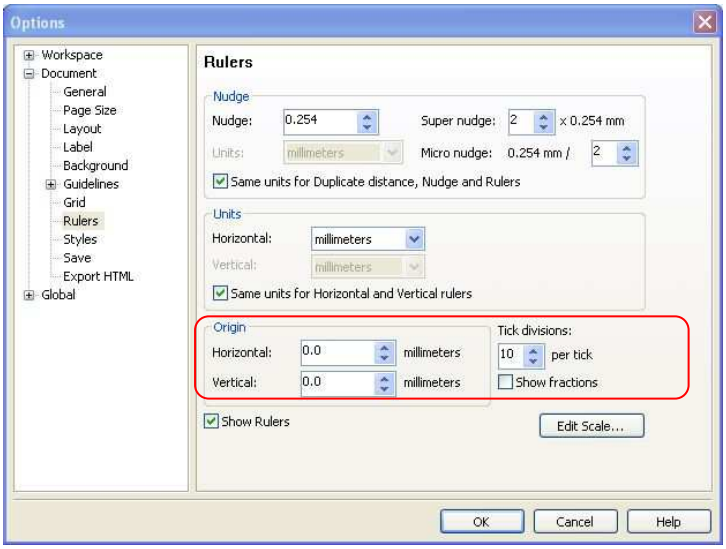

The system will create the 4 marks on the 4 corners of the page as shown in the picture below wherever you move your image.

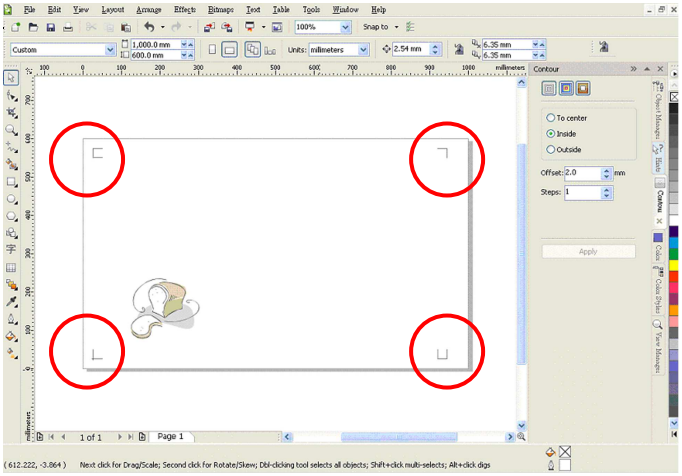

Add Registration Mark by Object

If you tick “Add Registration Mark by Object”, you will be offered three options of registration marks as shown below.

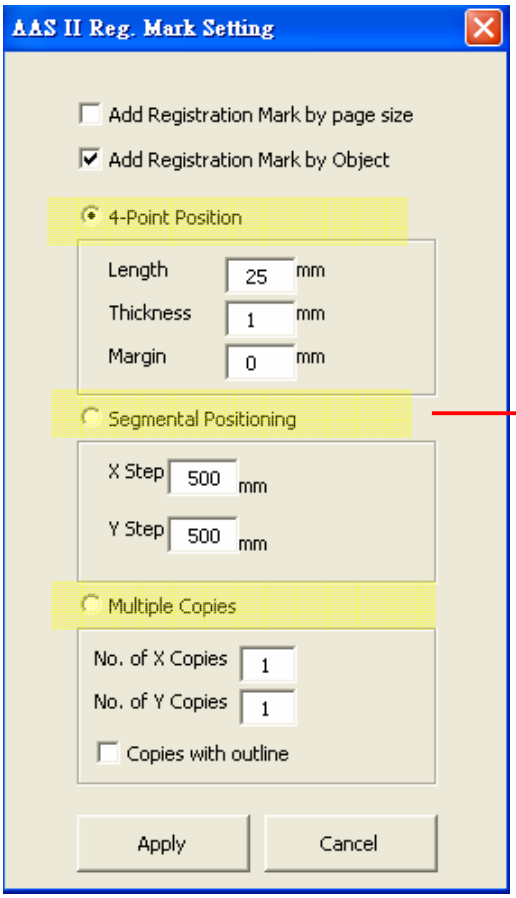

4-Point Positioning

- Length: The length of marks
  → Range: 5mm~50mm
  → Optimized Setting: 25mm
- Thickness: The line thickness of marks
  → Range: 1mm~2mm
  → Optimized Setting: 1mm
- Margin: The distance between marks and images
  → Range: 0mm~50mm
  → Optimized Setting: 5mm

Segmental Positioning

- X Adım: The distance of intermediate position on the X axis
- Y Adım: The distance of intermediate position on the Y axis
  → Range: 200mm~600mm
  → Optimized Setting: Less than 500mm

Multiple Copies

- No. of X Copies: The numbers of copies on X axis
- No. of Y Copies: The numbers of copies on Y axis
  → Range: 1~50. (The more copies you make, the more time is needed for data transmission.)
  → Numbers of X Copies * Numbers of Y Copies = The total amount of image copies
- Copies with outline：To show outlines of image graphics

Note:
The values entered in the “4-Point Positioning” section (length, thickness and margin) will still be applied when you tick “Segmental Positioning” or “Multiple Copies”.

4-Point Positioning

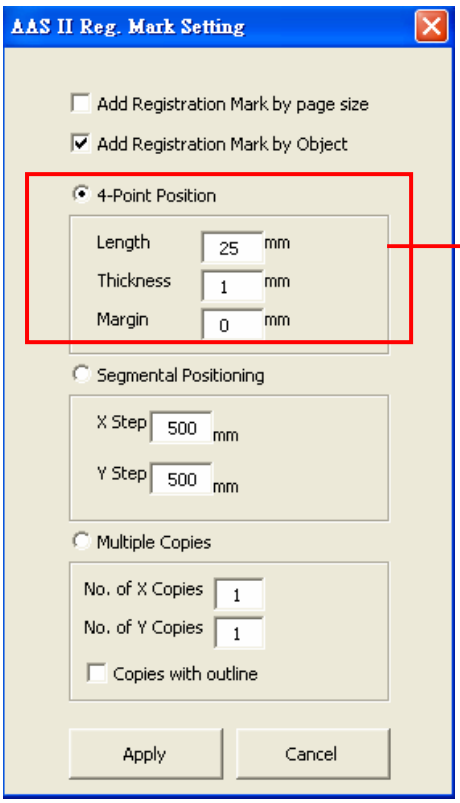

4-Point Positioning

- Length: The length of marks
  - → Range: 5mm~50mm
  - → Optimized Setting: 25mm
- Thickness: The line thickness of marks
  - → Range: 1mm~2mm
  - → Optimized Setting: 1mm
- Margin: The distance between marks and images
  - → Range: 0mm~50mm
  - → Optimized Setting: 5mm

The system will create the 4 marks as shown in the picture below.

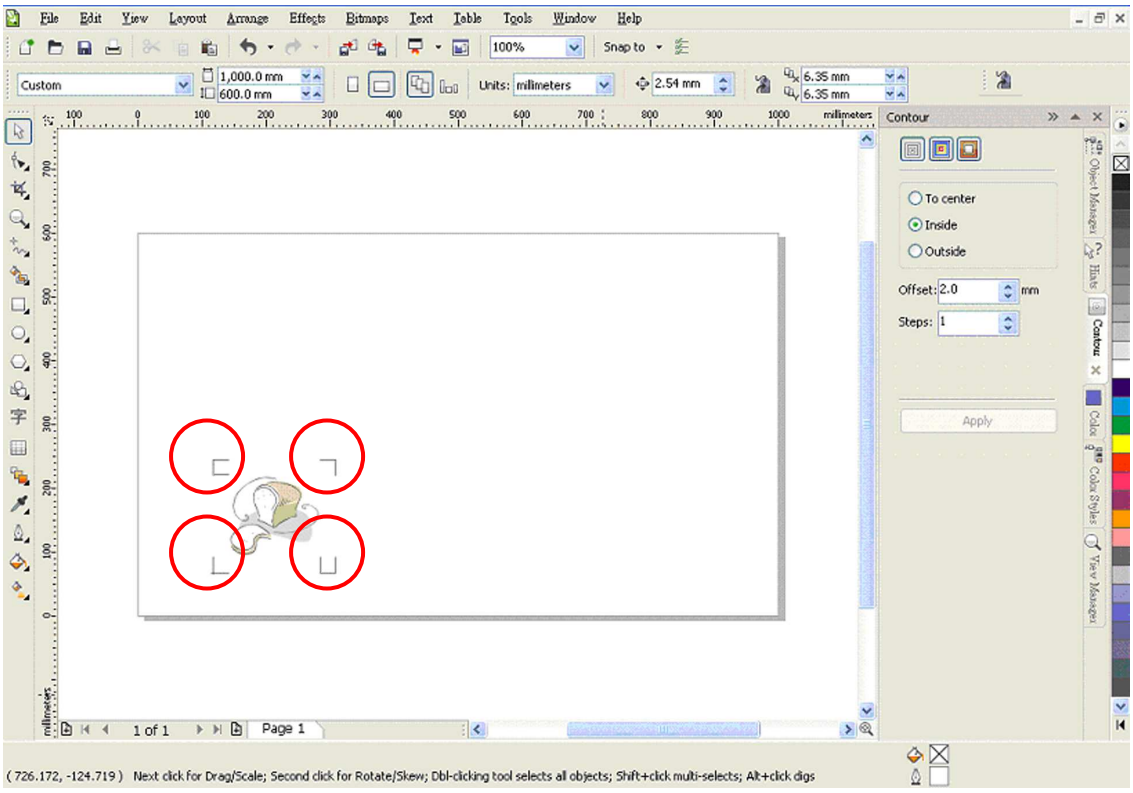
File Edit View Layout Arrange Effects Bitmaps Text Table Tools Window Help
Contour
To center
Inside
Outside
Offset: 2.0 mm
Steps: 1
Apply
1 of 1
Page 1
(726.172, -124.719) Next click for Drag/Scale; Second click for Rotate/Skew; Dbl-clicking tool selects all objects; Shift+click multi-selects; Alt+click digs

Note:
The values entered in the “4-Point Positioning” section (length, thickness and margin) will still be applied when you tick “Segmental Positioning” or “Multiple Copies”.

1. To save your materials, in addition to amending object margins, you can also adjust the length of the registration marks (5mm minimum) when you apply 4-Point Positioning (see table 1 for suggestions based on different material sizes). The smaller the size is, the smaller the distance between the object and the registration marks is (see the Şekils below).

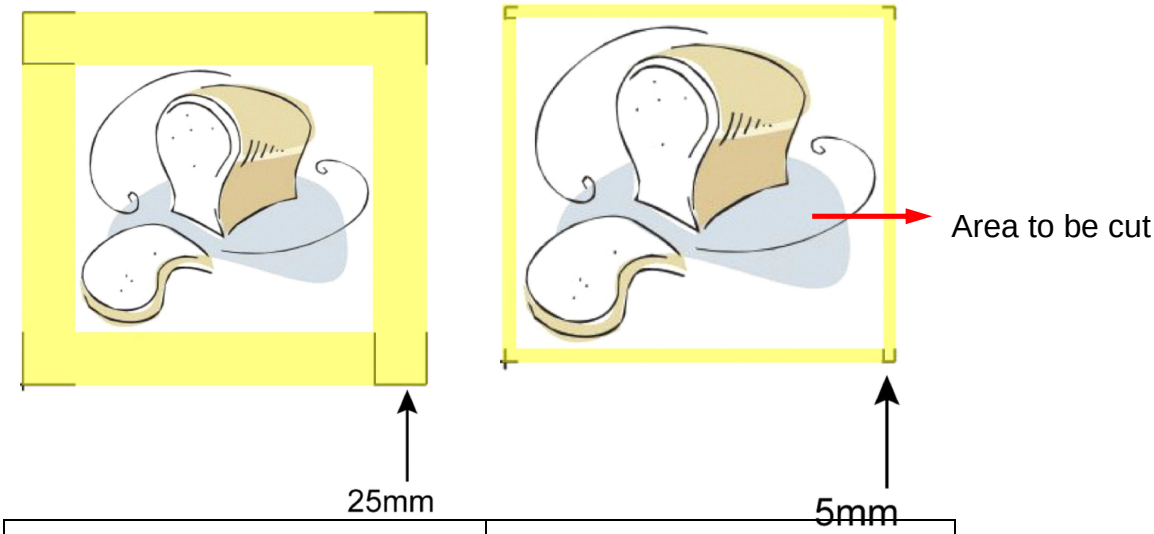

Page size (unit: inch)	Suggested mark length (unit: mm)
A6 (4.13 × 5.83)	5
A5 (5.83 × 8.27)	8
A4 (8.27 × 11.69)	11
A3 (11.69 × 16.54)	16
A2 (16.54 × 23.39)	23
A1 (23.39 × 33.11) and above	25*

Table 1

*25mm is the suggested value for the registration mark length

2. The size of the registration marks would affect the accuracy of registration mark detection so please make sure the amount you enter is reasonable.

3. If you change the paper size, you will have to reset the registration marks otherwise the previous setting will be applied.

Segmental Positioning

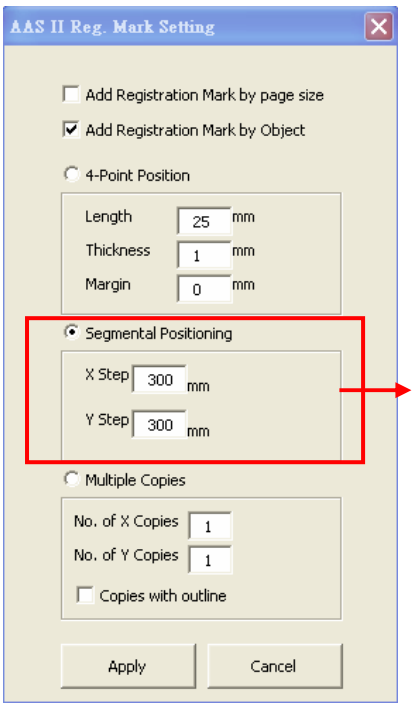

For precise cutting quality, it is suggested to select “Segmental Positioning” when you are working on an extra long or large-sized image to increase cutting accuracy.

Segmental Positioning

- X Adım: The distance of intermediate position on the X axis
- Y Adım: The distance of intermediate position on the Y axis
  → Range: 200mm~600mm
  → Optimized Setting: Less than 500mm

The system will create the marks as shown in the picture below.

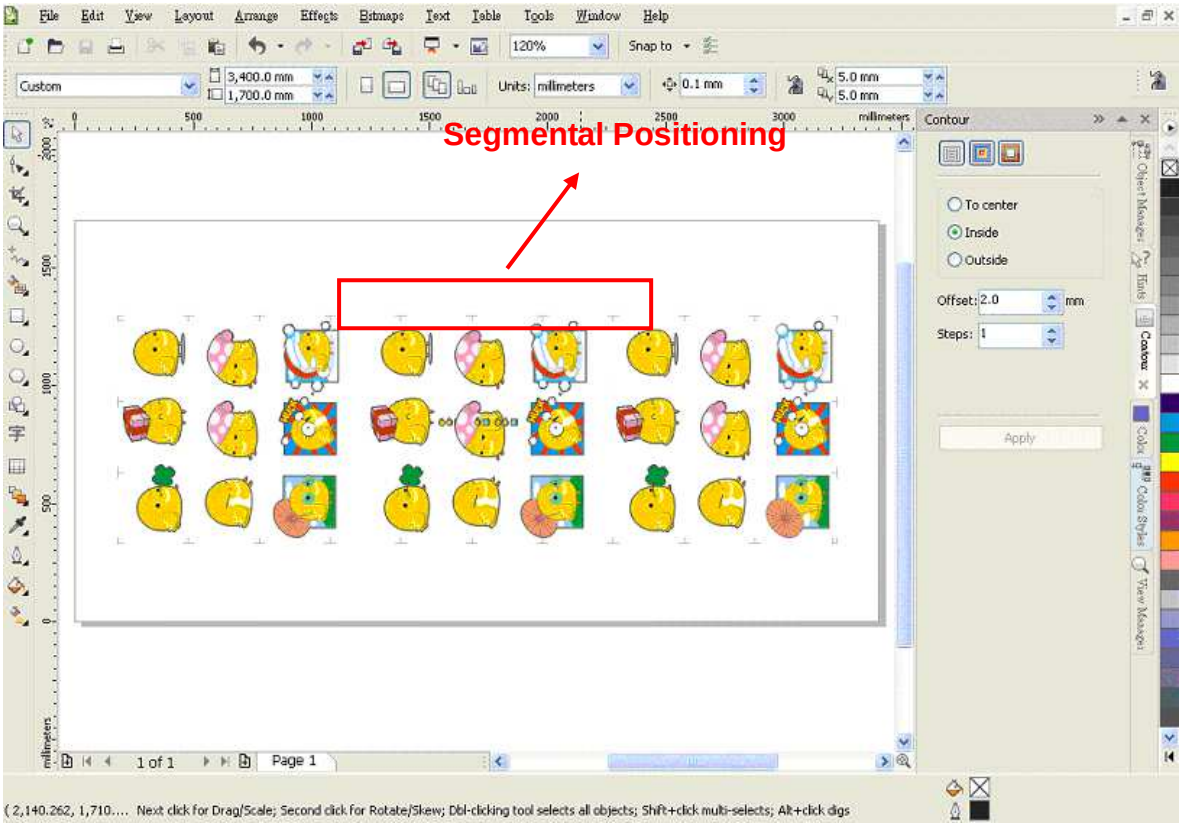

Multiple Copies

It is suggested to select “Multiple Copies” when you would like to make several copies of one image on your material to increase cutting accuracy.

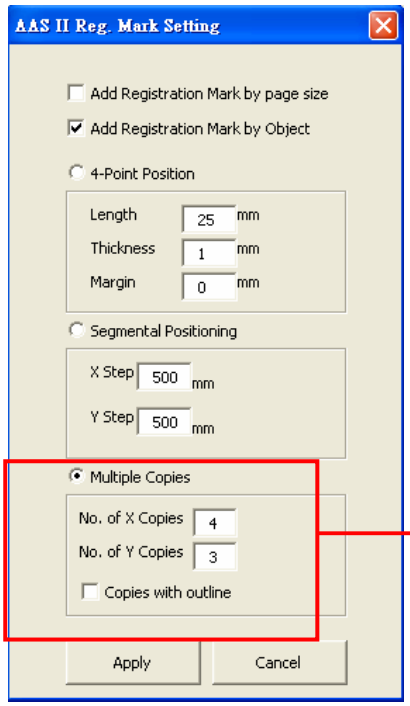

Multiple Copies

- No. of X Copies: The numbers of copies on X axis
- No. of Y Copies: The numbers of copies on Y axis

  → Range: 1~50. (The more copies you make, the more time is needed for data transmission.)

  → Numbers of X Copies * Numbers of Y Copies = The total amount of image copies
- Copies with outline：To show outlines of image graphics

The system will create the as shown in the picture below.

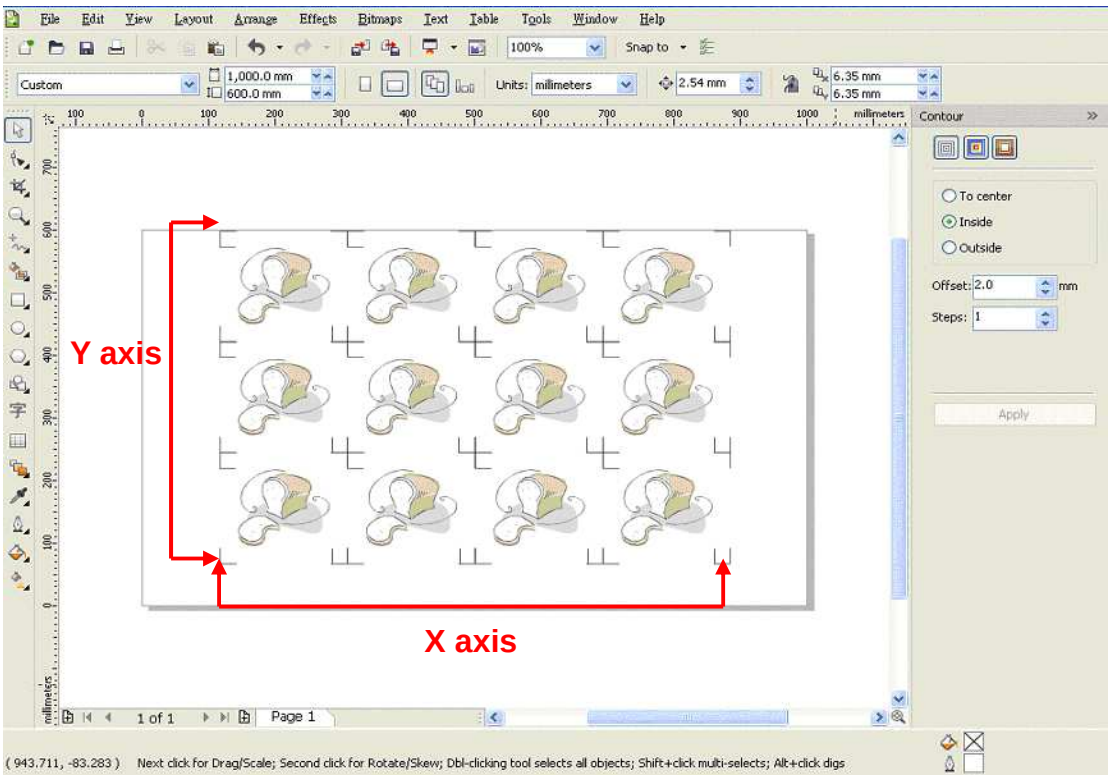

Segmental Positioning will be applied to Multiple Copies when the object to be copied is of large size (with the length or width over 200mm) to increase the accuracy of registration mark detection.

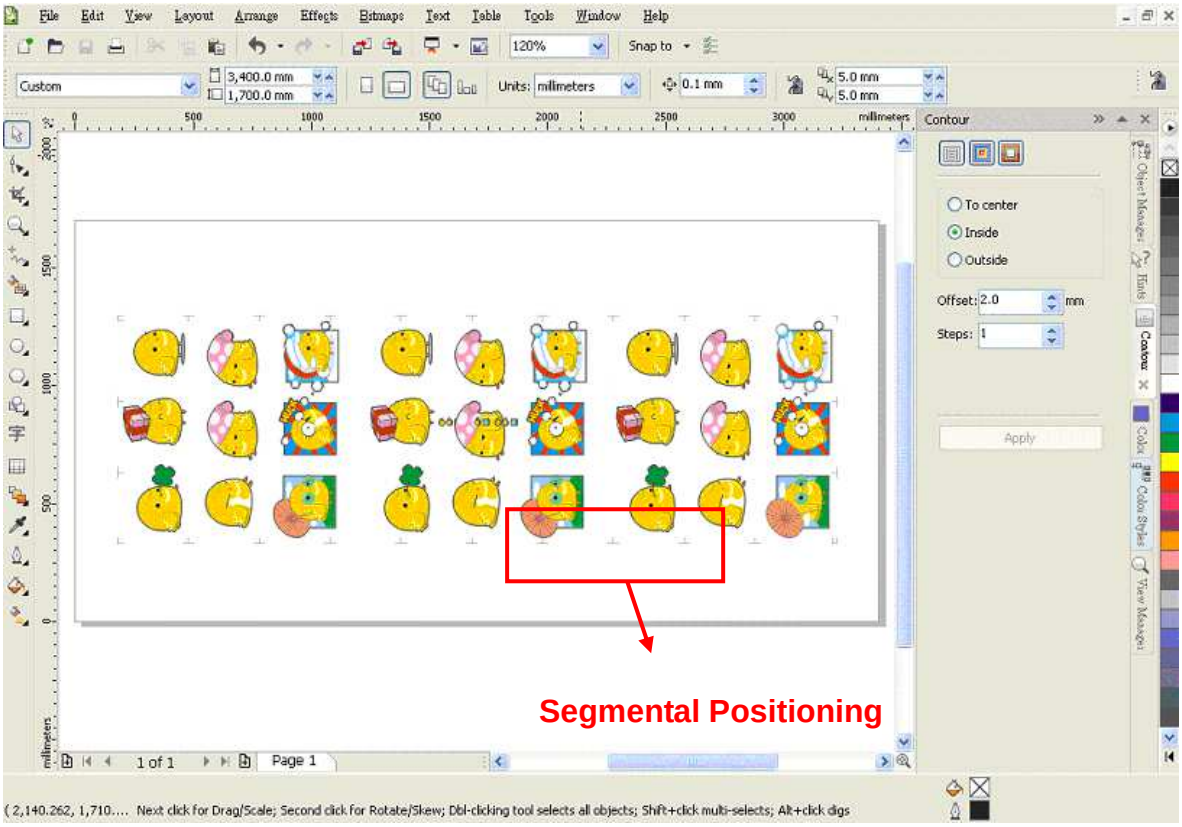

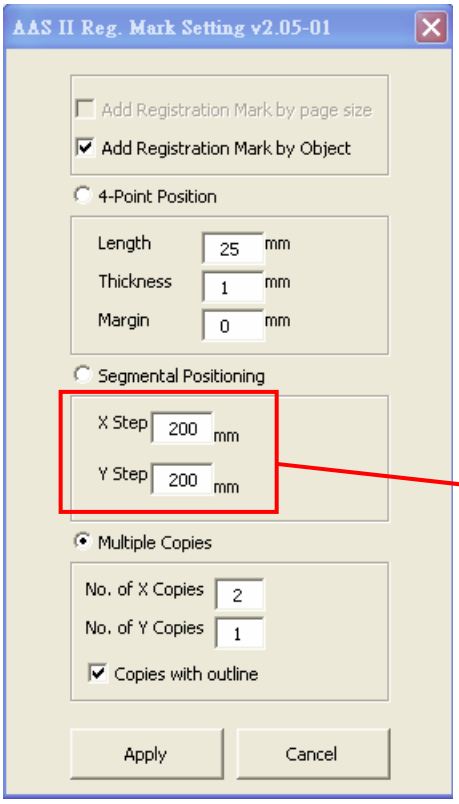

Please make sure you are happy with the settings for Segmental Positioning as these will be applied to the copies created.

Contour cutting through CorelDraw

Adım 1: Position the paper with registration marks printed by your printer on the cutter.

Adım 2: Select “Files→Print”.

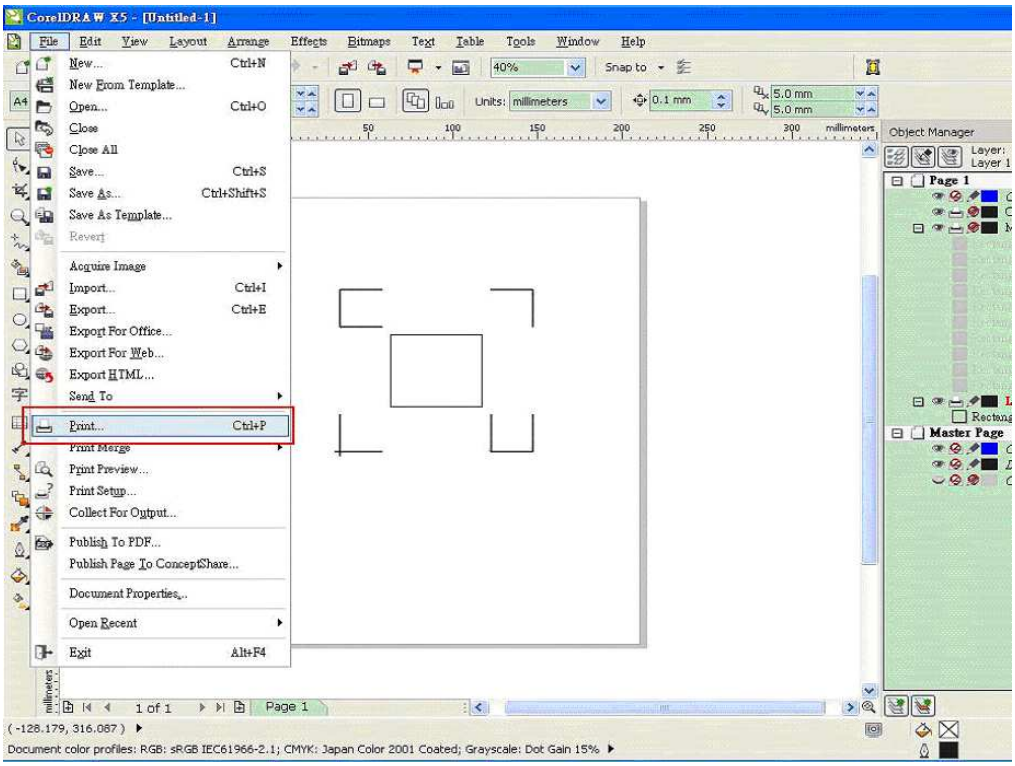

Please note that if you use CorelDraw X5, you must follow the steps below.

Click the “color” page and go to the “Color conversions performed by:” and then select the model name of you cutter.

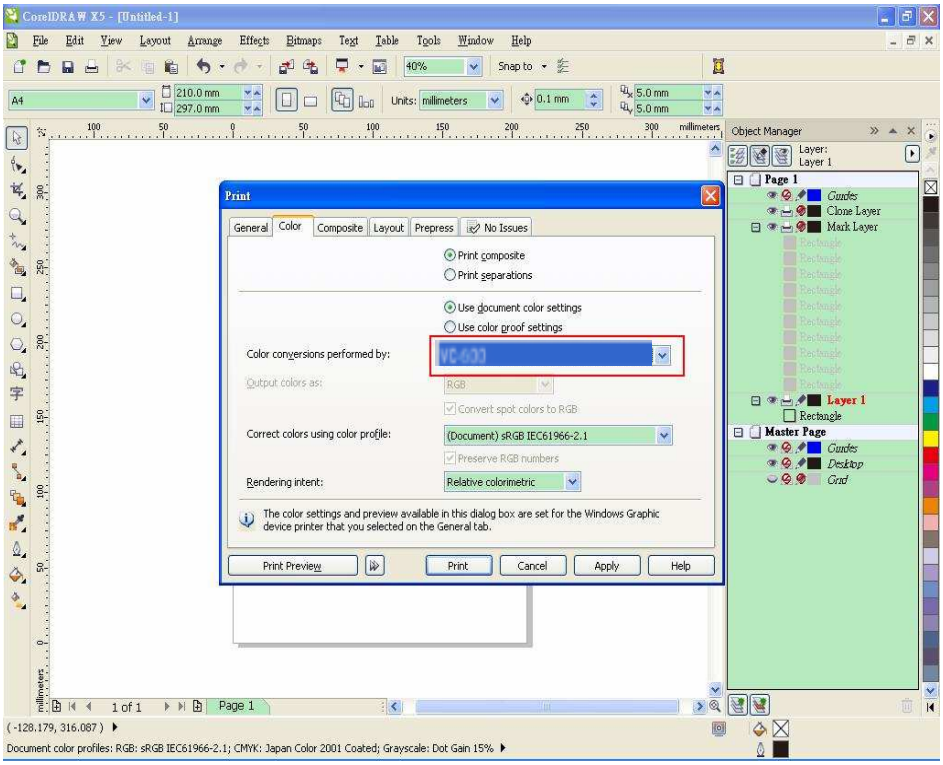

Adım 2: Go to the “Layout” page and select Bottom left corner at “Reposition images to”.

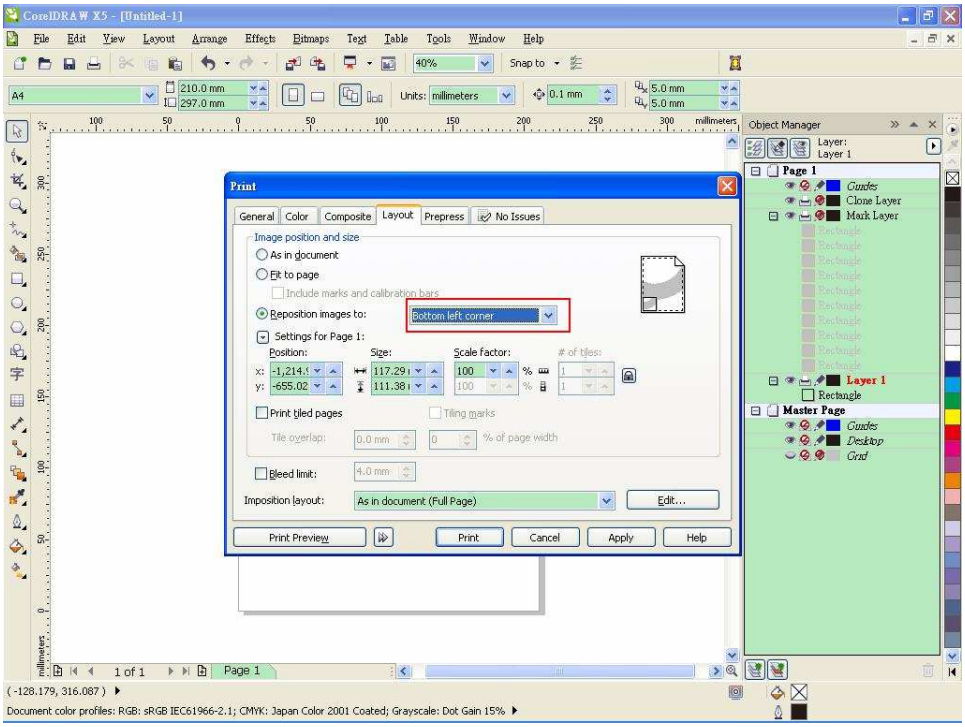

Adım 3: Click “Print”.

<u>You can also add a Hot Icon for the AAS II Plug-in</u>

Adım 1: Select “Tools→Customization→Commands→Macros”.

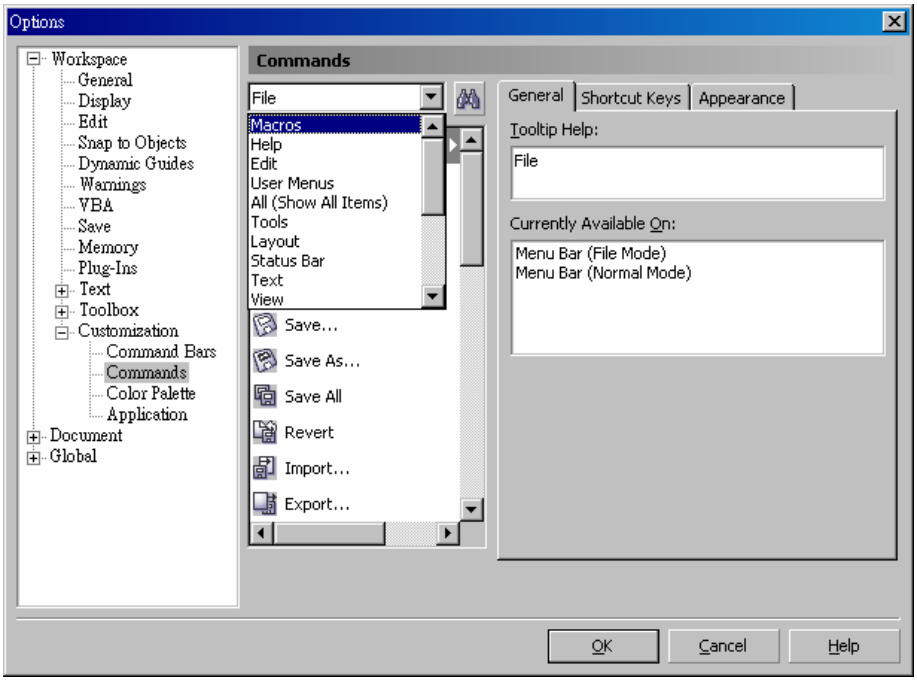

Adım 2: Choose【_CorelDraw_AASII.Module._AASII】and drag it to the “commands” bar.

Adım 3: If you want to have a different icon, select “Tools→Customization→Commands→ Appearance” to import a graphics for use as the icon. Choose an icon and press OK to complete this setting.

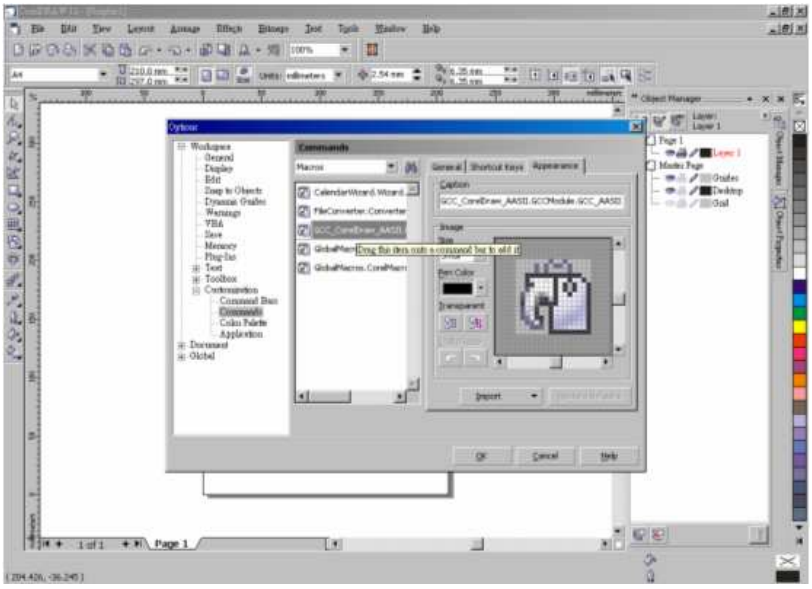

Illustrator Plug-In Instruction

AASII VBA Installer is applicable for Illustrator Version CS3, CS4, CS5, CS6.

Installation

1. Check the “AAS Illustrator Installer” folder in ValueCut Installation CD, and double click the “AASIIInstaller.exe” file to run the installation program.

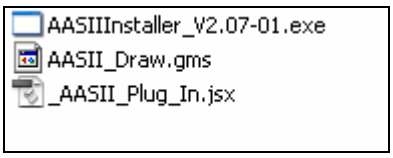

2. Press the “Install” button to begin installing AASII Illustrator VBA.

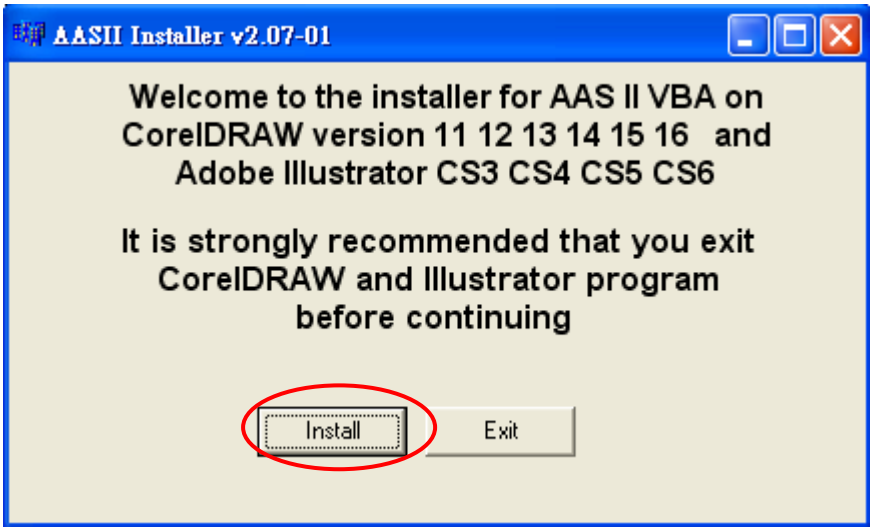
AASII Installer v2.07-01
Welcome to the installer for AAS II VBA on CorelDRAW version 11 12 13 14 15 16 and Adobe Illustrator CS3 CS4 CS5 CS6
It is strongly recommended that you exit CorelDRAW and Illustrator program before continuing
Install
Exit

User Instructions

1) Open Illustrator.

2) Edit your image and create a contour line

Note: You must have the line width set as 0.001mm

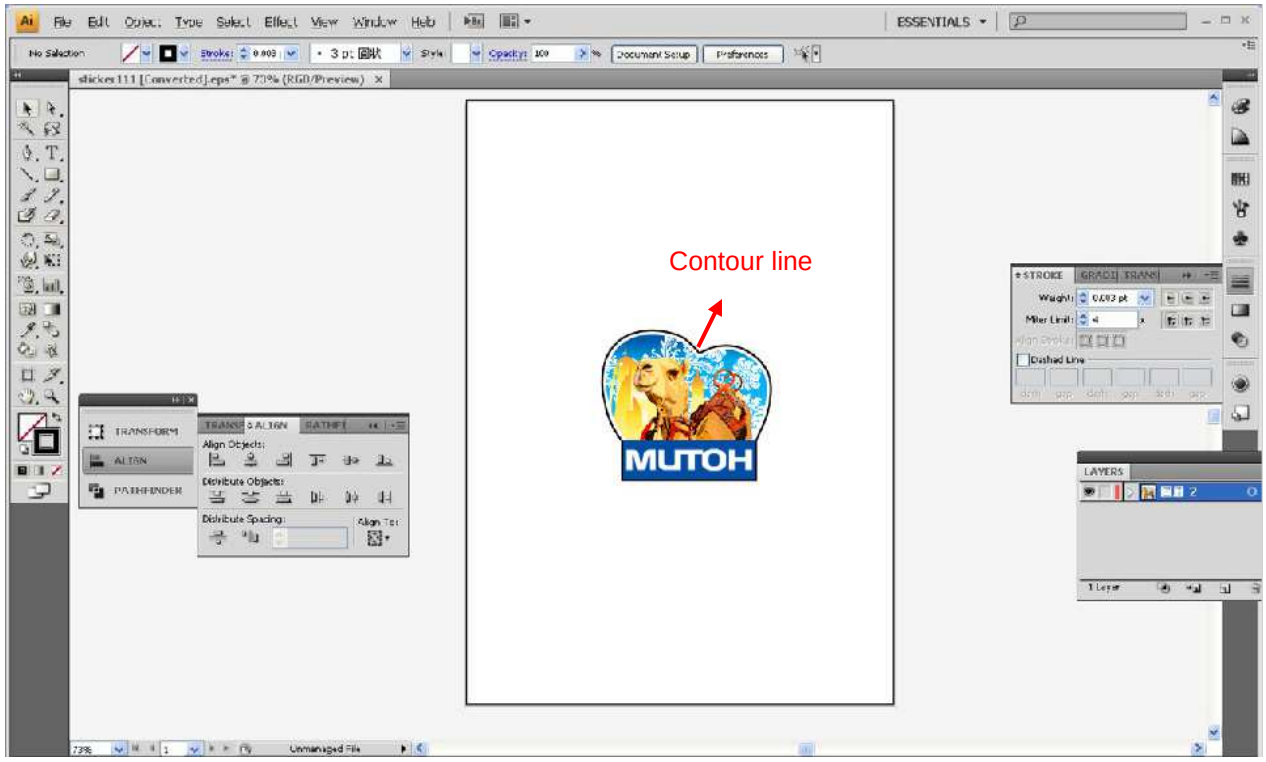

3) Click on the image and apply the AAS function (File→Scripts→_AASII_Plug_In)

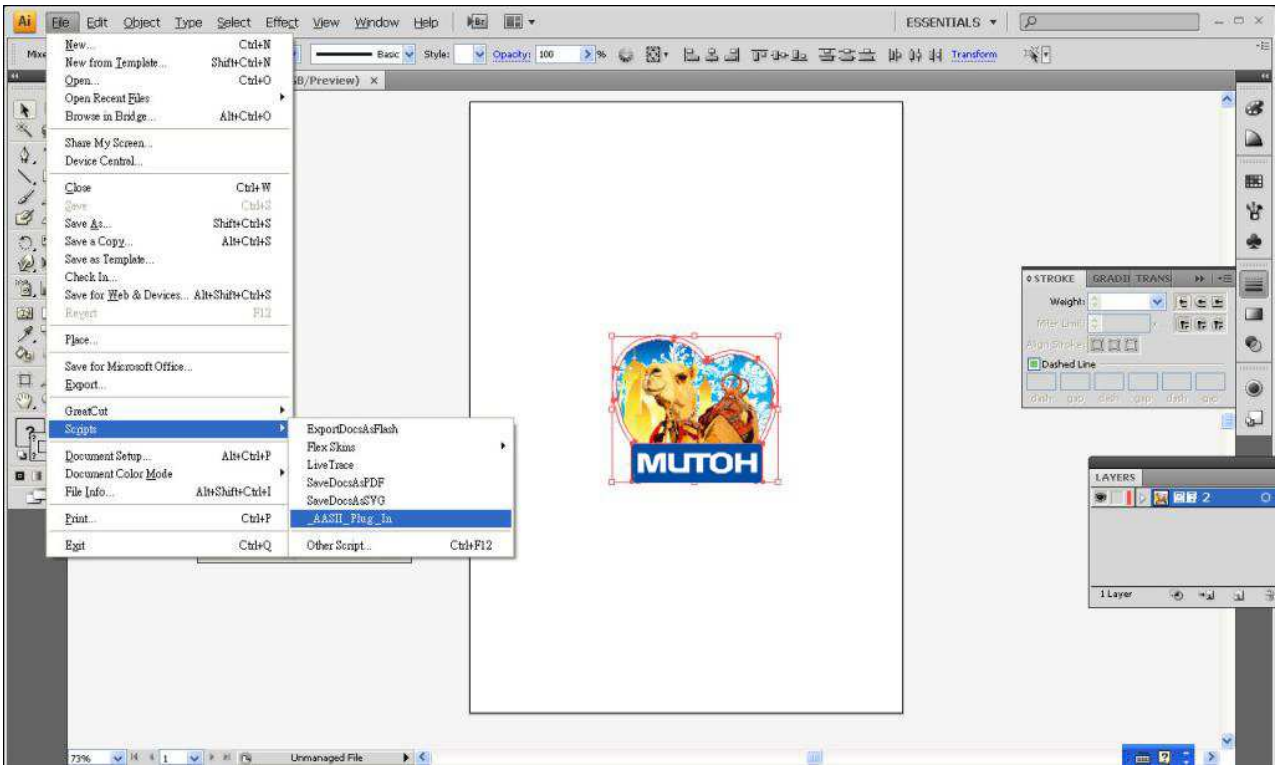

4) Select the registration marks needed

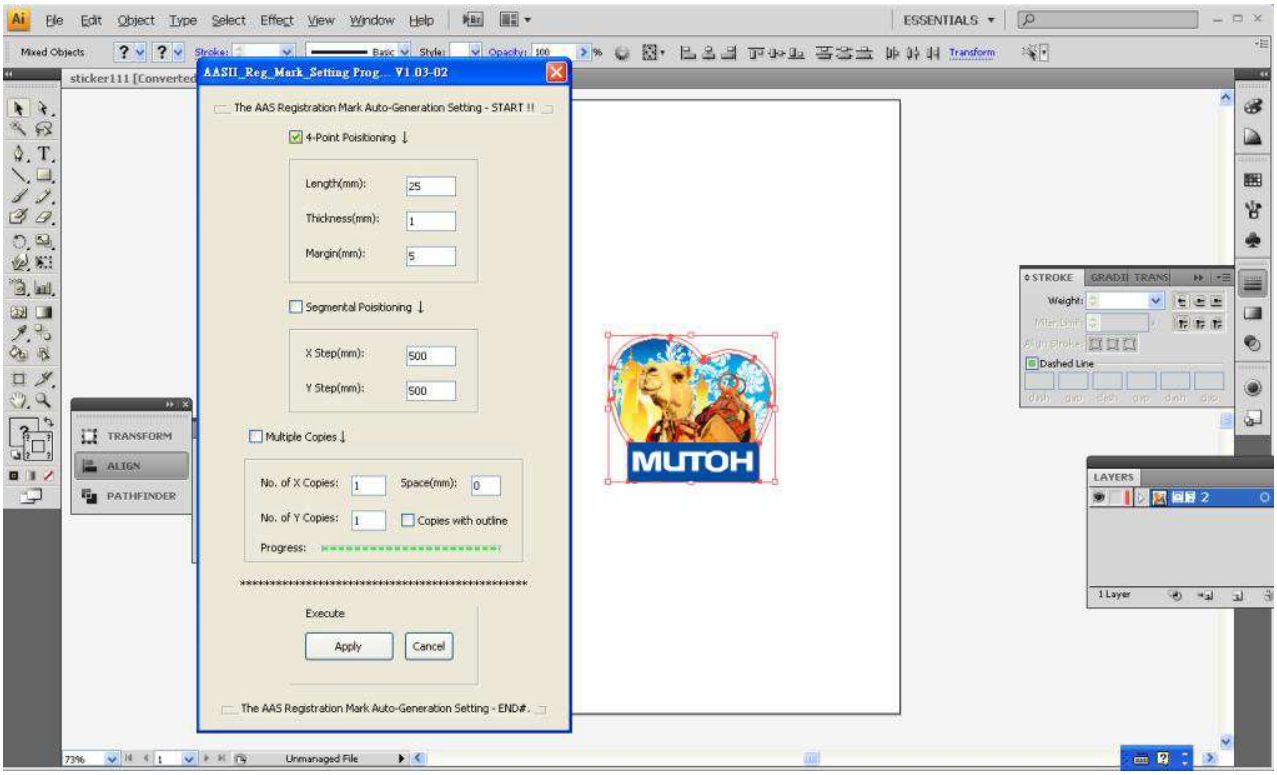

5) Three types of registration marks are introduced here: 4-Point Positioning, Segmental Positioning and Multiple Copies.

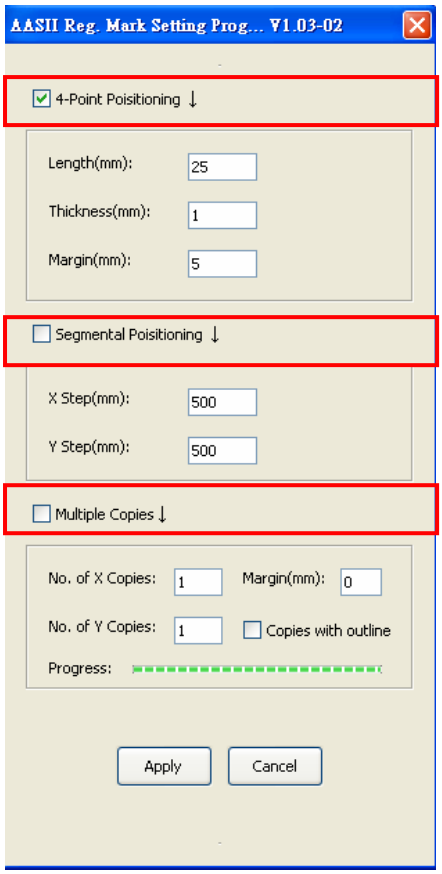

Note:
The values entered in the “4-Point Positioning” section (length, thickness and margin) will still be applied when you tick “Segmental Positioning” or “Multiple Copies”.

6) Confirm the registration marks (the 4-Point Position mark is used as an illustration in the following steps).

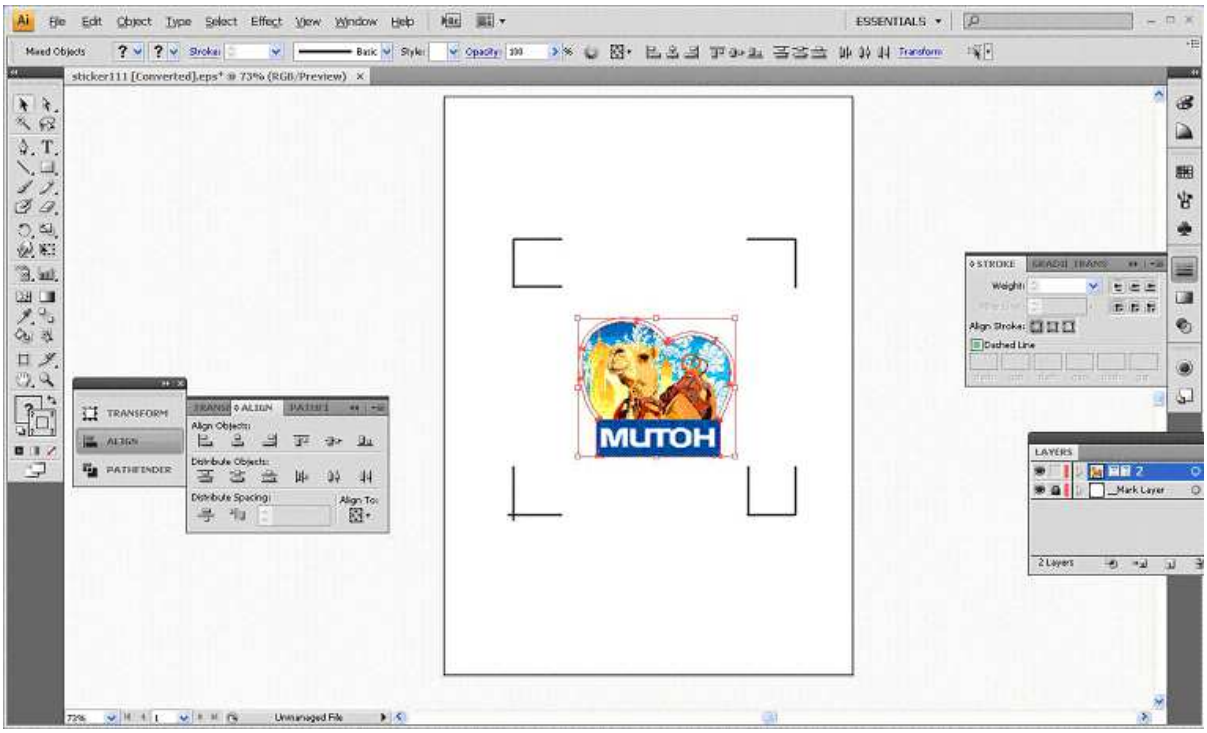

7) Click on the blank area on the page and then click “Document Setup”.

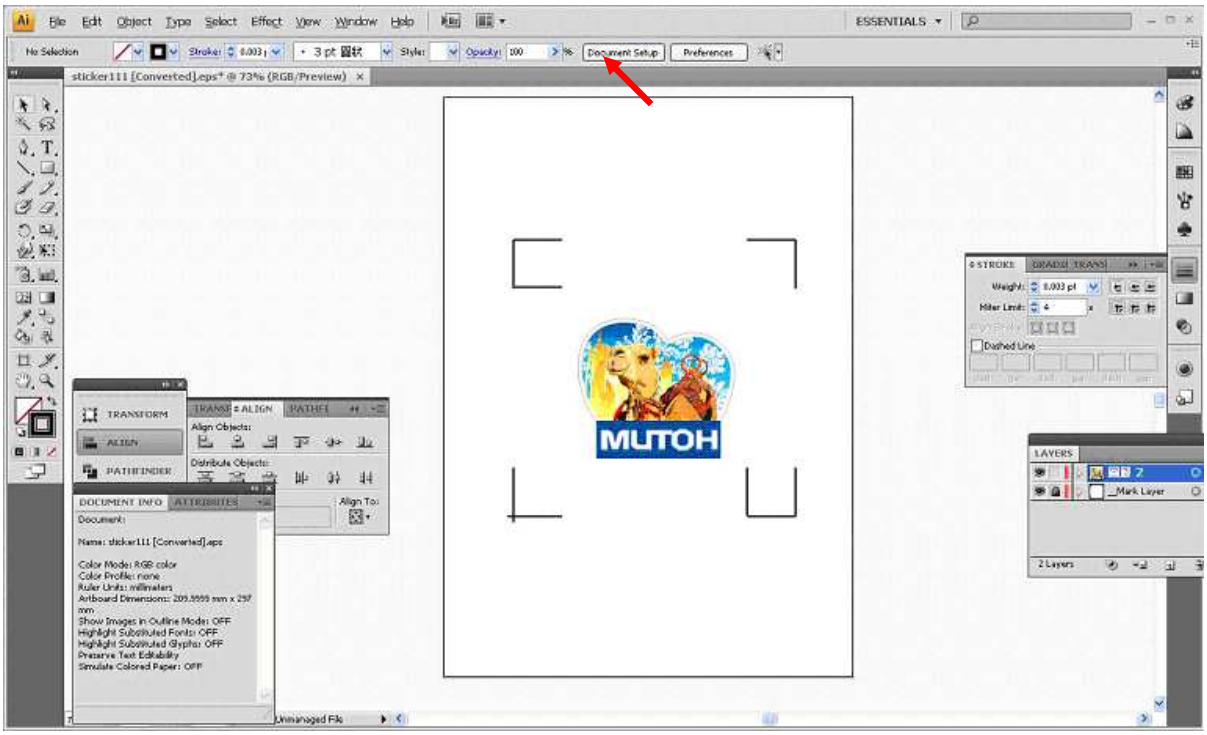

8) Hit “Edit Artboards”

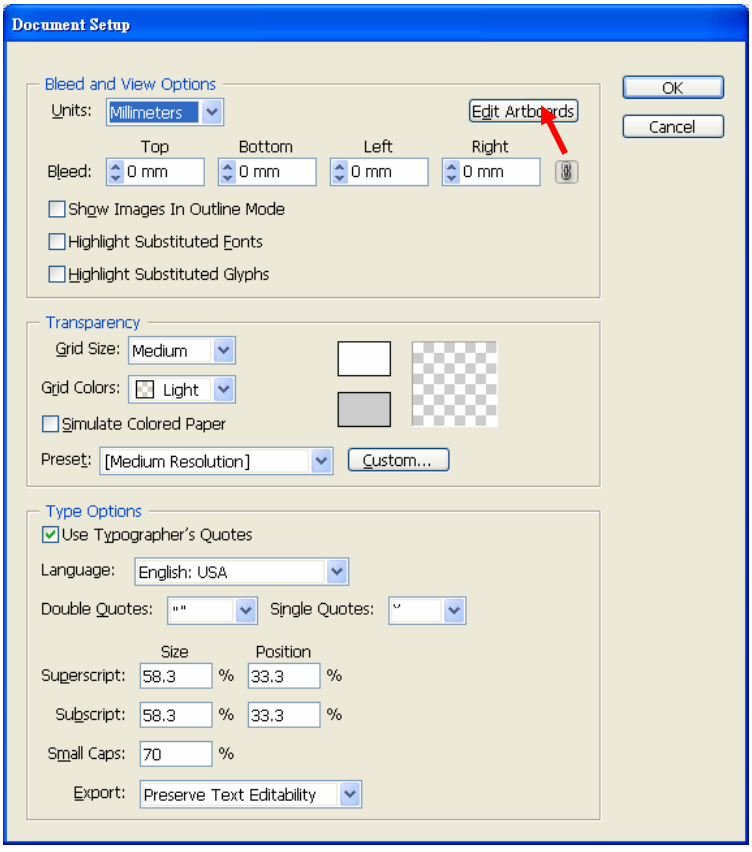

Note:
Keep all Bleed settings as zero when performing segmental cutting to ensure accurate output.

9) Click on “Presets → Fit Artboard to Artwork bounds”.

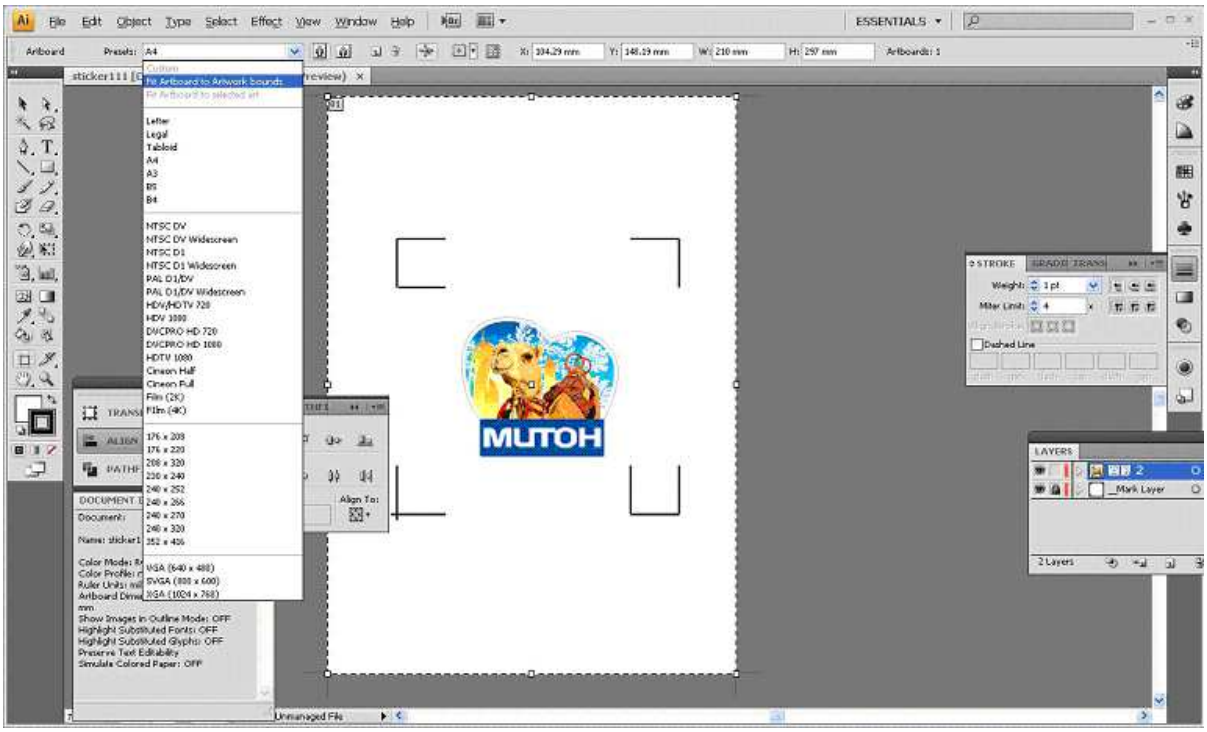

10) Please move your mouse to the tool bar on the left when step 10) is finished and then click “Selection Tool”.

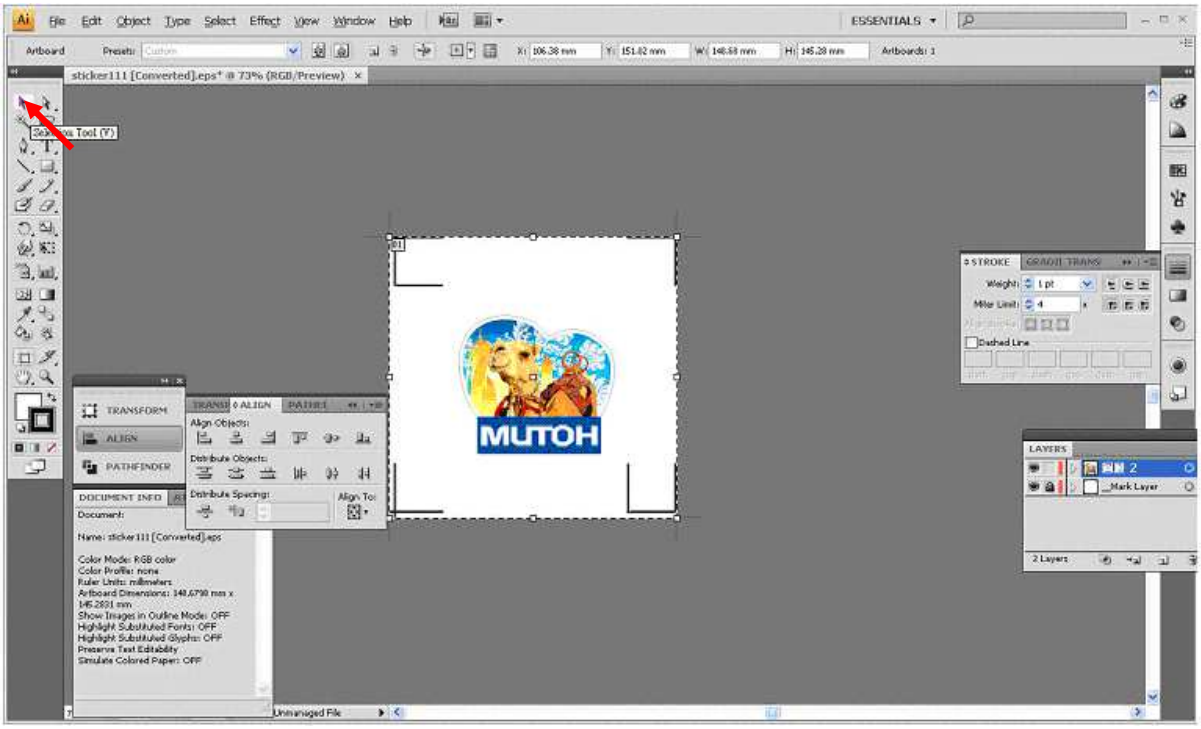

11) This will take you back to the edit mode.

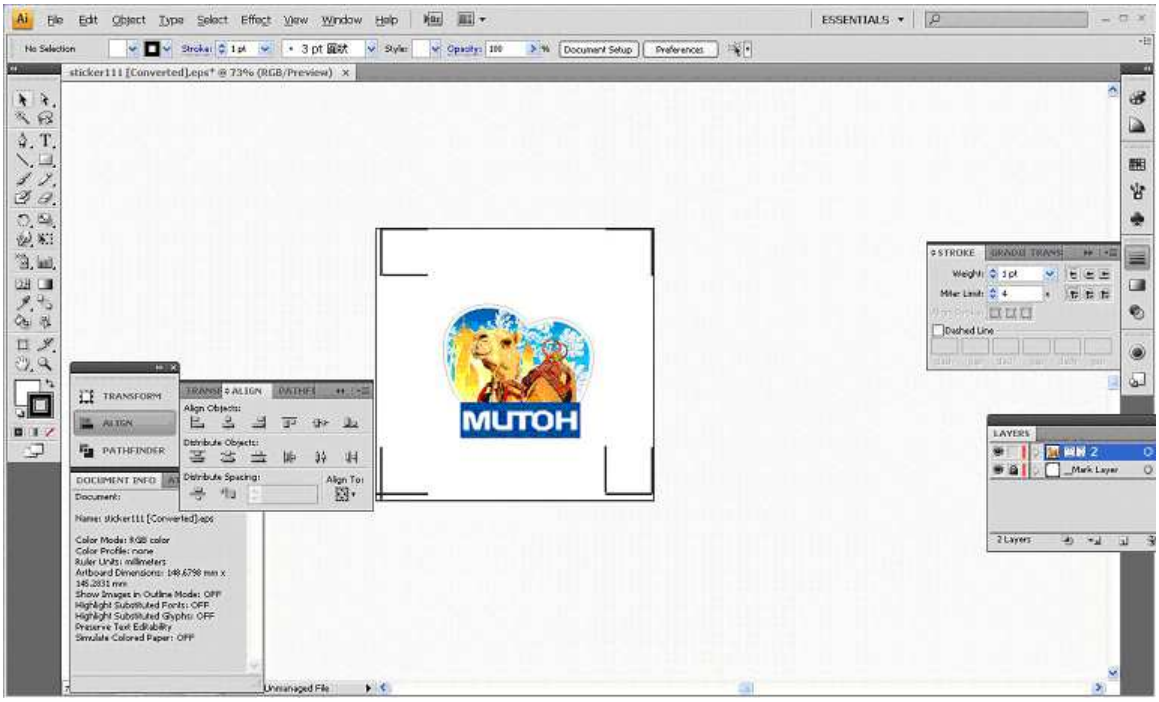

12) Print out the file with the contour line and the registration marks.

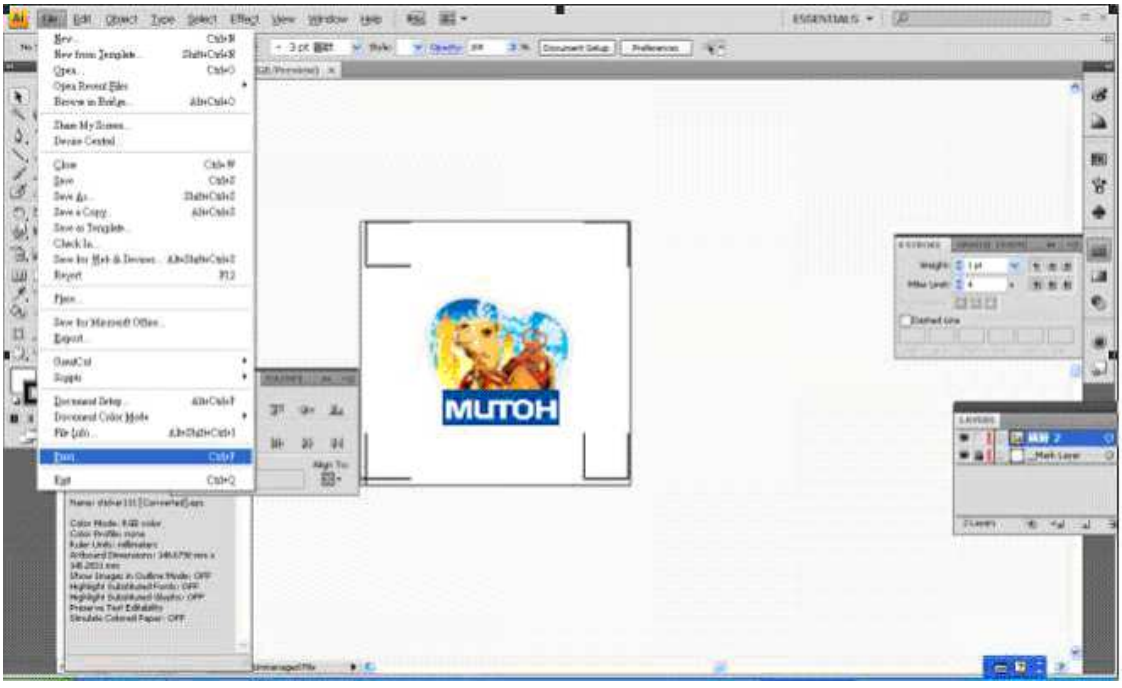

13) Place the printed file on the cutter, lower the pinch rollers and then position the carriage at the origin of the registration marks.

14) Send the file to the cutter.

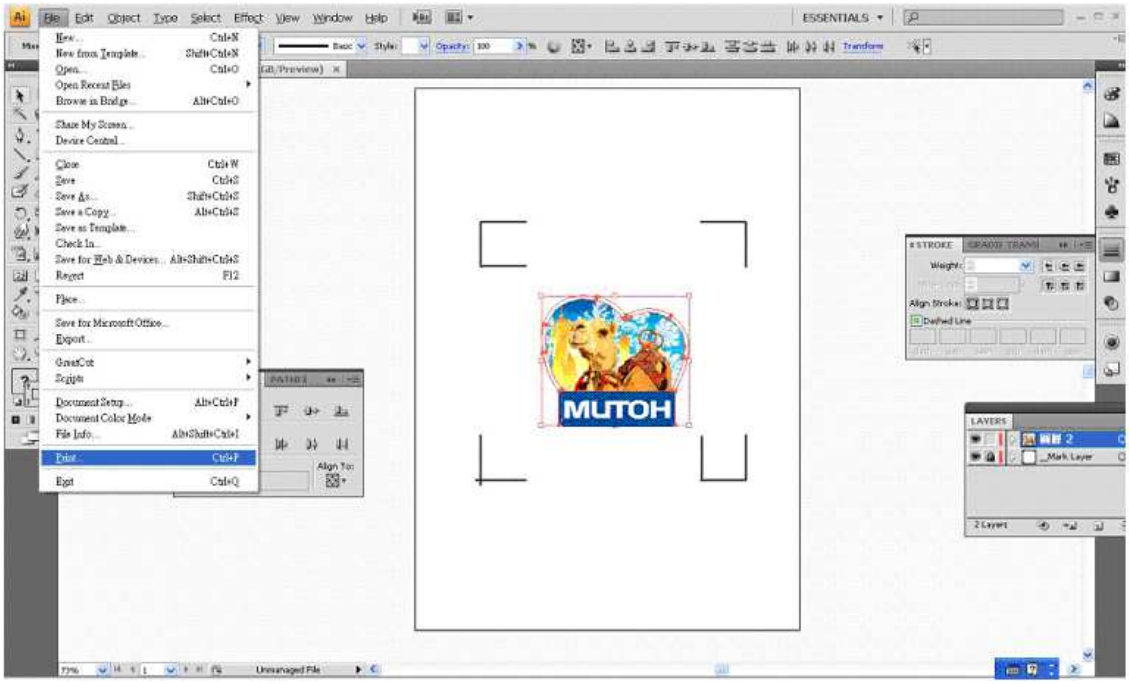

15) Select the cutter model, position the object in the bottom left corner and then click “Print”.

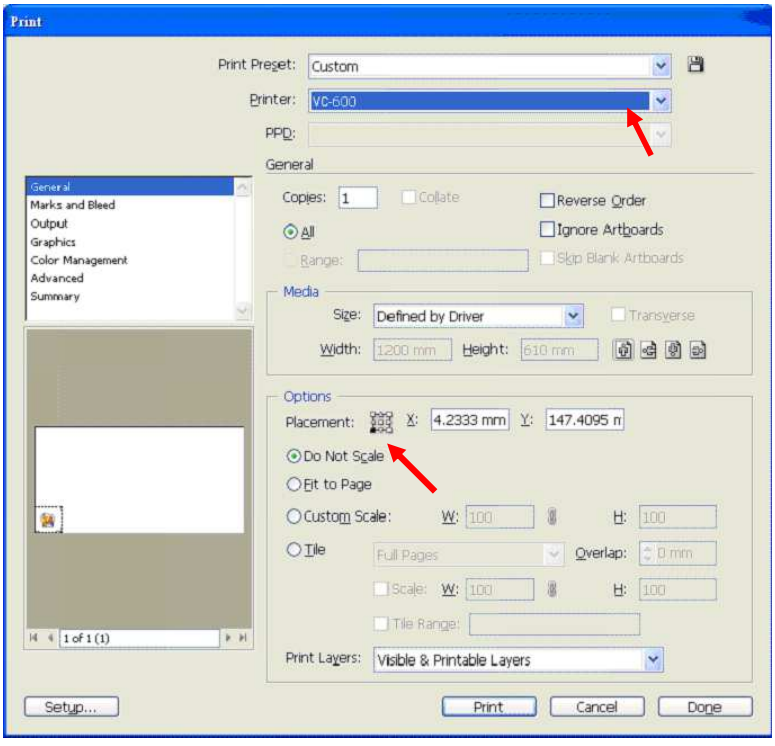

16) Your job is now completed.

Three types of registration marks

4-Point Positioning

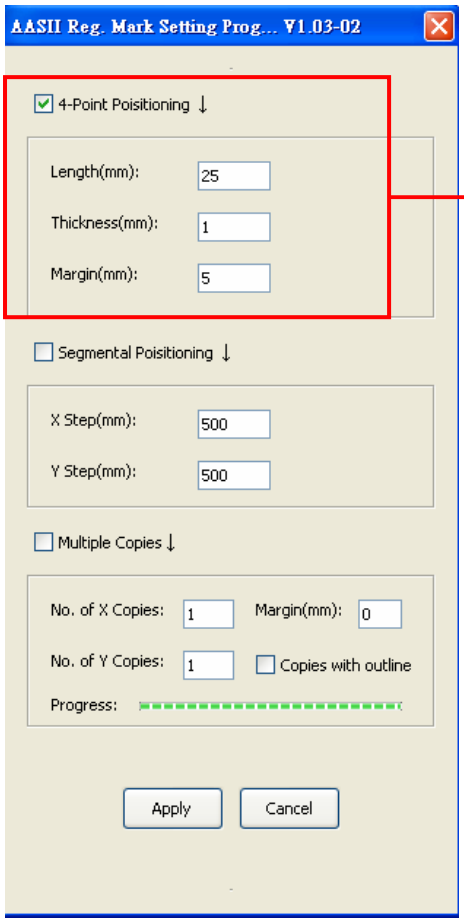

4-Point Positioning

- Length: The length of marks
  → Range: 5mm~50mm
  → Optimized Setting: 25mm
- Thickness: The line thickness of marks
  → Range: 1mm~2mm
  → Optimized Setting: 1mm
- Margin: The distance between marks and images
  → Range: 0mm~50mm
  → Optimized Setting: 5mm

The system will create the 4 marks as shown in the picture below.

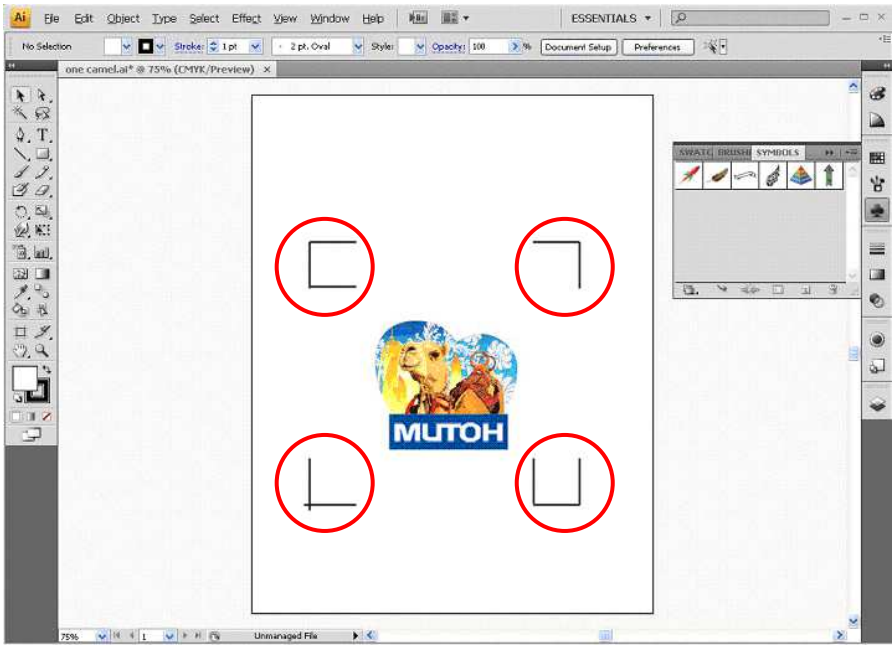

Note:
The values entered in the “4-Point Positioning” section (length, thickness and margin) will still be applied when you tick “Segmental Positioning” or “Multiple Copies”.

1. To save your materials, in addition to amending object margins, you can also adjust the length of the registration marks (5mm minimum) when you apply 4-Point Positioning (see table 1 for suggestions based on different material sizes). The smaller the size is, the smaller the distance between the object and the registration marks is (see the Şekils below).

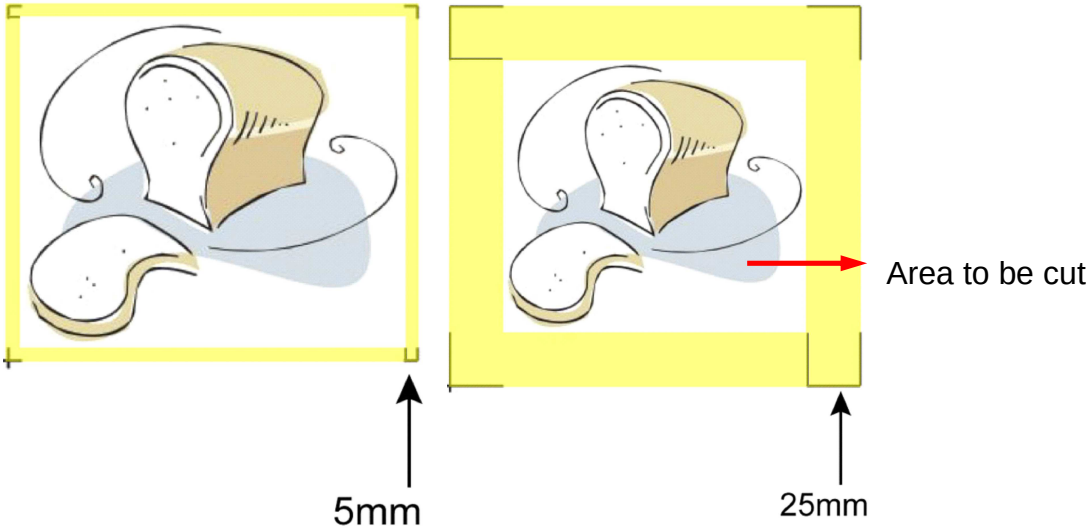

Page size (unit: inch)	Suggested mark length (unit: mm)
A6 (4.13 × 5.83)	5
A5 (5.83 × 8.27)	8
A4 (8.27 × 11.69)	11
A3 (11.69 × 16.54)	16
A2 (16.54 × 23.39)	23
A1 (23.39 × 33.11) and above	25*

Table 1
*25mm is the suggested value for the registration mark length

2. The size of the registration marks would affect the accuracy of registration mark detection so please make sure the amount you enter is reasonable.

3. If you change the paper size, you will have to reset the registration marks otherwise the previous setting will be applied.

Segmental Positioning

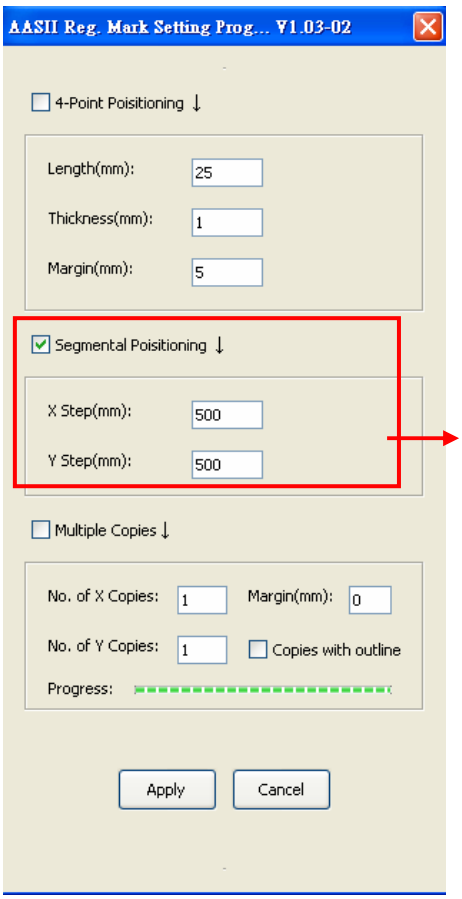

For precise cutting quality, it is suggested to select “Segmental Positioning” when you are working on an extra long or large-sized image to increase cutting accuracy.

Segmental Positioning

- X Adım: The distance of intermediate position on the X axis
- Y Adım: The distance of intermediate position on the Y axis
  → Range: 200mm~600mm
  → Optimized Setting: Less than 500mm

The system will create the marks as shown in the picture below

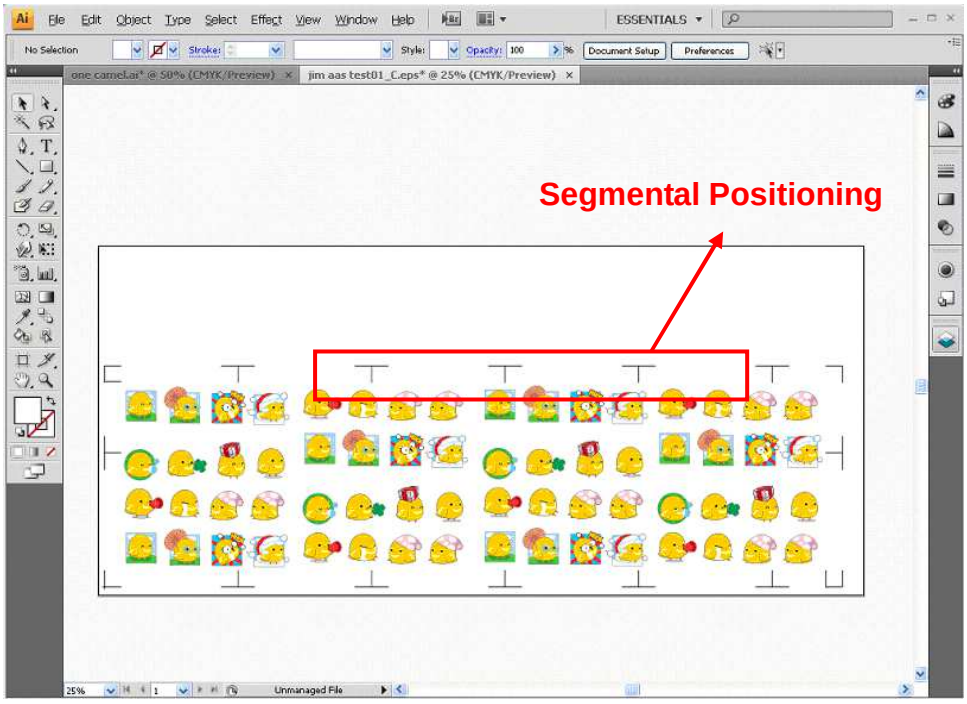

Multiple Copies

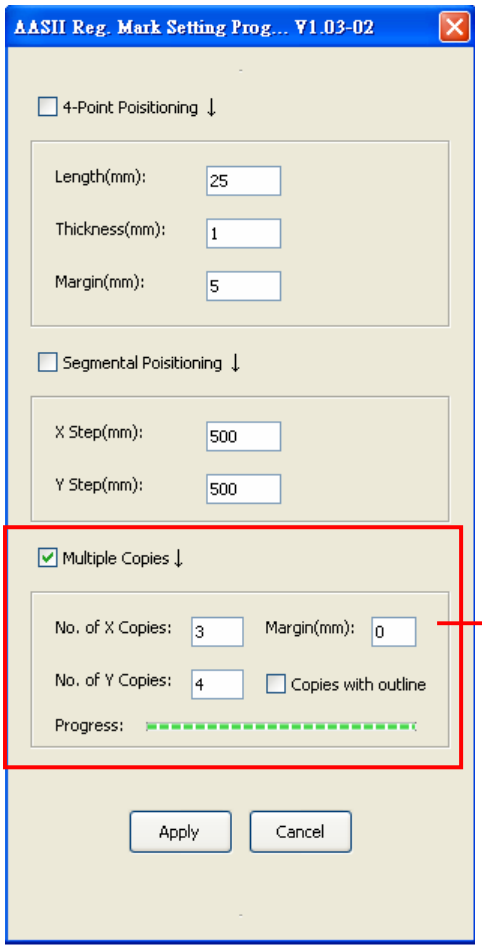

It is suggested to select “Multiple Copies” when you would like to make several copies of one image on your material to increase cutting accuracy.

Multiple Copies

- No. of X Copies: The numbers of copies on X axis
- No. of Y Copies: The numbers of copies on Y axis
  → Range: 1~50. (The more copies you make, the more time is needed for data transmission.)
  → Numbers of X Copies * Numbers of Y Copies = The total amount of image copies
- Copies with outline：To show outlines of image graphics
- Margin: Space between marks; must be 0 or ≧ 20, no negative numbers allowed

The system will create the as shown in the picture below.

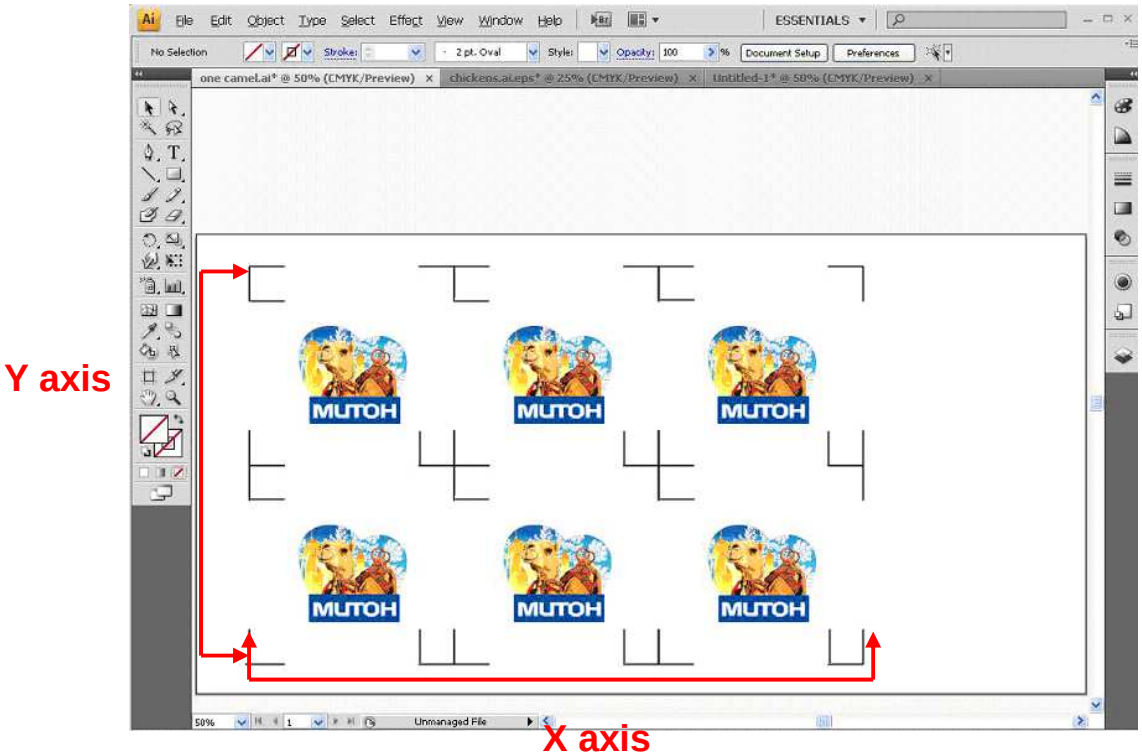

MUTOH

MUTOH INDUSTRIES LTD.
Tel.:81-(0)3-6758-7020
Fax:81-(0)3-6758-7025
E-mail:ibd@mutoh.co.jp
http://www.mutoh.co.jp/en/index.html

MUTOH AMERICA INC.
Tel.:1-480-968-7772
Fax:1-480-968-7990
E-mail:sales@mutoh.com
http://www.mutoh.com

MUTOH BELGIUM nv
Tel.:32-(0)59-561400
Fax:32-(0)59-807117
E-mail:mutoh@mutoh.be
http://www.mutoh.be

MUTOH DEUTSCHLAND GmbH.
Tel.:49-(0)211-385474-0
Fax:49-(0)211-385474-74
E-mail:vertrieb@mutoh-gmbh.de
http://www.mutoh.de

MUTOH North Europe S.A.
Tel.:352-445-906
Fax:352-447-093
E-mail:info@segroup.lu
http://www.segroup.lu/

MUTOH HONGKONG LTD.
Tel.:852-2377-3411
Fax:852-2377-3422
http://www.mutoh.co.jp/en/index.html

MUTOH SINGAPORE PTE.LTD.
Tel.:65-6325-3150
Fax:65-6220-4342
http://www.mutoh.co.jp/en/index.html

MUTOH AUSTRALIA PTY. LTD.
Tel.:61-2-9437-1366
Fax:61-2-9436-2871
E-mail:sales@mutoh-au.com
http://mutoh-au.com/